

ABG 6820 ABG 7820

ASPHALT PAVERS TRACKED

EU STAGE V



Total paver control

- EPM3: intuitive control with a bird's eye view of a paver on the display
- Consistent, high-quality paving; transfer data from job-to-job with the Settings Manager
- Pave Pilot with Thermal Profiling, Weather View and Material Manager
- Lowest noise level in class simplifies communication with the paving team
- Unhampered visibility around the paver
- Different optional lighting kits boost safety when working at night

Long-lasting paving performance

- Premium Deutz (Volvo) Stage V engine combines high torque and low RPM for superior, long-lasting performance
- Powertrain components are perfectly harmonised for high efficiency
- Adaptive Eco Mode matches engine output to demand
- Electronically adapted speed of the hydraulic cooling fan lowers noise and fuel consumption
- Pave Pilot provides a powerful set of tools to improve performance, efficiency and paving quality
- Auto track tensioner for smooth paving starts*

Supreme screed technology

- ABG screeds deliver the best pavement quality, uniformity and smoothness
- Selection from a variety of single or double tamper screeds
- Special crown profiles in road surfaces with VB 79/89 or VDT-V 79/89
- Easy screed control with the clear screed panel design
- Quick-coupling for easy vario screed extension assembly*
- Fully hardened tamper bars significantly extend lifetime

Focus on uptime

- Service Interval Manager notifies the operator of required maintenance
- Ammann ServiceLink telematics system
- Service access from the platform provides ease of maintenance
- ABG service kits save time, lower costs and offer the latest technical advantages

**AN ABG EXCLUSIVE FEATURE*

AMMANN

ABG 6820 | ABG 7820

EU Stage V

ENGINE		ABG 6820	ABG 7820
MANUFACTURER		Volvo (Deutz)	Volvo (Deutz)
MODEL		D6J	D8J
FUEL		Diesel	Diesel
OUTPUT	kW	140	175
	hp	190	238
AT ENGINE SPEED	r/min	2 000	1 800
COOLANT		Liquid	Liquid
FUEL TANK CAPACITY	l	250	250
EXHAUST EMISSION		EU Stage V	EU Stage V

PAVING

OUTPUT (THEORETICAL)*	t/h	700	900
MAT THICKNESS (MAX)	mm	300	300

*The actual paving output depends upon the mat thickness, the paving width and paving speed and will vary according to paving conditions prevailing on your jobsite.

SPEED

PAVING (MAX)	m/min	20	20
TRANSPORT (MAX)	km/h	3.3	3.6

UNDERCARRIAGE

LENGTH	mm	3 000	3 000
WIDTH (TRACK PLATES)	mm	300	300

CONVEYOR

HOPPER CAPACITY	t	13.5	13.5
NUMBER OF CONVEYORS		2	2
CONVEYOR SPEED (MAX)	m/min	21	24

AUGER

SPEED (MAX)	1/min	95	95
DIAMETER	mm	360	360

DIMENSIONS		ABG 6820	ABG 7820
LENGTH WITH VARIO SCREED (WALKWAY UP)	mm	6 120	6 120
WIDTH	mm	2 548	2 548
HEIGHT	mm	3 785	3 785
HEIGHT (TRANSPORT)	mm	2 934	2 934

WEIGHT

TRACTOR UNIT	kg	14 350	14 900
--------------	----	--------	--------

All weights are approx. weights without options.
Weight of tractor without screed, with standard hopper, with fuel tank half full, with towing arms separated, with push roller D=110 mm, and incl. 75 kg driver.

MAX. ALLOWABLE GRADEABILITY

TRACTOR UNIT + SCREED	%	25	25
-----------------------	---	----	----

Applies to screed VB 78 2.5–5.0 m.
When using extensions the max. allowable gradeability will be reduced.

SOUND LEVEL

L_{pA} Sound Pressure Level at Driver's Ear, acc. to ISO 11201	dB	82	82
L_{WA} Guaranteed Sound Power Level, acc. to Directive 2000/14/EC	dB	105	105

VIBRATION

HAND-ARM VIBRATION according to ISO 5349:2001	m/s ²	<2.5	<2.5
WHOLE BODY VIBRATION according to ISO 2631:1997	m/s ²	<0.5	<0.5

ELECTRICAL SYSTEM

BATTERY VOLTAGE	V	24	24
-----------------	---	----	----


OPERATING WEIGHTS¹ OF SCREEDS IN KG² AT WORKING WIDTH

	2.5 m	5 m	6 m	6.5 m	7.5 m	8 m	8.5 m	9 m	9 m (V)	10 m	11 m
ABG 6820											
VB 78	-	3 600	-	5 222	5 802	6 342	-	6 923	-	-	-
VDT-V 78	-	3 850	-	5 592	6 192	-	-	-	-	-	-
VDTA-V 78	-	3 870	-	5 622	6 222	-	-	-	-	-	-
VB 79	-	4 050	-	5 672	6 252	6 792	-	7 373	-	-	-
VDT-V 79	-	4 300	-	6 042	-	-	-	-	-	-	-
VDTA-V 79	-	4 320	-	6 072	-	-	-	-	-	-	-
VB 88	-	-	4 050	-	5 772	-	6 352	6 892	-	-	-
VDT-V 88	-	-	4 450	-	6 242	-	-	-	-	-	-
VDTA-V 88	-	-	4 470	-	6 272	-	-	-	-	-	-
MB 122	2 242	-	4 456	-	6 076	-	-	6 828	-	8 050	-
ABG 7820											
VB 78	-	3 600	-	5 222	5 802	6 342	-	6 923	-	-	-
VDT-V 78	-	3 850	-	5 592	6 192	6 832	-	7 433	-	-	-
VDTA-V 78	-	3 870	-	5 622	6 222	6 872	-	7 473	-	-	-
VB 79	-	4 050	-	5 672	6 252	6 792	-	7 373	-	-	-
VDT-V 79	-	4 300	-	6 042	6 642	7 282	-	7 883	-	-	-
VDTA-V 79	-	4 320	-	6 072	6 672	7 322	-	7 923	-	-	-
VB 88	-	-	4 050	-	5 772	-	6 352	6 892	-	7 473	-
VDT-V 88	-	-	4 450	-	6 242	-	6 842	7 482	-	-	-
VDTA-V 88	-	-	4 470	-	6 272	-	6 872	7 522	-	-	-
VB 89	-	-	4 500	-	6 222	-	6 802	7 342	-	-	-
VDT-V 89	-	-	4 800	-	6 642	-	7 242	7 882	-	-	-
VDTA-V 89	-	-	4 820	-	6 672	-	7 272	7 922	-	-	-
MB 122	2 242	-	4 456	-	6 076	-	-	6 828	7 454	8 050	8 575
VDT 121	2 442	-	4 903	-	6 680	-	-	7 531	8 193	-	-

¹ Including auger extensions, channel plates, end gates, towing arms rear, etc.

² All screeds electrically heated


TRACKED ASPHALT PAVERS

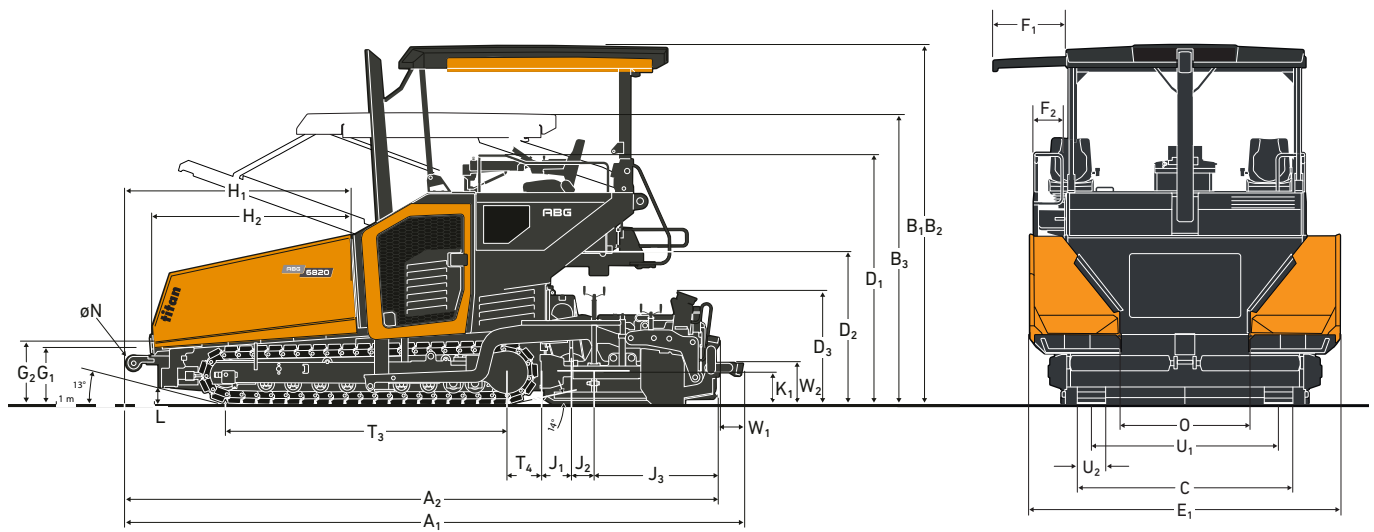

DIMENSIONS [mm]

ABG 6820 | ABG 7820

A ₁	OPERATING LENGTH	6388
A ₂	SHIPPING LENGTH	6120
B ₁	OPERATING HEIGHT	3785
B ₂	HEIGHT WEATHER ROOF	3785
B ₃	SHIPPING HEIGHT	2910
C	TRACTOR WIDTH	2548
D ₁	HEIGHT RAILING	2640
D ₂	DECK HEIGHT	1615
D ₃	SCREED HEIGHT	951
E ₁	OUTER HOPPER WIDTH	3255
E ₂	INNER HOPPER WIDTH	3175
E ₃	WIDTH OSCILLATING BEAM	2495
F ₁	EXTENSION WEATHER ROOF	770
F ₂	SEAT CONSOLE EXTENSION	317
G ₁	INNER LOADING HEIGHT (WITHOUT/WITH FRONT APRON)	525 / 593
G ₂	OUTER LOADING HEIGHT (WITHOUT/WITH FRONT APRON)	606 / 606
H ₁	HOPPER LENGTH TO PUSH ROLLER	2329
H ₂	HOPPER LENGTH	2201
J ₁	DISTANCE REAR WALL AUGER CENTRE	275
J ₂	DISTANCE AUGER SCREED	265
J ₃	SCREED DEPTH	1297
K ₁	AUGER HEIGHT TO GROUND (CENTER)	360 ± 75
K ₂	DIAMETER AUGER	360
L	GROUND CLEARANCE	155
N	DIAMETER PUSH ROLLER	160
O	CONVEYOR WIDTH	1345
S ₁	BASIC SCREED WIDTH	2500 / 3000
S ₂	EXTENDED SCREED WIDTH	5000 / 6000
T ₃	TRACK LENGTH	3000
T ₄	TRACK DISTANCE TO REAR WALL	398
U ₁	TRACK GAUGE CENTRE TO CENTRE	1969
U ₂	TRACK PAD WIDTH	300
W ₁	WIDTH OF WALKWAY	305
W ₂	HEIGHT OF WALKWAY	435

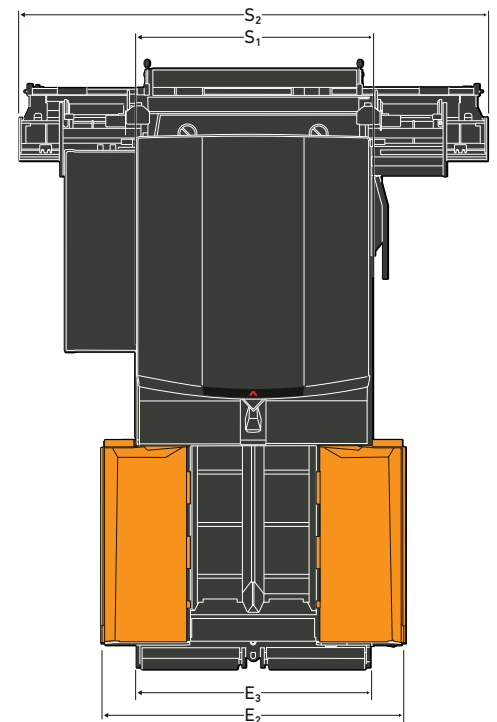

EQUIPMENT

STANDARD EQUIPMENT

Engine

- Deutz (Volvo) Diesel engine, EU Stage V

Drive

- Electronic drive control
- Lifetime lubricated crawler track rollers
- Forged and hardened crawler track links
- Automatic track tensioner

Material management

- Proportional conveyor sensors
- Four individual hydrostatic drives for conveyors and augers
- Reversible direction of auger rotation
- Hydraulic auger height adjustment
- Proportional ultrasonic sensor auger control

Electrics and electronics

- Electronic Paver Management (EPM 3)
- ECO mode
- Settings Manager
- Service Interval Manager
- Adjustable and revolving main control panel at operator platform

- Two adjustable and revolving screed control panels
- Battery master switch
- Electric switch cabinet
- Generator for electric screed heating

Structure

- All-weather roof of GRP (glass-fibre reinforced plastic)
- Two seats, laterally extendable
- Anti-vandalism kit
- Near field mirrors at weather roof
- ABG Key

Screed

- Split towing arms
- Screed lock
- Quick coupling system for vario screeds
- Hydraulic crown adjustment vario screeds

Lights

- Operator's platform lighting
- Home light function

Environmental

- Sound insulation

OPTIONAL EQUIPMENT

Material management

- Smart Dock
- Soft Dock
- Heavy push rollers
- Individual operating hopper wings
- Hydraulically operated front apron
- Auger quick lock system
- Heavy duty auger
- Protective half shells for auger shaft
- Auger extensions and additional auger bearings
- Heavy duty conveyor cover
- Reversible conveyor
- Central lubrication
- Front track scraper hydraulic
- Feeder stop

Electrics and electronics

- 230V power sockets
- Lateral emergency stop
- High ambient temperature fan
- Ammann ServiceLink
- Pave Pilot
- Smart View camera system
- Levelling equipment
- Transport case for EPM control panels
- On-board diagnostic function for manual screed heating bars
- White noise alarm

Structure

- Deluxe seats with heating
- Front windscreen
- Tarpaulin side curtains for weather roof
- Custom colours
- Electrohydraulic powered weather roof
- Front ballast weight

Screed

- Screed spacer blocks
- Screed assist
- Screed anti-climbing lock
- Screed load device
- Screed tensioning device
- Hydraulic height adjustment of extendable screed
- Special profiles VB 79, VB 89
- Hydraulically adjustable
- Power-Float screed end gates
- Heatable screed end gate
- Foldable screed walkway

Lights

- Basic Kit Halogen
- Basic Kit LED
- Work Plus Kit LED
- Full Night Kit LED
- Warning beacons LED
- Two balloon lights LED

Environmental

- Fume extractors
- Emulsion spraying system
- High performance spray cleaning unit
- Biodegradable hydraulic oil