


WIBE CABLE TRAYS FOR DEMANDING APPLICATIONS CATALOGUE 2025

Cable support solutions

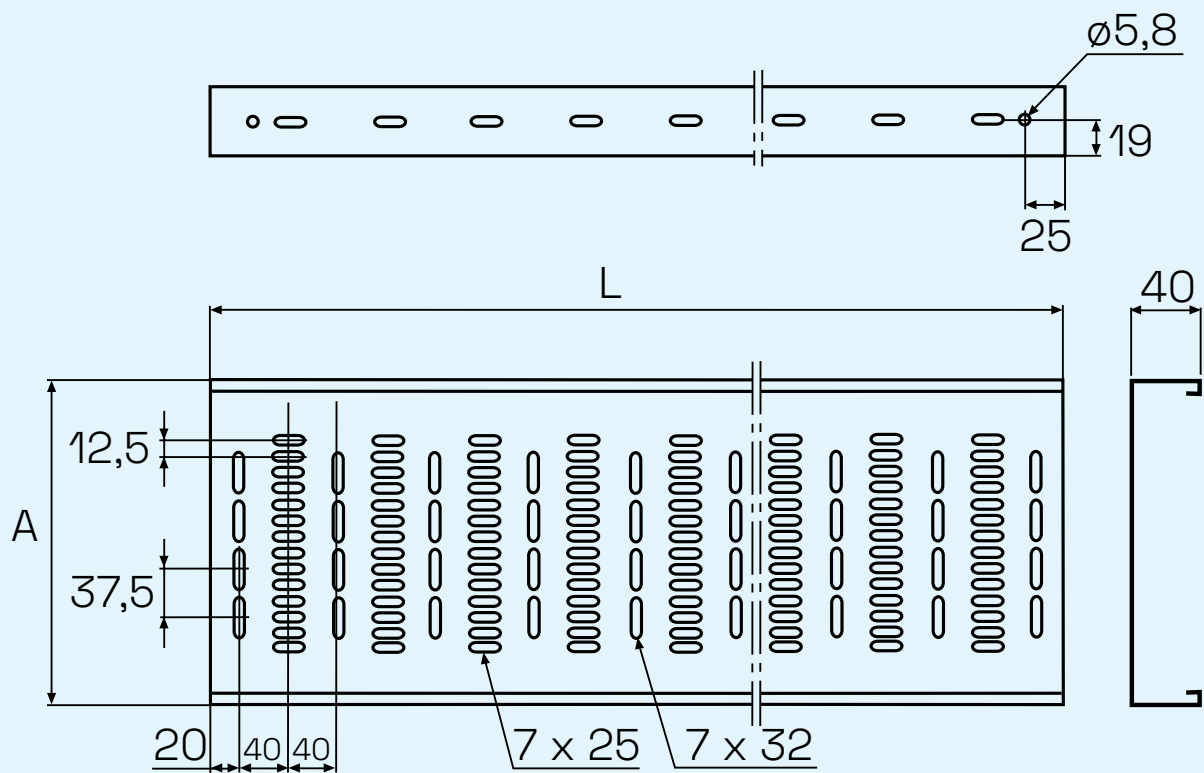


Creating clever, uplifting
solutions, together with our
clients for almost 100 years.
Reimagined in June 2021
– for the coming century.

Looking ahead to the next century, we are reinventing ourselves – as Wibe Group – bringing together four of the world's leading cable management brands as a new independent company to offer a complete, innovative range of cable ladders, cable trays and mesh trays – for applications ranging from commercial buildings to extreme demanding industrial environments.





Wibe Group & sustainability



CO₂ and P&L impact through... Resource Performance

Eco Performance brings improved resource efficiency throughout an asset's lifecycle. This includes efficient use of energy and natural resources, along with the minimization of CO₂ emissions.

Cost of ownership optimization through... Circular Performance

We're helping our customers optimize the total cost of ownership of their assets. To do this, we provide IoT-enabled solutions, as well as upgrade, repair, retrofit, and remanufacture services.

Peace of mind through... Well-being Performance

Eco Performance products are RoHS and REACh compliant. We're going beyond regulatory compliance with step-by-step substitution of certain materials and substances from our products.

Improved sales through... Differentiation

Eco Performance delivers strong value propositions through third-party labels and services. By collaborating with third-party organizations we can support our customers in meeting their sustainability goals such as green building certifications.

Content

Corrosion classes	8
Surface treatments	9
Potential balancing	10
Electro-magnetic compatibility EMC	11
Installation regulations	12
Standards and Quality	13
Installation summary	16
Suspension components	16
Steel cable trays	18
Pre-galvanized	18
CLX ³ Click suspension	36
Pre-galvanized white	38
Hot-dip galvanized	54
Zinkpox	64
Stainless steel	74
Technical information	79
Use and installation	79
Reference number overview	158


The right surface treatment – crucial for a successful outcome

A cable support installation is considered to be a long-lasting solution and the life expectancy is dependent on the environment in which it is placed. A thorough investigation of the setting in terms of corrosion, pollution, humidity, salt, sanitary regulations etc will help you make the best choice. Our range of cable ladders and accessories covers all types of surface treatments, enabling a reliable, cost-efficient and long-lasting cable support solution.

C1 Electro-galvanized

Indoor environments: Schools, shops, hotels, offices, sports halls etc.


- Very low environmental corrosion.
- Heated areas.
- Arid atmosphere.
- Insignificant quantities of pollutant.
- ISO 2081

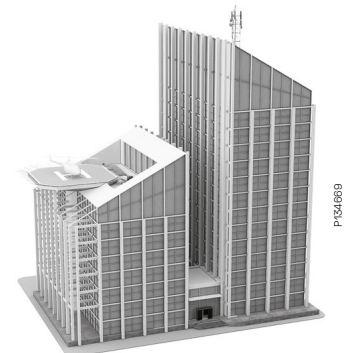

C2 Pre-galvanized

Partly outdoor environments: Industries, sports halls, warehouses, shops, rural outdoor areas etc.


- Low environmental corrosion.
- Non-heated areas with fluctuating levels of temperature and humidity.
- Few instances of condensation and low levels of airborne pollution.
- SS-EN 10346

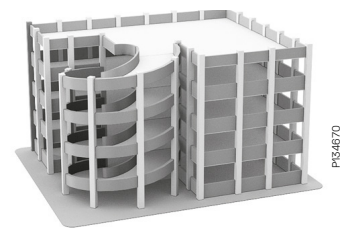

C3 Hot-dip galvanized

Indoor- and outdoor environments: Urban and light industrial areas, breweries, dairies, laundries etc.


- Average environmental corrosion.
- Areas with average levels of humidity and some airborne pollution caused by production processes.
- Atmospheres containing some salt or average levels of airborne pollution.
- EN-ISO1461/EN 10346 (Z+)



C4 Hot-dip galvanized

Indoor- and outdoor environments: Chemical plants, industrial and coastal areas, swimming pools, farms, dockyards etc.

- High environmental corrosion.
- Areas with high levels of humidity and considerable airborne pollution.
- Atmospheres with average salt content or discernible levels of airborne pollution.
- EN-ISO1461




P1344672

C5 Zinkpox® (Hot dip galv. + powder coated)

Stainless steel AISI 304

Indoor- and outdoor environments: Chemical and heavy industries, tunnels, swimming pools, dockyards etc.

- Very high (industrial) environmental corrosion.
- Areas with almost permanent condensation, large quantities of airborne pollution, high levels of humidity and aggressive atmospheres
- EN 1.4301 acc. to EN 10088/AISI 304




P1344675

CX Stainless steel AISI 316L

Indoor- and outdoor environments: Heavy industries, coastal and offshore areas, purifying plants etc.

- Very high (marine) environmental corrosion.
- Areas with almost permanent condensation and large quantities of airborne pollution. Atmospheres with high salt content.
- EN 1.4404 acc. to EN 10088/AISI 316L



P1344676

Corrosion classes

The life expectancy of a cable support system is dependent on the environment in which it is placed. Therefore, it is important to establish the corrosive properties of an environment to ensure that the right treatment and the right material are chosen. Do not use components finish above of the corrosion class targeted. The table below shows various corrosion classes. As a guide, we have included the surface treatment recommended by Wibe Group for the different classes.

On the next page, we briefly outline the various surface treatments and materials.

As regards environmental corrosion, a steel design component can usually be assigned to one of the corrosion classes (C1 to CX) as shown in table A. Reference values for the average level of corrosion in steel and zinc are given in table B.

The corrosion classes comply with those stipulated in SS-EN ISO 12944-2.

Table A

Corrosion classes as stipulated by SS-EN ISO 12944-2 with atmospheric corrosion levels and examples of the environment in which they are most suitable for use.

Corrosion class		C1	C2	C3	C4	C5	CX
Environmental corrosion		Very low	Low	Average	High	Very high	Extremely high
Examples of typical environments in temperate climates (informative)	Outdoors	–	Atmospheres with low levels of airborne pollution. Rural areas.	Atmospheres containing some salt or average levels of air-borne pollution. Urban and light industrial areas. Areas affected by coastal conditions.	Atmospheres with average salt content or discernible levels of airborne pollution. Industrial and coastal areas.	Industrial areas with high humidity and aggressive atmosphere, and coastal areas with high salinity.	Offshore areas with high salinity, industrial areas with extreme humidity, and aggressive atmospheres, sub-tropical or tropical atmospheres.
	Indoors	Heated areas with arid atmosphere and insignificant quantities of pollutant, e.g. offices, shops, schools and hotels.	Non-heated areas with fluctuating levels of temperature and humidity. Few instances of condensation and low levels of airborne pollution, e.g. sports halls and warehouses.	Areas with average levels of humidity and some airborne pollution resulting from production processes, e.g. breweries, dairies, laundries.	Areas of high humidity and considerable airborne pollution as the result of production processes, e.g. chemical plants, swimming pools and dockyards.	Buildings with almost permanent condensation and with high pollution.	Industrial buildings with extreme humidity and aggressive atmosphere.
Electro-galvanized		→ ●	→ ●	→ ●	→ ●	→ ●	→ ●
Pre-galvanized		→ ●	→ ●	→ ●	→ ●	→ ●	→ ●
Zinc+		→ ●	→ ●	→ ●	→ ●	→ ●	→ ●
Hot-dip galvanized		→ ●	→ ●	→ ●	→ ●	→ ●	→ ●
Zinkpox®		→ ●	→ ●	→ ●	→ ●	→ ●	→ ●
Stainless steel AISI304L		→ ●	→ ●	→ ●	→ ●	→ ●	→ ●
Stainless steel AISI316L		→ ●	→ ●	→ ●	→ ●	→ ●	→ ●
GRP**		→ ●	→ ●	→ ●	→ ●	→ ●	→ ●

→ ● Recommended surface treatment.
Very high durability (>20 years).
--> ○ Possible alternative.
High durability (10-20 years).

Table B

Mass losses for zinc in various corrosion classes

Corrosion class	Mass loss per surface unit and thickness reduction (1 year of exposure) ¹	
	Mass loss (g/m ²)	Thickness reduction (μm)
C1	≤ 0.7	≤ 0.1
C2	> 0.7 to 5	> 0.1 to 0.7
C3	> 5 to 15	> 0.7 to 2.1
C4	> 15 to 30	> 2.1 to 4.2
C5	> 30 to 60	> 4.2 to 8.4
CX	> 60 to 180	> 8.4 to 25

¹ Corrosion speed is generally higher when the material is first exposed

* Can be modified due to local environment and product life expectancy.

** See catalogue Mita Flex for GRP offer

Surface treatments

Wibe Cable Trays – Technical and material data

Specification:	Cold formed steels: DX5xD acc. to EN 10346, DCOx acc. to EN 10130, DD1x acc. to EN10111
	Structural steels: S235 and S355 acc. to EN 10025-2 AISI 316L acc. to EN ISO10088-2
Density:	7.7-7.85 kg/m ³
Surface treatment:	• Pre-galvanized (>20 µm): EN 10346 • Pre-galvanized (>20 µm), powder coated white NCS S 0500-N • Hot-dip galvanized (55-70 µm): EN ISO 1461 • Zinkpox, hot-dip galvanized (55-70 µm) + polyester coating, white RAL 9010 • Passivated (Stainless steel)
Resistance to impact	20 J (IEC 61537)
Temperature range	From -40°C to +120°C

Electro-galvanized

Products are manufactured in accordance with DIN 50961/ISO 2081. Such products are intended for use only in warm, dry areas with negligible pollutant levels.

Pre-galvanized

Products are manufactured from Z 275 pre-galvanized sheet steel in accordance with SS-EN 10327:2004. Under normal conditions, surface sections created during cutting and drilling will repair themselves, providing superb anti-corrosion protection.

Hot-dip galvanized

Wibe Group has one of the most modern hot-dip galvanization plants in the Nordic countries. The hot-dip process is continuous, guaranteeing a high and even quality. The manufactured products are hot-dip galvanized in accordance with EN-ISO 1461:2009 whilst nuts and bolts are hot-dip galvanized in accordance with SS-EN ISO 10684:2004. This form of galvanization affords very good value-for-money anti-corrosion protection in atmospheres with a pH value of between 6 and 13. However, in acidic environments where pH levels fall below 6 and in alkaline environments where the pH value exceeds 13, the protective zinc layer breaks down relatively quickly. When cuts/perforations or other kind of operation that damage or remove coating in HDG items suitable to be installed in aggressive corrosion class, must be repaired with a zinc rich paint.

Zinc+

Zinc+ surface treatment for some accessories (EN 10346) with a metallic Zinc-based alloy coating containing Aluminium and Magnesium that offers ultimate corrosion resistance in aggressive environments (e.g. chloride & highly alkaline). In many cases a good alternative to hot-dip galvanization. Excellent surface finish with self-repairing protection of cut edges (galvanic protection).

Zinkpox®

The Zinkpox® method involves applying a homogenous polyester coating to the zinc layer. Besides resisting light-initiated degeneration and weathering, this powder coating has excellent mechanical properties as regards impact resistance and adhesion. It is also resistant to most chemicals. Compared to hot-dip galvanizing, applying a polyester coating to the zinc layer more than doubles the service life of treated components. The zinc layer prevents the development of filiform corrosion. This might otherwise degrade the coating. Consequently, the polyester coating is subject only to atmospheric attack and thus protects the zinc layer. The certified coating plant that treats our components uses a modern and environment-friendly process. Before powder coating, the galvanized components undergo meticulous pre-treatment. This ensures superb adhesion. In addition to extremely good corrosion protection, the Zinkpox® method also offers a choice of colours. Powder coating is a very environment-friendly way of achieving a coloured surface. Because the coating contains no solvents, it has largely replaced solventbased liquid coatings. Where installations are visible, cable trays and fittings can be finished in a coating that matches the surrounding décor.

Thermoplastic coating

An option for corrosive environments. Thermoplastic coating is a thermal process in which a plastic powder is melted to give the component (most usually metal) a special coat. Thermoplastics are predominantly employed in aggressive environments up to and including corrosion class CX (ISO 12944-6), where they provide hardwearing, long-lasting and environment-friendly protection against, among other

things, corrosion. Because the coating process is thermal with no solvents, it has minimal impact on the environment. Thermoplastic coatings meet the requirements of the most aggressive environments, e.g. wet, humid environments and those with large temperature variations and concentrations of chemicals. Besides durability, the coatings also have high impact resistance. As the coating provides complete cover, is pore-free and strong, it is also hygienic and dirt repellent. V0 fire rating (UL94), UV resistant.

Stainless steel

Products manufactured in accordance with SS 2333/AISI 304 or SS 2348/AISI 316L are designed for use in highly aggressive environments, either indoors or outdoors, on industrial sites where there are high levels of potent airborne pollution such as in certain chemical industries, cellulose-related industries, refineries or artificial fertilizer factories, high humidity tunnels, etc. Stainless steel products are also ideal for use in environments where special hygiene requirements are in force, such as dairies, abattoirs, other food industries and pharmaceutical factories.

Stainless steel AISI 304 or AISI 316L

The deciding factor in choosing between stainless steel AISI 304 or AISI 316L is the aggressiveness of the environment in which it is to be used, and for this atmospheric chlorine content plays a significant role. Environments with a high chlorine content, coastal areas being a prime example, are aggressive and usually require the use of AISI 316L materials. When assessing the needs of factories, consideration should be given to the materials previously used to suspend equipment such as pipe tubing, and from this determine whether stainless steel AISI 304 or AISI 316L material is required.

To consider when installing Stainless Steel Cable Trays

- 1. Transport/handling:** Make sure that no iron objects come into contact with the stainless steel products.
- 2. Storing:** Never store stainless steel products close to where iron products are machined, for example close to cutting and grinding operations
- 3. Welding:** Welding during installation should be avoided where possible. If welding must be performed, make sure that only methods suitable for stainless steel are used.
- 4. Tools:** When cutting or grinding, always use cutting wheels and grinding tools which are free from iron. Do not use tools that have been previously used for cutting or grinding products containing iron. When drilling, use an HSS-drill. To maximize the useful life of the drill, employ a cooling fluid during drilling. When installing, conventional assembly tools can be used. However, when using a nut tightener, ensure that the thread is first lubricated to prevent jamming. Never mix untreated or galvanized products with stainless steel.
- 5. Measures:** If a blue annealing appears when cutting, grinding or drilling, re-move it with pickling paste, making sure that the paste is then carefully washed away with water. If selective corrosion appears it can be removed by:
 - a) Washing away with water (high-pressure if possible).
 - b) Polishing with a cleaning cloth or a fine emery paper (wet or dry) and washing with water.
 - c) Grinding with a fine-grained wheel and washing with water.
 - d) Pickling with pickling paste, making sure that the pickling paste is then carefully washed away with water.
- 6. When using pickling paste or similar products, always study the safety code for the product prior to use.**

Potential balancing

Electrical continuity and earthing

The standard EN 61537 establishes that for cable trays with electrical continuity characteristics (metal), this continuity should be guaranteed by means of an equipotential connection and one or several connections to earth in accordance with the use of the tray system.

The impedance must not exceed:

- 50 mΩ through the joint.

- 5 mΩ x metre of cable trays.(*)

(*) Currently this value is studied through document IEC/SC23A/WG12, CLC/TC213/WG-5 – 765. It will be changed to 50 mΩ x metre.

The metre length and joining systems for the different sections that Wibe Group has, as well as the joints of the different accessories supplied, comply with the electrical continuity test


established in the aforementioned standard, guaranteeing the impedance established. To guarantee these impedance values tightening torque values of no less than 5 Nm are recommended, always using the joints recommended for each tray type, and taking sizes into account. Ensure that all connections are well fixed and proper values are matching according to local legislation

To guarantee a safe installation, Wibe Group recommends a proper earthing of all the elements that make up the system (sections and accessories), using the accessories designed specifically for this purpose.

WIBE GROUP RECOMMENDS NOT TO USE THE TRAY AS EARTH OR NEUTRAL CONDUCTORS. Wibe Group IS NOT RESPONSIBLE OF ANY DAMAGE IF YOU USE ACCESSORIES FROM OTHER MANUFACTURERS.

Cable trays

Installed with Screw set W38P
Tightening torque 2 Nm

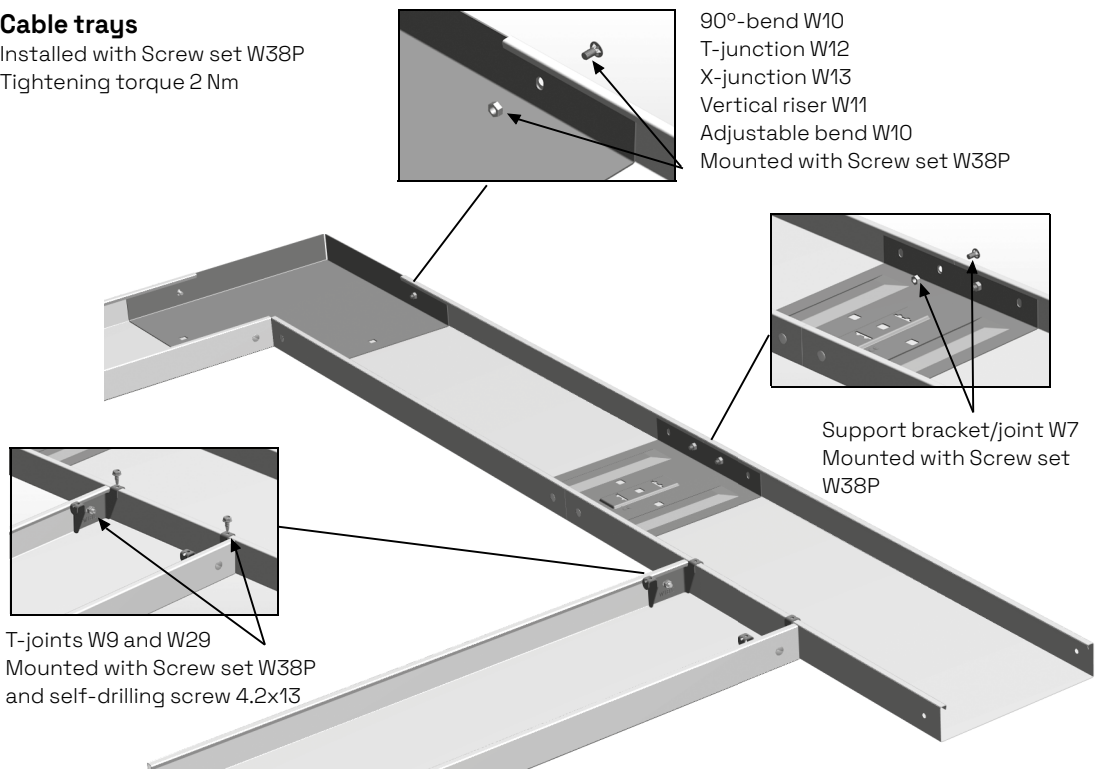

Product	Ohm/m
Cable Tray W1-200, white, with Joint W7, white + Screw set W38P, white	0,0026
Cable Tray W1-200, pre-galv, with Joint W7, pre-galv + Screw set W38P	0,00114
Cable Tray W1-200, pre-galv, with Joint W7, pre-galv + blind rivet	0,00118
Cable Tray W1-200, white, with Joint W7, pre-galv + Screw set W38P, white	0,003
Cable Tray W1-200, white, with Joint W7, pre-galv + blind rivet. (Paint taken away at the blind rivet)	0,00370

Electro-magnetic compatibility EMC

Electromagnetic Compatibility


Wibe Group has performed measurements at EMC Services in Gothenburg regarding EMC requirements, report RE-10273-17181. The results show that the shielding performance of both incoming and emitted fields is good concerning

Wibe cable trays.


When correctly installed Wibe cable trays products work as a protective earth structure.

This means that Wibe Group products can be used to achieve good engineering practice in accordance with the EMC directive 2004/108/EG.

Recommended installation examples

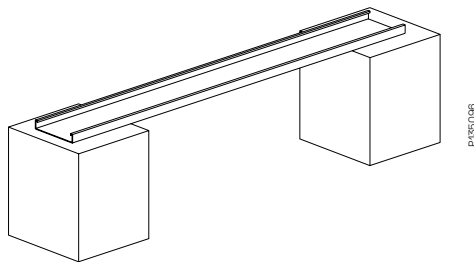


Metal against metal connection
- the ultimate installation

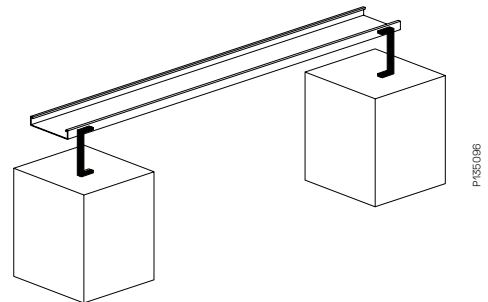


Short double connection
- realistic installation

Not recommended installation examples

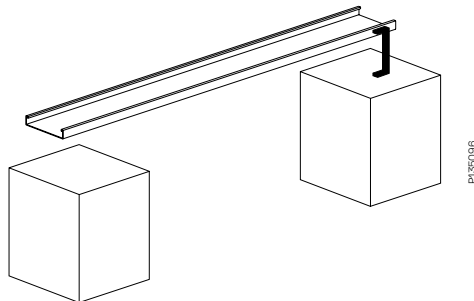

Single connection
- poor installation

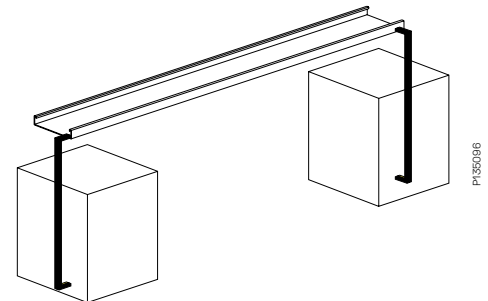


Long double connection
- in best case EMC neutral

Installation regulations

Minimum separation distance (mm), figure A


Recommended cable management



Not recommended



Recommended cable management on common cable tray



The cables should be fixed to the tray or bundled

No fixing or bundling needed.

- Power cables
- Data cables
- Control cables
- Sensitive cables like instrumentation cables
- A Separation distance

Installation of cable tray

Full design data is given according to EN 61537 in the Range part in this catalogue showing all maximum and recommended loadings. Graphs are given in this catalogue to show the deflection against loading for various support distances. Any support system which is supported at intervals and loaded will deflect between the support intervals. Test model type 1 is used for all cable tray ranges.

Installation recommendations for cable trays

The cable trays should be installed in such a way that, as often as possible, the cables can be laid directly in place rather than being pulled through. Trays for current carrying cables along the ceiling should be installed in such a way that the distance from the top of the tray to the ceiling is not less than 300 mm. The free vertical distance between parallel trays shall be at least 200 mm. Trays near walls should be installed with a minimum free distance of 50 mm to the wall, so that cables can pass between the trays and the wall. Trays along partition walls should be installed with a minimum free distance of 100 mm to the wall. Sharp edges and screw ends on trays should be removed before the cables can be installed. Expansion bolts for the installation of brackets/fixings should be installed with such a distance between them, that the designated load for trays will not be exceeded. When selecting the distance between cantilever arms or brackets/fixings, the bearing strength and designated load of the trays must be taken into consideration.

Standards and Quality



Wibe Cable tray system meets the following standards:

IEC 61537
NEMA VE 1/CSA 22.2

Tests and Certificates

Wibe cable tray is tested according to Underwriters Laboratories, UL E212854.

Wibe cable tray is approved by Det Norske Veritas (DNV) for offshore and ship-yard use Certificate no TAE00000MN.

Test made by

UL, USA & Canada

DNV, Norway

Management system - Quality and Environment

Wibe Group has a third-party certified management system for quality and environment in accordance with OHSASISO 50001:2011, ISO 45001:2018, ISO 9001:2015 and ISO 14001:2015.


CE-marking of products


The CE-marking of products is placed on the product or on the packing according to "Declaration of Conformity" (DOC), applicable to Wibe Group Cable Support System.

Low voltage directive 2014/35/EU

Wibe Group fulfills the demands according to harmonized standard EN 61537.

Installation summary

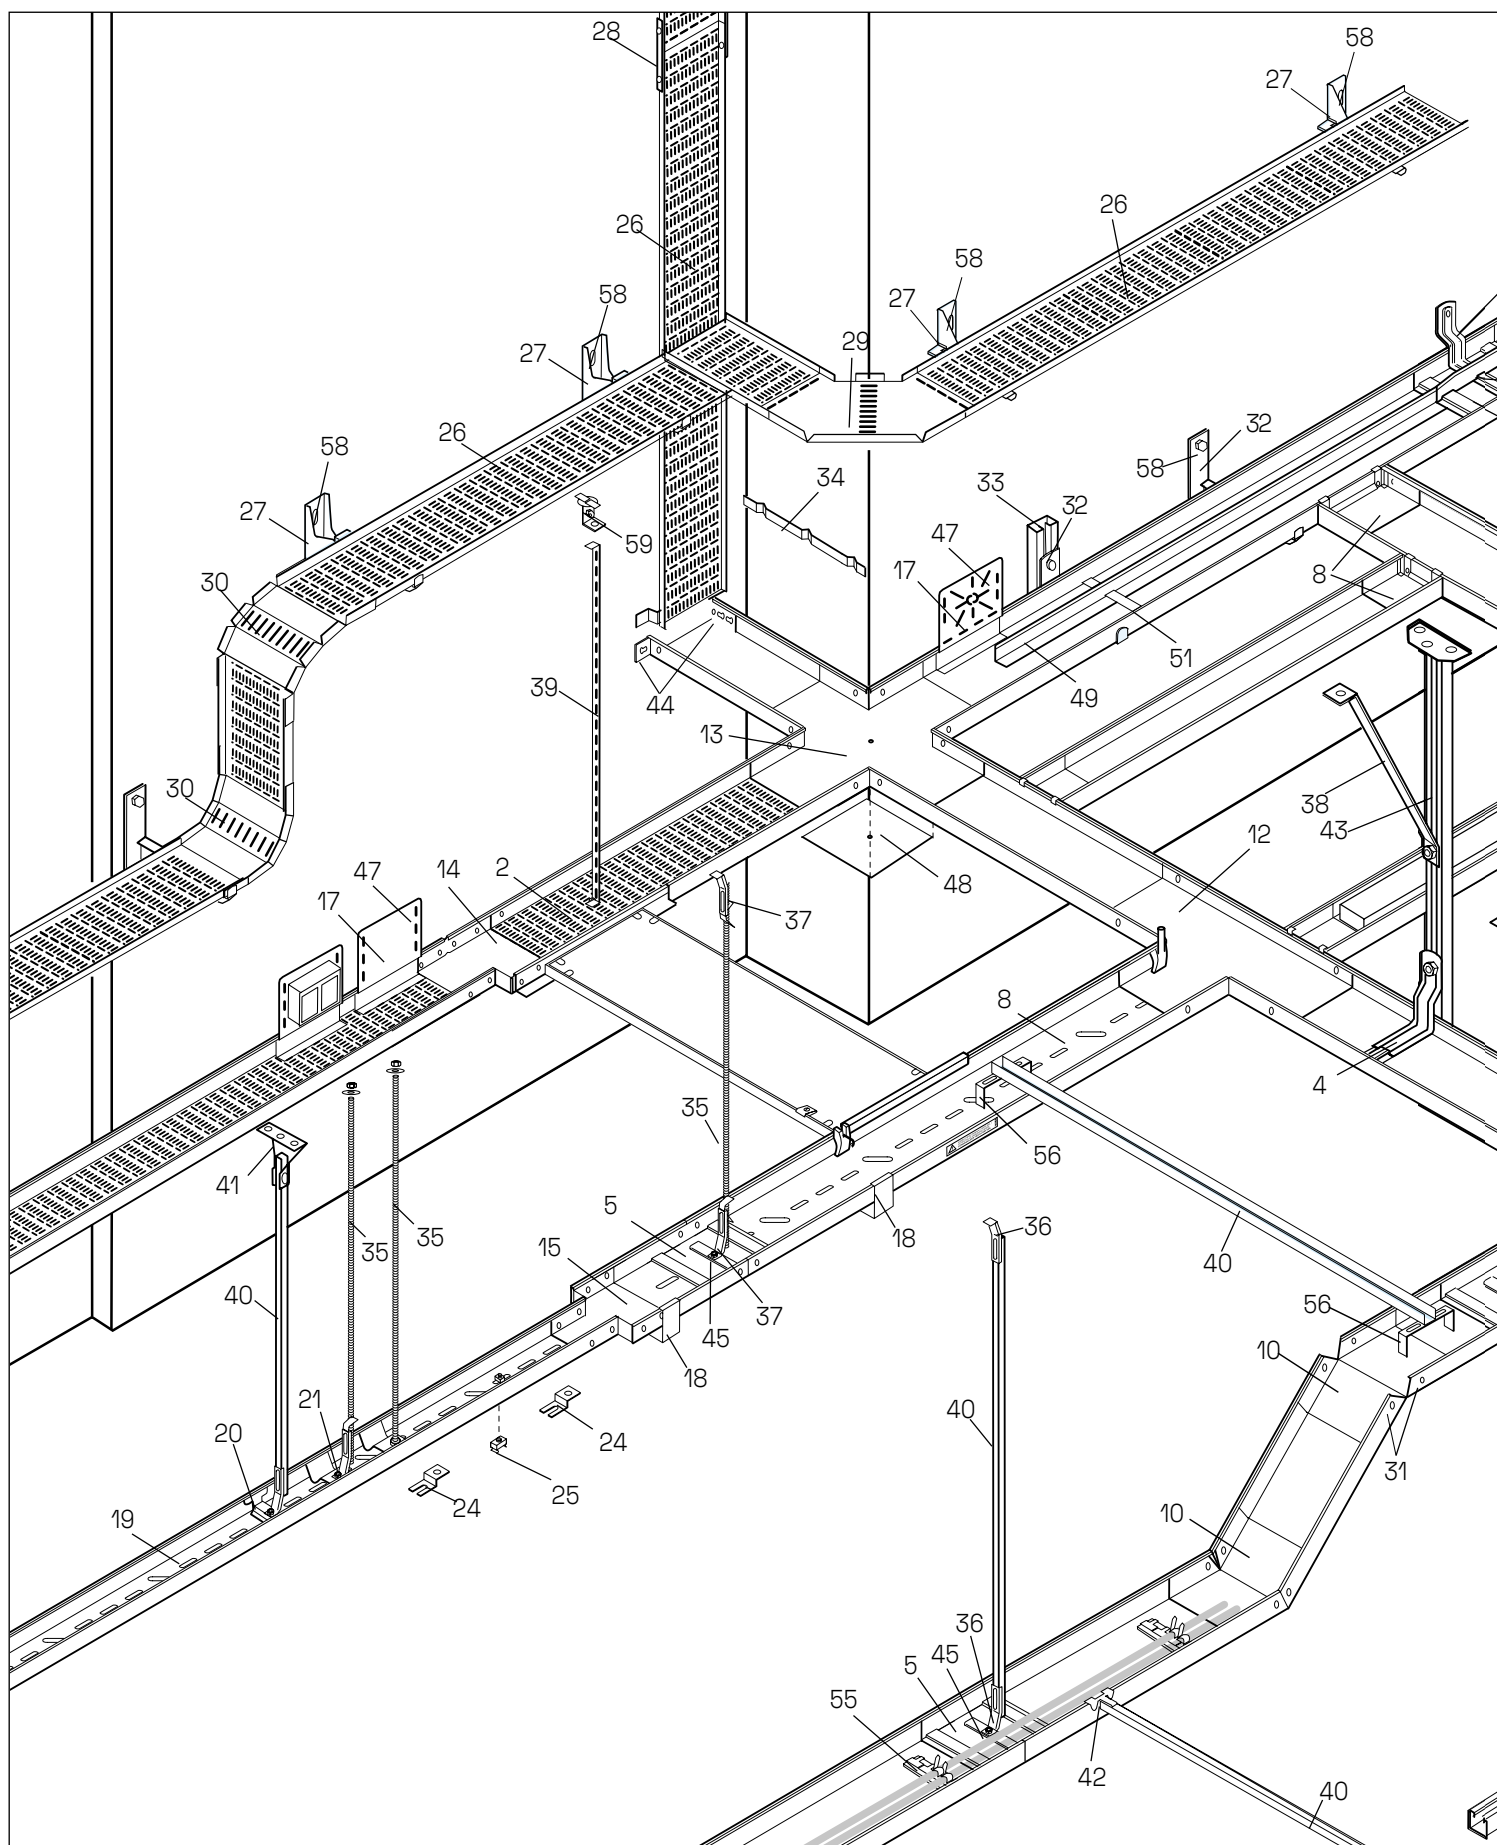


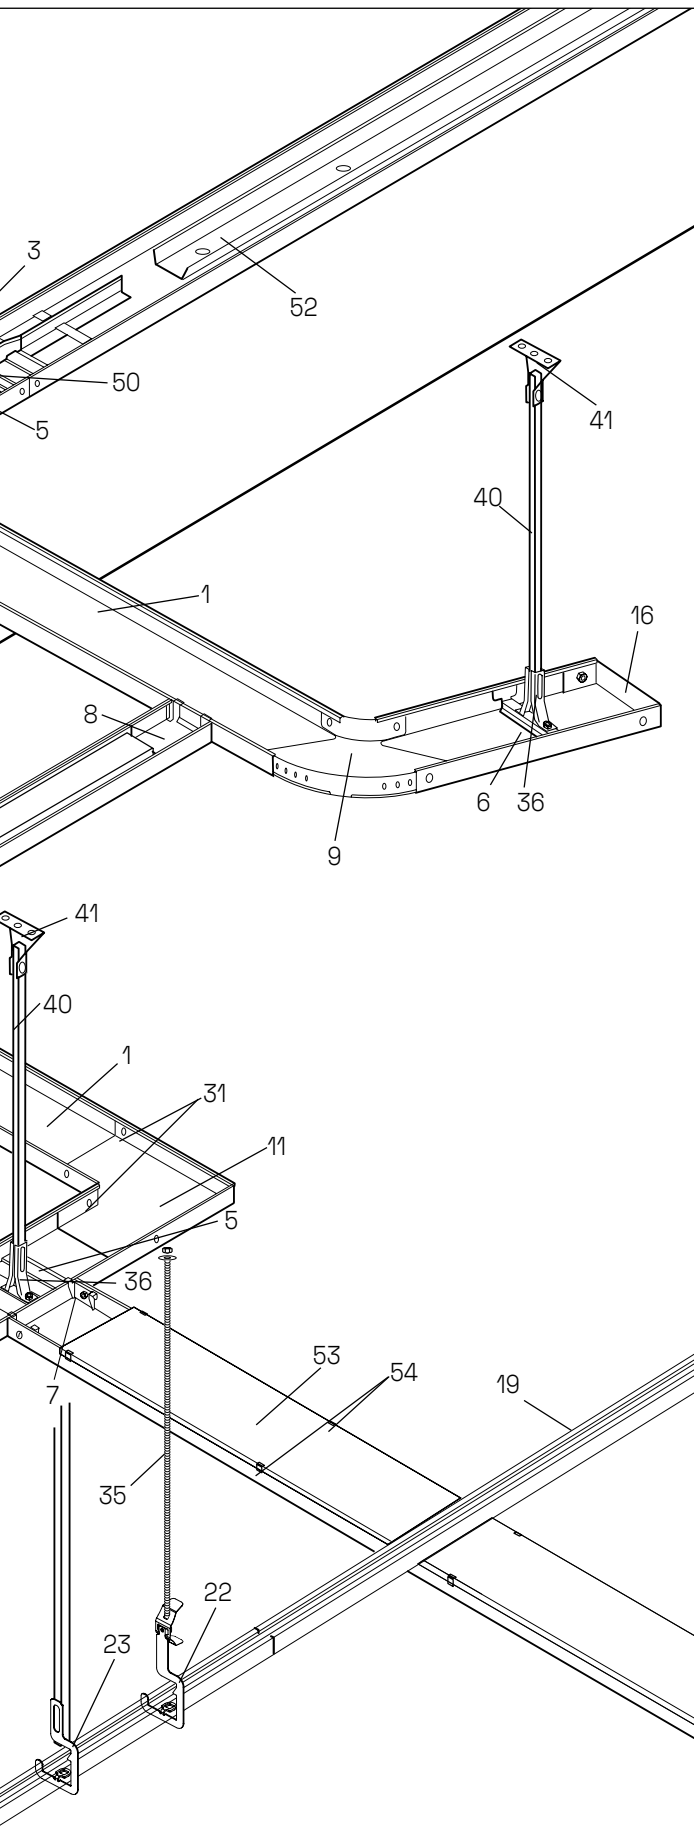

Components

- 1 Cable tray W1/40
- 2 Cable tray W3/40
- 3 Cable tray system W1/60, W3/60 209-231
- 4 Internal cantilever arm W17/40167
- 5 Adjustable cantilever arm W1840 168
- 6 Support bracket/joint W7/40
- 7 Support bracket W1940
- 8 T-joint W9/40
- 9 T-joint W29/40
- 10 Adjustable bend W10/40
- 11 Vertical riser W11/40
- 12 90° bend W10/40
- 13 T-junction W12/40
- 14 X-junction W13/40
- 15 Reducer W28
- 16 Reducer W28
- 17 End cover W45/40
- 18 Junction box plate W24/40
- 19 Luminaire bracket W25/40
- 20 Lighting trunking W70
- 21 Support bracket W20
- 22 Support bracket W20A
- 23 Pendant bracket W80
- 24 Pendant bracket W81
- 25 Luminaire bracket W35
- 26 Luminaire bracket W55
- 27 Installation tray W4
- 28 Cantilever arm 50i, 81
- 29 Joint W2
- 30 90° bend W4
- 31 Vertical riser W4
- 32 Screw set W38P C4
- 33 Cantilever arm 50
- 34 Mounting rail 40
- 35 Mounting rail WMS15, WMS25
- 36 Threaded rod W76 M6, M8, M10
- 37 Pendant attachment W21
- 38 Tube pendant attachment W73
- 39 Pendant bar 1
- 40 Pendant strip W33
- 41 Pendant rail W32
- 42 Ceiling attachment W31
- 43 Locking clamp W77
- 44 Vertical piece 2F
- 45 Angle bracket W8
- 46 Screw set W36/W36C
- 47 Earth clamp W79
- 48 Cover plate W16
- 49 Dividing strip 39
- 50 Insert piece W39
- 51 Support band W6
- 52 Tele-conduit 36
- 53 Cover W5
- 54 Cover clamp W62
- 55 Strip fixing W44
- 56 Luminaire bracket W50
- 58 Expansion bolts
- 59 Fixings-Ogebe



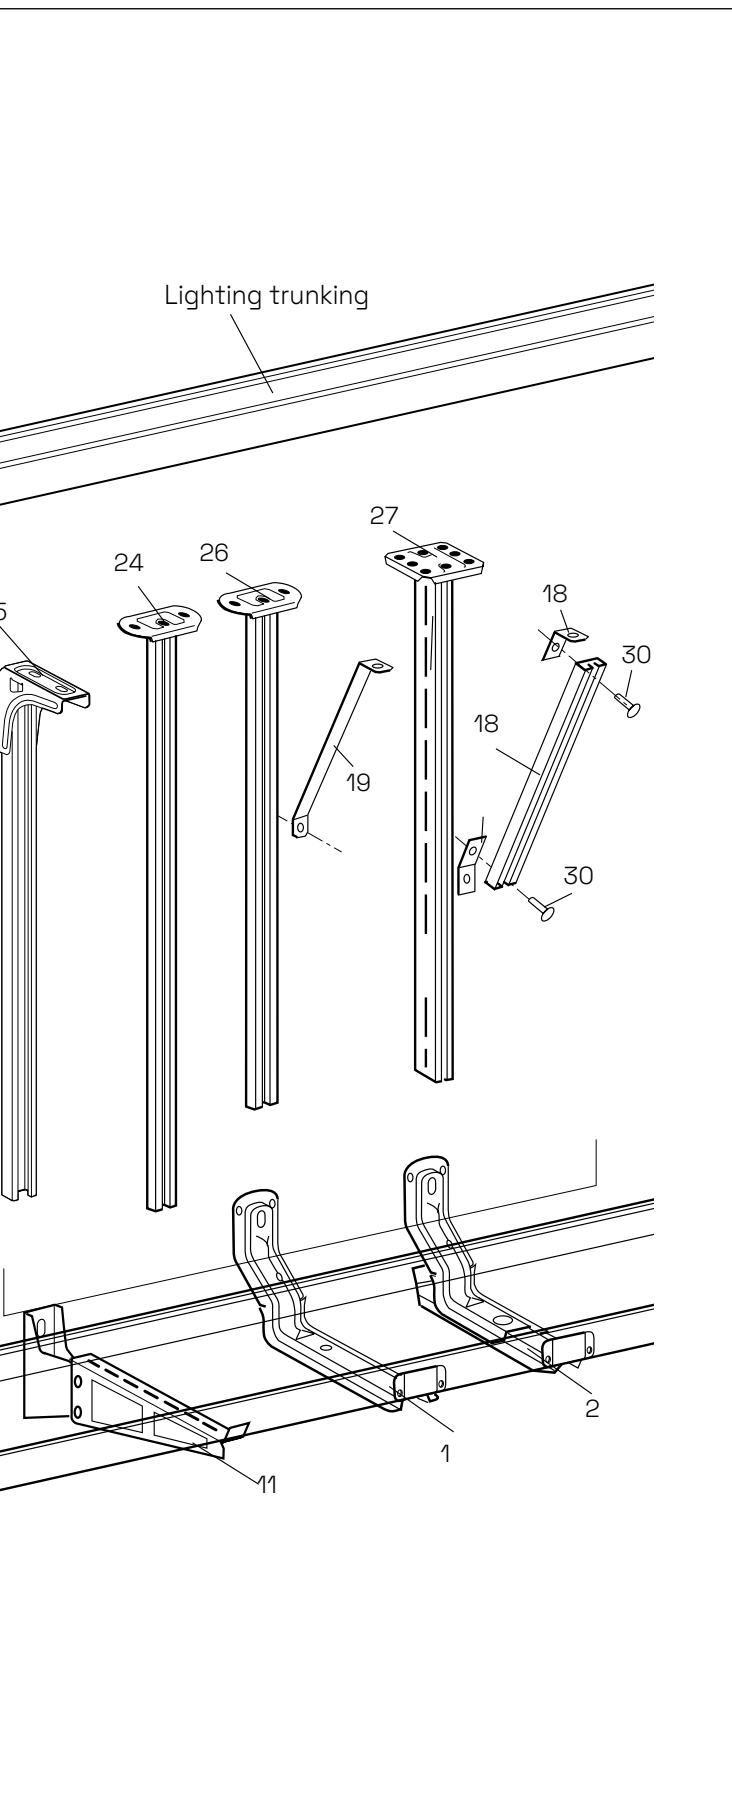

Components

- 1** Internal cantilever arm W17/40
- 2** Adjustable cantilever arm W1840
- 3** Support bracket/joint W7/40
- 4** Support bracket W1940
- 5** Support bracket W20-70
- 6** Support bracket W20-100
- 7** Support bracket W20A-70
- 8** Support bracket W20A-100
- 9** Pendant bracket W80
- 10** Pendant bracket W81
- 11** Cantilever arm 50i
- 13** Threaded rod W76 M6, M8, M10
- 14** Pendant attachment W21
- 15** Tube pendant attachment W73
- 16** Pendant/Fixing rail 24/34
- 17** Ceiling bracket 5
- 18** Bracket 60/40
- 19** Pendant bar 1
- 20** Pendant strip W33
- 21** Pendant rail W32
- 22** Ceiling attachment W31
- 24** Vertical piece 2
- 25** Vertical piece 2Fi
- 26** Vertical piece 2F
- 27** Vertical piece 20
- 28** Angle bracket W8
- 29** Angle bracket W8S
- 30** Screw set 22Sa
- 31** CLX³ Pendant 24/48
- 32** CLX³ Rail 24/48
- 33** CLX³ Adjustable ceiling plate
- 34** CLX³ Central suspension bracket, cable tray H40
- 35** CLX³ Central suspension adapter

Steel cable trays

Pre-galvanized - Corrosion class C2

Cable trays, unperforated

Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Cable tray W1					
Unperforated cable tray for indoor applications in dry environments. System height 40 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Material: Steel, pre-galvanized.					
W1/40-70	40/70/2000		95	7321677132515	713251
	40/70/3000		95	7321677208227	720822
W1/40-100	40/100/2000		115	7321677132522	713252
	40/100/3000		115	7321677209842	720984
W1/40-200	40/200/2000		170	7321677132546	713254
	40/200/3000		170	7321677209859	720985
W1/40-300	40/300/2000		400	7321677132560	713256
	40/300/3000		400	7321677266647	726664
W1/40-400	40/400/2000		500	7321677132577	713257
	40/400/3000		500	7321677266654	726665
W1/40-500	40/500/2000		710	7321677132584	713258
	40/500/3000		710	7321677266661	726666
W1/40-600	40/600/2000		825	7321677232192	723219
	40/600/3000		825	7321677266678	726667
W1/40-500 FS	40/500/2000		715	7321677868315	786831
W1/40-600 FS	40/600/2000		830	7321677868322	786832
Unperforated cable tray for indoor applications in dry environments. System height 60 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Material: Steel, pre-galvanized.					
W1/60-70	60/70/2000		165	7321677819997	781999
W1/60-100	60/100/2000		185	7321677820009	782000
W1/60-200	60/200/2000		335	7321677820016	782001
W1/60-300	60/300/2000		440	7321677239740	723974
W1/60-400	60/400/2000		540	7321677239757	723975
W1/60-500	60/500/2000		755	7321677239764	723976
W1/60-600	60/600/2000		870	7321677239771	723977
W1/60-500 FS	60/500/2000		760	7321677820467	782046
W1/60-600 FS	60/600/2000		875	7321677820474	782047

PTCSU-0002



PTCSU-0002



Steel cable trays

Pre-galvanized - Corrosion class C2

Cable trays, perforated

Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Cable tray W3					
Perforated cable tray for indoor applications in dry environments. System height 40 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Oval holes along the lateral side of the tray can be used for mounting of accessories. Material: Steel, pre-galvanized.					
W3/40-50	40/50/3000		103	7321677353880	735388
W3/40-70	40/70/3000		120	7321677353897	735389
W3/40-100	40/100/3000		136	7321677353903	735390
W3/40-150	40/150/3000		170	7321677353910	735391
W3/40-200	40/200/3000		196	7321677353927	735392
W3/40-300	40/300/3000		316	7321677353934	735393
W3/40-400	40/400/3000		390	7321677353941	735394
W3/40-500	40/500/3000		590	7321677353958	735395
W3/40-600	40/600/3000		683	7321677353965	735396
Perforated cable tray for indoor applications in dry environments. System height 60 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Oval holes along the lateral side of the tray can be used for mounting of accessories. Material: Sheet steel, pre-galvanized.					
W3/60-70	60/70/3000		150	7321677822027	782202
W3/60-100	60/100/3000		180	7321677822034	782203
W3/60-150	60/150/3000		200	7321677822041	782204
W3/60-200	60/200/3000		240	7321677822058	782205
W3/60-300	60/300/3000		337	7321677822065	782206
W3/60-400	60/400/3000		440	7321677822072	782207
Installation tray W4					
Perforated installation tray for indoor applications in dry environments. To be used when leading cables down from a cable ladder to machine cabinets, etc. Provided with holes Ø 3.5 mm in the bottom segment of the tray for the clamping of cables with plate screws. Material: Steel, pre-galvanized.					
W4-50	15/50/1960		57	7321677366033	736603
	15/50/3000		57	7321677359882	735988
W4-75	15/75/1960		76	7321677366040	736604
	15/75/3000		76	7321677359899	735989
W4-100	15/100/1960		93	7321677366057	736605
	15/100/3000		93	7321677359905	735990
W4-150	15/150/1960		125	7321677366064	736606
	15/150/3000		125	7321677359912	735991
W4-200	15/200/1960		195	7321677366071	736607
	15/200/3000		195	7321677359929	735992
W4-250	15/250/1960		228	7321677366088	736608
	15/250/3000		228	7321677359936	735993
W4-300	15/300/1960		238	7321677366095	736609
W4-400	15/400/1960		313	7321677366101	736610

PTCSU-0018



PTCSU-0018



QDA735992-bis



Steel cable trays

Pre-galvanized - Corrosion class C2

Lighting trunking

Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Lighting trunking W70-50, -70, -100, -200					
Cable tray with bottom perforation for indoor applications in dry environments. System height 40 mm, length 3000 mm. Oval holes 9x5.8 mm on the lateral sides of the tray end can be used for fixation of joints. The oval hole pattern at the base of the tray can be used for mounting of lighting fixtures. On every 500 mm an oval hole is placed to easily guide fast connectors into the tray. Material: Steel, pre-galvanized.					
W70-50	40/50/3000		242	3606480756092	CSU795216
W70-70	40/70/3000		274	3606480410383	CSU794123
W70-100	40/100/3000		323	3606480410345	CSU794124
W70-200	40/200/3000		487	3606480410369	CSU794125

PTCSU-0019



P-351002

Covers

			Weight kg/100 pcs		
Cover W5					
Cover to be used to protect the cables inside the cable tray against damages, dust, liquids, UV-influence, etc. Material: Sheet steel, pre-galvanized.					
W5-70	10/71/2000		100	7321677322145	732214
W5-100	10/101/2000		140	7321677322152	732215
W5-150	10/151/2000		190	7321677322169	732216
W5-200	10/201/2000		250	7321677322176	732217
W5-300	10/301/2000		360	7321677322183	732218
W5-400	10/401/2000		680	7321677322190	732219
W5-500	10/501/2000		840	7321677322206	732220
W5-600	10/601/2000		700	7321677322213	732221
Cover clamp W62					
Cover clamp to be used for the fixing of covers on cable trays W1/W3 as well as on lighting trunking W70. Material: Stainless steel 304.					
W62	-/15/10.5		0.8	7321677301867	730186

P40357



P46808



Dividers

Dividing strip 39					
Dividing strip to be used to separate power and data communication cables inside a W1/W3 cable tray or W70 lighting trunking. Mounted with Support band 6. Material: Steel, pre-galvanized.					
39/24	24/24/1760		46	7321677188352	718835
39/55	55/24/1750		73	7321677257850	725785
Insert piece W39					
Insert piece to be used to join Dividing strips 39/24 in cable tray W1/W3 and lighting trunking W70/71. The Insert piece can be positioned on Support bracket/joint W7/40 to ensure a continuous separation of cables inside the cable tray. Material: PP, natural coloured.					
W39	37/-/330		3	7321677168248	716824
Insert piece W39/55					
Insert piece to be used to join Dividing strips 39/55 in Cable trays W1/60 or W3/60. The insert piece can be positioned on Support bracket/joint W7/60 to ensure a continuous separation of cables inside the cable tray. Material: Sheet steel, pre-galvanized.					
W39/55	54/4.4/400		19	7321677822997	782299

P40356



P40044



782299



Dividers


Support band W6					
Support band to be placed inside cable trays to fix the lateral position of one or several Dividing strips W39. The holes in the support band and the locking pins in Dividing strip W39 enable an adjustment of the lateral positioning of the dividing strip with an interval of 25 mm. Material: Sheet steel, pre-galvanized.					
W6-70	-/18/67		1.0	7321677188284	718828
W6-100	-/18/97		1.4	7321677188291	718829
W6-200	-/18/197		2.8	7321677188307	718830
W6-300	-/18/297		4.3	7321677188314	718831
W6-400	-/18/397		5.7	7321677188321	718832
W6-500	-/18/497		7.2	7321677188338	718833
W6-600	-/18/597		8.6	7321677188345	718834

PTCSU-0020



Steel cable trays

Pre-galvanized - Corrosion class C2

Joints						
	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Support bracket/joint W7					
 782212 40-50	To be used as a support bracket or joint for cable tray W1/40, W3/40 and for lighting trunking W70. When joining cable tray W1/40 FS (reinforced), side joint W49/40 must be used. Material: Sheet steel, pre-galvanized.					
	W7/40-50	38/48/200		14	7321677345540	734554
 PTCSU-0006 40-70, 100	W7/40-70	38/68/200		16	7321677208258	720825
	W7/40-100	38/98/200		25	7321677170210	717021
 782212 40-150	W7/40-150	38/148/200		35	7321677345557	734555
	W7/40-200	38/198/200		43	7321677170227	717022
 PTCSU-0006 40-200, 300, 400	W7/40-300	38/297/300		110	7321677170234	717023
	W7/40-400	38/397/300		140	7321677170241	717024
 782212 40-500, 600	W7/40-500	38/498/300		170	7321677209903	720990
	W7/40-600	38/598/300		200	7321677231805	723180
To be used as a support bracket or joint for cable tray W1/60, W3/60. When joining cable tray W1/60 FS (reinforced), side joint W49/60 must be used. Material: Sheet steel, pre-galvanized.						
 PTCSU-0006 60-70, 100	W7/60-70	58/68/152		22	7321677822096	782209
	W7/60-100	58/98/200		33	7321677184453	718445
 782212 60-150	W7/60-150	58/148/200		41	7321677822102	782210
	W7/60-200	58/198/200		49	7321677184460	718446
 PTCSU-0006 60-200, 300, 400	W7/60-300	58/297/300		122	7321677184477	718447
	W7/60-400	58/397/300		152	7321677184484	718448
 782212 60-500, 600	W7/60-500	58/498/300		180	7321677822119	782211
	W7/60-600	58/598/300		210	7321677822126	782212
Side joint W49						
 PTCSU-0021	Side joint to be used for straight joining of cable tray W1/40 and W3/40. Material: Sheet steel, pre-galvanized.					
	W49/40	37.5/-/300		17	7321677868353	786837
	W49/60	58/-/300		27	7321677822676	782267
Flexible coupler W3-40						
 PTCSU-0022	Side joint to be used for straight joining of cable tray W3/40 and can also be used to create T-junctions, X-junctions, reducers (left, right and straight), horizontal bends, vertical risers and direct mounting suspension strips. Material: Sheet steel, zinc+ treatment.					
	W3/40	36/2/300		12	3606480788987	CSU795136

Steel cable trays

Pre-galvanized - Corrosion class C2

Joints

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Joint W2					
Side joint to be used for straight joining of installation tray W4. Material: Sheet steel, pre-galvanized.					
W2	15/25/200		8	7321677885725	788572
T-joint W9					
T-joint to be used to construct T-sections or X-sections. Also used for oblique branches. The ref. number includes two pieces of T-joints and Screw set W38P. Material: Sheet steel, pre-galvanized.					
W9/40	40/72.5/20		6	7321677182053	718205
W9/60	60/72.5/20		5	7321677822171	782217
T-joint W29					
T-joint to be used to construct T-junctions or X-junctions. Easy push-in assembly. Locks into the tray via locking flap. To be suspended over the lateral side of the tray and locked in a suitable way. Material: Sheet steel, pre-galvanized.					
W29/40-70	38/67/68		8	7321677909841	790984
W29/40-100	38/67/98		12	7321677909858	790985
W29/40-200	38/67/198		21	7321677909865	790986
W29/40-300	38/67/301		30	7321677909872	790987
W29/40-400	38/67/401		40	7321677909889	790988
W29/40-500	38/67/501		50	7321677909896	790989
W29/40-600	38/67/601		59	7321677909902	790990
T-joint to be used to construct T-junctions or X-junctions. Easy push-in assembly. Locks into the tray via locking flap. To be suspended over the lateral side of the tray and locked in a suitable way. Material: Sheet steel, pre-galvanized.					
W29/60-70	58/67/68		22	7321677831784	783178
W29/60-100	58/67/98		27	7321677831791	783179
W29/60-200	58/67/198		37	7321677831807	783180
W29/60-300	58/67/298		47	7321677831814	783181
W29/60-400	58/67/398		57	7321677831821	783182
W29/60-500	58/67/498		67	7321677831838	783183
W29/60-600	58/67/598		77	7321677831845	783184

PTCSU-0023



718205



782217



790988



783180



Steel cable trays

Pre-galvanized - Corrosion class C2

Bends

Steel cable trays

Pre-galvanized - Corrosion class C2

Junctions

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
T-junction W12						
P15354	T-junction to be used for 90° horizontal junction of cable trays W1/40 and W3/40. Push-in assembly. Material: Sheet steel, pre-galvanized.					
	W12/40-50 (flat)	-/185/248		19.6	3606480994975	CSU795383
777910	W12/40-70	38/267/167		49	7321677179084	717908
	W12/40-100	38/297/197		64	7321677179091	717909
	W12/40-150	38/347/247		92	7321677334858	733485
	W12/40-200	38/397/297		128	7321677179107	717910
	W12/40-300	38/497/397		212	7321677179114	717911
	W12/40-400	38/597/497		314	7321677179121	717912
	W12/40-500	38/697/597		438	7321677211869	721186
	W12/40-600	38/797/697		580	7321677231980	723198
782055	T-junction to be used for 90° horizontal junction of cable trays W1/60 and W3/60. Push-in assembly. Material: Sheet steel, pre-galvanized.					
	W12/60-70	58/267/167		54	7321677820528	782052
	W12/60-100	58/297/197		70	7321677820535	782053
	W12/60-150	58/347/247		99	7321677820542	782054
	W12/60-200	58/397/297		133	7321677820559	782055
	W12/60-300	58/497/397		217	7321677820566	782056
	W12/60-400	58/597/497		320	7321677820573	782057
	W12/60-500	58/697/597		443	7321677820580	782058
	W12/60-600	58/797/697		585	7321677820597	782059
	W12/60-500 FS	58/697/597		337	7321677824601	782460
	W12/60-600 FS	58/797/697		454	7321677824618	782461
X-junction W13						
P15356	X-junction to be used for 90° horizontal junction of cable trays W1/40 and W3/40. Push-in assembly. Material: Sheet steel, pre-galvanized.					
	W13/40-50 (flat)	-/248/248		23.3	3606480995019	CSU795387
777916	W13/40-70	38/267/267		64	7321677179138	717913
	W13/40-100	38/297/297		80	7321677179145	717914
	W13/40-200	38/397/397		150	7321677179152	717915
	W13/40-300	38/497/497		240	7321677179169	717916
	W13/40-400	38/597/597		350	7321677179176	717917
	W13/40-500	38/697/697		480	7321677211883	721188
	W13/40-600	38/797/797		630	7321677232000	723200
782098	X-junction to be used for 90° horizontal junction of cable trays W1/60 and W3/60. Push-in assembly. Material: Sheet steel, pre-galvanized.					
	W13/60-70	58/268/268		62	7321677820955	782095
	W13/60-100	58/298/298		78	7321677820962	782096
	W13/60-150	58/348/348		110	7321677820979	782097
	W13/60-200	58/398/398		146	7321677820986	782098
	W13/60-300	58/498/498		234	7321677820993	782099
	W13/60-400	58/598/598		342	7321677821006	782100
	W13/60-500	58/698/698		469	7321677821013	782101
	W13/60-600	58/798/798		616	7321677821020	782102
	W13/60-500 FS	58/698/698		328	7321677824625	782462
	W13/60-600 FS	58/798/798		441	7321677824632	782463
Cover plate W16						
ODA76038	Cover plate to be used to level out the differences in level between cable tray and junctions, such as 90° bends, T- and X-junctions. To be mounted under the junctions. Material: Sheet steel, pre-galvanized.					
	W16-70	1.5/70/70		6	7321677180363	718036
	W16-100	1.5/100/100		12	7321677180370	718037
	W16-200	1.5/200/200		48	7321677180387	718038
	W16-300	1.5/300/300		108	7321677180394	718039
	W16-400	1.5/400/400		192	7321677180400	718040

Steel cable trays

Pre-galvanized - Corrosion class C2

Vertical risers

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Vertical riser W11					
Vertical riser to be used as internal or external riser for cable tray W1/40 and W3/40. The riser is delivered flat and can be bent to the desired angle up to 90°. Push-in assembly. Material: Sheet steel, pre-galvanized.					
W11/40-50	-/48/150		8	7321677334988	733498
W11/40-70	-/68/150		10	7321677232260	723226
W11/40-100	-/98/150		12	7321677232277	723227
W11/40-150	-/148/150		17	7321677334995	733499
W11/40-200	-/198/200		28	7321677232284	723228
W11/40-300	-/298/200		39	7321677232291	723229
W11/40-400	-/398/200		50	7321677232307	723230
W11/40-500	-/498/200		61	7321677232314	723231
W11/40-600	-/598/200		73	7321677232321	723232
Vertical riser W11/60					
Vertical riser to be used as internal or external riser for cable tray W1/60 and W3/60. The riser is delivered flat and can be bent to the desired angle up to 90°. Push-in assembly. Material: Sheet steel, pre-galvanized.					
W11/60-70	-/67/150		12	7321677822768	782276
W11/60-100	-/97/150		15	7321677822775	782277
W11/60-150	-/147/150		19	7321677822782	782278
W11/60-200	-/197/200		31	7321677822799	782279
W11/60-300	-/297/200		42	7321677822805	782280
W11/60-600	-/397/200		53	7321677822812	782281
W11/60-500	-/497/200		64	7321677822829	782282
W11/60-600	-/597/200		75	7321677822836	782283
Vertical riser W4					
Vertical riser suitable for installation tray W4. To be used as internal or external riser. The riser is delivered flat and can be bent to the desired angle up to 90°. Material: Sheet steel, pre-galvanized.					
W4-50	16/52/250		15	7321677840892	784089
W4-75	16/77/250		19	7321677840908	784090
W4-100	16/102/250		24	7321677840915	784091
W4-150	16/152/250		33	7321677840922	784092
W4-200	16/202/250		42	7321677840939	784093
W4-250	16/252/250		58	7321677840946	784094
W4-300	16/302/250		68	7321677840953	784095
W4-400	16/402/250		77	7321677840960	784096


0DA723228



782276



784093



Steel cable trays

Pre-galvanized - Corrosion class C2

Reducers

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Reducer W28/40					
Reducer for cable tray W1/W3, system height 40. To be used together with side joint W49 in side transitions. In centered transitions only two reducers W28 are necessary. Material: Sheet steel, pre-galvanized.					
W28/40-50	37.5/50/200		15	7321677935710	793571
W28/40-100	37.5/100/200		17	7321677874361	787436
W28/40-150	37.5/150/200		20	7321677935727	793572
W28/40-200	37.5/200/200		23	7321677874378	787437
W28/40-250	37.5/250/200		26	7321677935734	793573
W28/40-300	37.5/300/200		29	7321677935741	793574
W28/40-350	37.5/350/200		32	7321677935758	793575
W28/40-400	37.5/400/200		36	7321677935765	793576
W28/40-450	37.5/450/200		39	7321677935772	793577
W28/40-500	37.5/500/200		41	7321677935789	793578
Reducer W28/60					
Reducer for cable tray W1/W3, system height 60. To be used together with side joint W49 in side transitions. In centered transitions only two reducers W28 are necessary. Material: Sheet steel, pre-galvanized.					
W28/60-50	57.5/50/200		22	7321677936076	793607
W28/60-100	57.5/100/200		27	7321677874422	787442
W28/60-150	57.5/150/200		31	7321677936083	793608
W28/60-200	57.5/200/200		36	7321677874439	787443
W28/60-250	57.5/250/200		40	7321677936090	793609
W28/60-300	57.5/300/200		45	7321677936106	793610
W28/60-350	57.5/350/200		49	7321677936113	793611
W28/60-400	57.5/400/200		54	7321677936120	793612
W28/60-450	57.5/450/200		58	7321677936137	793613
W28/60-500	57.5/500/200		63	7321677936144	793614

End covers

End cover W45					
End cover to be mounted at the ends of cable trays W1/40 and W3/40 and of lighting trunking W70. Provided with oval holes 6x55 mm on the sides. Push-in assembly. Material: Sheet steel, pre-galvanized.					
W45/40-70	38/100/68		8	7321677317301	731730
W45/40-100	38/100/98		9	7321677317318	731731
W45/40-200	38/100/198		12	7321677317325	731732
W45/40-300	38/100/298		15	7321677317332	731733
W45/40-400	38/100/398		18	3303432388423	731734
W45/40-500	38/100/498		21	7321677317356	731735
W45/40-600	38/100/598		24	7321677317363	731736
End cover W45/60					
End cover to be mounted at the ends of cable trays W1/60 and W3/60. Provided with oval holes 6x55 mm on the sides. Push-in assembly. Material: Sheet steel, pre-galvanized.					
W45/60-70	58/100/68		12	7321677822928	782292
W45/60-100	58/100/98		13	7321677822935	782293
W45/60-200	58/100/198		18	7321677822942	782294
W45/60-300	58/100/298		23	7321677822959	782295
W45/60-600	58/100/398		28	7321677822966	782296
W45/60-500	58/100/498		34	7321677822973	782297
W45/60-600	58/100/598		39	7321677822980	782298

Steel cable trays

Pre-galvanized - Corrosion class C2

Box plates

	Type	Dimensions A/B/C mm	Weight kg/100 pcs	EAN code	Ref. No.
	Junction box plate W24				
	Junction box plate, with or without perforated hole pattern. To be used for the installation of junction boxes, light fittings, etc., in cable trays W1/40 and W3/40 and in lighting trunking W70. Material: Sheet steel, pre-galvanized.				
	W24/40	161/43/200	27	7321677179954	717995
	W24/40 non-perforated	161/43/200	31	7321677302475	730247
	Junction box plate W36				
	Junction box plate, with perforated hole pattern. To be used for the installation of junction boxes, light fittings, etc., in cable trays W1/60 and W3/60. Material: Sheet steel, pre-galvanized.				
	W24/60	179/43/200	34	7321677181933	718193
	Earth clamp W79				
	Earth clamp to be used when protective earthing of the junction box plate is required. Material: Steel, electro-galvanized.				
	W79	Screw M4/-/4.5	0.2	7321677166404	716640

Outlet and junction box sets

PTCSU-0029		Junction box set				
		Junction box set including junction box plate W24/40 and a pre-mounted junction box UP, IP-class IP55. Material: Sheet steel, pre-galvanized.				
		Junction box set	161/50/200	39	7321677319633	731963
		Box AP9 + Plate W24/40 PG	161/50/200	39	7321677958689	CSU796046
P32629		Outlet set				
		Outlet set including junction box plate W24/40 and a pre-mounted outlet, 2-way. Material: Sheet steel, pre-galvanized.				
		Outlet set	161/53/200	36	7321677342273	734227
		Outlet 2-W IP44 + Plate W24/40 PG	161/53/200	40	7321677958702	CSU795870

Luminaire brackets

PTCSU-0030



Luminaire bracket W25

Luminaire bracket to b used for assembly of lighting fixtures under Cable trays W1/40 and W3/40 or Lighting trunking W70. Material: Sheet steel, pre-galvanized.

W25/40-70	62/30/72	7	7321677139118	713911
W25/40-100	62/30/101	8	7321677139125	713912
W25/40-200	62/30/201	11	7321677139149	713914
W25/40-300	62/30/301	19	7321677139163	713916
W25/40-400	62/30/401	23	7321677139170	713917
W25/40-500	62/30/501	27	7321677139187	713918
W25/40-600	62/30/601	31	7321677139132	713913

PTCSU-0031



Luminaire bracket to b used for assembly of lighting fixtures under Cable trays W1/60 and W3/60. Material: Sheet steel, pre-galvanized.

W25/60-70	82/30/72	7.7	7321677822843	782284
W25/60-100	82/30/101	8.6	7321677822850	782285
W25/60-200	82/30/201	14	7321677822867	782286
W25/60-300	82/30/301	18	7321677822874	782287
W25/60-400	82/30/401	23	7321677822881	782288
W25/60-500	82/30/501	27	7321677822898	782289
W25/60-600	82/30/601	32	7321677822904	782290

Steel cable trays

Pre-galvanized - Corrosion class C2

Luminaire brackets						
	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Luminaire bracket W50					
	Luminaire bracket to be used to mount lighting fixtures between two parallel Cable trays W1/W3 or Lighting trunking W70. Dimension A (* height) is specified when ordering and is depending on the height of the lighting fixture. The weight (**) is calculated for a bracket with a height of 100 mm. Material: Sheet steel, pre-galvanized.					
PTCSU-0032	W50	* /30/250		25**	7321677205202	720520
	Luminaire bracket W35					
	Luminaire bracket to be used to mount centralized lighting fixtures under Lighting trunking W70. Material: Sheet steel, pre-galvanized.					
PTCSU-0033	W35	15/30/70		3	7321677156504	715650
	Luminaire bracket W55					
	Luminaire bracket to be used to mount lighting fixtures under Lighting trunking W70. Material: Sheet steel, pre-galvanized.					
PTCSU-0041	W55	16/12/42		8	7321677209798	720979
Integrated ceiling parts						
	Shade ledge W26					
	Shade ledge to be used as a support for ceilings mounted between cable trays with system height 40 mm. Suspended over the lateral side of the cable tray. Also suitable for Lighting trunking W70. Material: Sheet steel, pre-galvanized.					
717980	W26/40	51/41/2000		154	7321677179909	717990
	Shade ledge W26					
	Shade ledge to be used as a support for ceilings mounted between cable trays with system height 60 mm. Suspended over the lateral side of the cable tray. Material: Sheet steel, pre-galvanized.					
PTCSU-0034	W26/60	60/42/2000		185	7321677185597	718559
	Ceiling support W27					
	Integrated support channel to be used as a support for false ceilings mounted between cable trays with system height 60 mm. Suspended over the lateral side of the cable tray. Material: Sheet steel, pre-galvanized.					
PTCSU-0003	W27/60	60/25/2000		160	7321677185566	718556
	Locking clamp W77					
	Locking clamp to be used when pendant rail W32 is mounted between two parallel lighting trunking W70 or cable trays W1/ W3 for additional stability. Material: Sheet steel, pre-galvanized.					
PTCSU-0004	W77	12/40/47		1.5	7321677167975	716797

Steel cable trays

Pre-galvanized - Corrosion class C2

Screws, bolts and nuts

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Screw set W34					
	Screw set to be used for mounting of Cable tray W3 onto Cantilever arm 50, Locking clamp W77 and Angle bracket W8 onto Pendant rail W32, Junction box plate W24 onto W3 Cable tray or Lighting trunking W70, as well as for assembly of Angle bracket W8 (light fitting bracket) and for joining of W4 Installation trays. Set including screw MSCS 6x12 and nut M6MF 6. Material: Steel, electro-galvanized.					
P410/66	W34	10/10/16		0.8	7321677184736	718473
	Screw set W36					
	Screw set including bolt and nut M8 to be used for the mounting of single Pendant attachment W21 or Tube pendant attachment W73 on Support bracket/joint W7. Material: Steel, electro-galvanized.					
715646	W36	M8		1.2	7321677156467	715646
	Screw set W36C					
	Screw set including bolt with slotted screw head and nut M8. To be used for the mounting of single Pendant attachment W21 or Tube pendant attachment W73 on Support bracket/joint W7. Material: Steel, electro-galvanized.					
783500	W36C	M8		1.8	7321677835003	783500
	Screw set W37					
	Screw set including bolt MVB 8x35 and nut M6MF 8, to be used for assembly of Pendant attachment W21 and Ceiling attachment W31 with Pendant rail W32, and for the joining of Pendant rail W32. Material: Steel, electro-galvanized.					
716799	W37	M8		2.8	7321677167999	716799
	Screw set W38P C4					
	Screw set including screw and nut, to be used for the mounting of joints, bends, junctions, shade ledge W26 and integrated ceiling support channel W27. The patented screw set pierces through painted surfaces securing potential balancing. N.B. The joints must be unpainted. Material: Steel, dacromet.					
QDA735177	W38P C4	–		0.4	7321677351770	735177
	Screw W40					
	Screw (RXS ST 5.5x13-H) to be used for the locking of T-joint W29 in open junctions. Material: Steel, electro-galvanized.					
QDA72868	W40	–		0.3	7321677218684	721868
	T-bolt 26U					
	T-bolt to be used for mounting with all vertical pieces (except Vertical piece 2) and with Pendant/fixing rail 24/48. Material: Steel, hot-dip-galvanized.					
	26U M8x30	50/44/18		6.8	3606489579777	CSU795595
T-bolt single-40	26U M10x30	50/44/18		6.8	3606489579715	CSU795589
	Locking plug W41					
	Locking plug to be used for quick locking of joints, bends and branches in cable trays and lighting trunking. Material: PP+GF10.					
PTCSU-0007	W41	Ø14/10.5		0.1	7321677186457	718645

Steel cable trays

Pre-galvanized - Corrosion class C2

Threaded rods

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Threaded rod W76						
 cau08060000	Threaded rod M6 to be used for light-duty cable tray W1/W3 and lighting trunking W70 suspensions. Material: Steel, electro-galvanized.					
	W76 M6	1000/6/6		18	7321677840618	784061
	W76 M6	2000/6/6		36	7321677929344	792934
	W76 M6	3000/6/6		54	7321677929351	792935
Threaded rod M8 and M10 to be used to suspend cable tray W1/W3 and lighting trunking W70 installations. Material: Steel, electro-galvanized.						
  cau08080000 P140074	W76 M8	1000/8/8		32	7321677250790	725079
	W76 M10	2000/10/10		100	7321677167920	716792
	W76 M10	3000/10/10		150	7321677167937	716793
Joint nut M6, M8, M10						
 PTC5U-0043	Joint nut to be used to connect two lengths of threaded rods W76. Material: Steel, electro-galvanized.					
	Joint nut M6	30/11.5/10		1.2	7321677840632	784063
	Joint nut M8	40/15/13		5.0	7321677250837	725083
	Joint nut M10	40/18.5/16		7.2	7321677248063	724806
Thread lock B50						
 P140084	Thread lock M8 and M10 to be used to connect two lengths of threaded rods. Provides a quick and screw-less height adjustment of the threaded rod. Material: Steel, electro-galvanized.					
	B50/M8	10/20/35		1	7332227014564	1149456
	B50/M10	12/24/35		2	7332227014663	1149466
Flange nut M6						
 P140154	Flange nut to be used to mount support brackets and ceiling brackets onto threaded rods W76. Material: Steel, electro-galvanized.					
	Flange nut M6	M6		0.4	7321677840625	784062
Flange nut B43						
 P140154	Flange nut to be mounted onto Threaded rod W76 in order to lock it to the Support hook and the Ceiling fittings. Package of 50 pcs. Material: Steel, electro-galvanized.					
	B43/M8	17/17/8		0.4/bag	7321677888474	1149405
	B43/M10	20/20/15		0.56/bag	7332227014649	1149464
Pendant attachment W73						
 PTC5U-0001	Tube pendant attachment to be used for mounting of threaded rod W76 M6/M10 in ceiling and cable tray W1/W3 and lighting trunking W70/71. Provides a quick and screw-less height adjustment of the threaded rod. Material: Sheet steel, pre-galvanized.					
	W73 M6	135/26/56		7	7321677912056	791205
	W73 M10	135/26/56		7	7321677166343	716634

Steel cable trays

Pre-galvanized - Corrosion class C2

716474




PTCSU-0037



PTCSU-0037



PTCSU-0044



PTCSU-0038



PTCSU-0049



Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Ogebe fixings					
Ogebe fixing type E to be used for mounting in 0.7-0.9 mm sheeting or board material. Examples are hole straps, pendants, ducts, trays and piping. Material: Steel, elctro-galvanized.					
Type E	40/25/48		4.8	7321677164745	716474

Support bracket W1940					
Support bracket to be used for invisible installation of cable trays W1/40 and W3/40. Material: Sheet steel, pre-galvanized.					
W1940-100	36/65/90		11	7321677187119	718711
W1940-200	36/65/190		22	7321677344017	734401
W1940-300	36/65/289		50	7321677344024	734402
W1940-400	36/65/389		68	7321677344031	734403
W1940-500	36/65/489		91	7321677823420	782342
W1940-600	36/65/589		110	7321677823437	782343

Support bracket W1960					
Support bracket to be used for invisible installation of cable trays W1/60 and W3/60. Material: Sheet steel, pre-galvanized.					
W1960-100	56/65/89		19	7321677823321	782332
W1960-200	56/65/189		37	7321677823338	782333
W1960-300	56/65/289		58	7321677823345	782334
W1960-400	56/65/389		77	7321677823352	782335
W1960-500	56/65/489		96	7321677823369	782336
W1960-600	56/65/589		115	7321677823376	782337

Support bracket W20					
Support bracket to be used for invisible installation of ligthing trunking W70/71, width 70 and 100 mm. The support bracket is snapped firmly into the trunking. Two nuts M10 are included. Suitable for threaded rod W76 M10. Material: Sheet steel, pre-galvanized.					
W20-70	–		9	7321677209736	720973
W20-100	–		13	7321677219438	721943

Support bracket W20A					
Support bracket to be used for invisible installation of ligthing trunking W70/71, width 70 and 100 mm. The support bracket is snapped firmly into the trunking. The spring locking device facilitates easy vertical height adjustment. Suitable for threaded rod W76 M10. Material: Sheet steel, pre-galvanized.					
W20A-70	145/75/66		15	7321677209705	720970
W20A-100	148/89/90		20	7321677211807	721180

Steel cable trays

Pre-galvanized - Corrosion class C2

Cantilever arms

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Cantilever arm 50i					
	Cantilever arm to be used for mountings on walls, vertical pieces or pendant/fixing rails. Material: Steel, pre-galvanized.					
	50i-100	80/150/43		19	7321677914128	791412
	50i-200	85/250/43		29	7321677914135	791413
	50i-300	110/350/43		46	7321677914142	791414
	50i-400	115/450/44		83	7321677914159	791415
	50i/500	130/580/50		160	3606480911354	CSU795322
	50i/600	130/680/50		186	3606480911361	CSU795323
	Internal cantilever arm W17					
	Internal cantilever arm to be used for invisible mounting inside cable tray W1/40 and W3/40. Material: Sheet steel, pre-galvanized.					
	W17-100	140/55/119		16	7321677169115	716911
	W17-200	140/55/219		35	7321677169122	716912
	W17-300	165/75/319		80	7321677169139	716913
	W17-400	165/75/419		100	7321677169146	716914
	Adjustable internal cantilever arm W1840					
	Adjustable internal cantilever arm to be used for invisible mounting inside cable trays W1/40 and W3/40. Adjustability 0-25 mm (W1840-100) and 0-50 mm (W1840-200 to 600). Material: Sheet steel, pre-galvanized.					
	W1840-100	160/60/88		36	7321677183609	718360
	W1840-200	160/60/188		47	7321677183616	718361
	W1840-300	185/60/289		120	7321677835874	783587
	W1840-400	185/60/389		139	7321677835881	783588
	W1840-500	185/60/489		156	7321677835898	783589
	W1840-600	185/60/589		175	7321677835904	783590
	Adjustable internal cantilever arm W1860					
	Adjustable cantilever arm to be used for invisible mounting inside cable trays W1/60 and W3/60. Adjustability 0-25 mm (W1860-100 length) and 0-50 mm (W1860-200-600). Material: Sheet steel, pre-galvanized.					
	W1860-100	160/60/89		47	7321677823925	782392
	W1860-200	160/60/189		65	7321677823932	782393
	W1860-300	185/60/289		123	7321677823949	782394
	W1860-400	185/60/389		142	7321677823956	782395
	W1860-500	185/60/489		161	7321677823963	782396
	W1860-600	185/60/589		180	7321677823970	782397
	Pendant bracket W80					
	Pendant bracket W80 mounted under lighting trunking W70-50 and attached with screw set W36/W36C. Threaded rod W76 M6 is easily mounted in the spring clasp without bolts. Adjustable to ± 30 mm. Material: Sheet steel, pre-galvanized.					
	W80 M6	160/35/76		5.4	3606480994890	CSU795371
	Pendant bracket W81					
	Pendant bracket W81 is mounted under lighting trunking W70-50 and is attached with screw set W37. Pendant rail W32 is mounted using screw set W37. Adjustable to ± 18mm. Material: Sheet steel, hot-dip galvanized.					
	W81 M6	140/2/76		4.1	3606480994913	CSU795377
	Wire bracket W70-50					
	Wire bracket for screwless fixation, central suspension of lighting trunking w70-50. Material: Steel, hot-dip galvanized.					
	Wire bracket	70/52/58		2.2	3606480994883	CSU795370
	Back plate W30					
	Back plate to be used for wall installation of internal cantilever arms on porous walls, to reduce the surface pressure. Material: Sheet steel, pre-galvanized.					
	W30	135/3/135		42	7321677867929	786792

Steel cable trays

Pre-galvanized - Corrosion class C2

Steel cable trays

Pre-galvanized - Corrosion class C2

Pendant/Fixing rails

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Pendant rail W32					
	Pendant rail to be installed in ceilings in combination with ceiling attachment W31 or Ogebe fixing type E. Material: Sheet steel, pre-galvanized.					
PTCSU-0009	W32	3000/20/20		180	7321677167982	716798
	Pendant/Fixing rail 24/34					
	Pendant/Fixing rail to be used for the mounting of support brackets, cantilever arms, etc. Material: Sheet steel, pre-galvanized.					
	24/34	293/16/42		23	7321677253579	725357
	24/34	383/16/42		31	7321677253586	725358
	24/34	495/16/42		40	7321677253593	725359
	24/34	698/16/42		56	7321677253609	725360
	24/34	990/16/42		80	7321677253616	725361
	Pendant/Fixing rail 24/48					
	Pendant/Fixing rail for mounting of support brackets, cantilever arms, etc. Material: Steel, pre-galvanized.					
	24/48	1000/26/48		175	3606481317858	CSU795564
	24/48	2970/26/48		520	7321677317172	731717
	24/48	5940/26/48		1120	7321677317219	731721
	Pendant attachment W21					
	Pendant attachment to be used in combination with pendant rail W32, support bracket/joint W7, etc. Material: Sheet steel, pre-galvanized.					
PTCSU-0010	W21	97/50/21		12	7321677166305	716630

Pendant bars

	Pendant bar 1					
	Pendant bar to be installed in order to reduce the deflection of heavily loaded vertical pieces. Installed with T-bolt and Expansion bolt. Material: Steel, pre-galvanized.					
	1-300	315/161/40		35	7321677927272	792727
	1-500	515/166/40		53	7321677927289	792728
	1-800	815/246/40		82	7321677927296	792729

Angle brackets

	Angle bracket W8					
	Angle bracket to be mounted inside a cable tray W1/W3 for horizontal installation to the wall or vertical installation to the floor. Can also be mounted as a pendant bracket in the lighting trunking W70. Material: Sheet steel, pre-galvanized.					
PTCSU-0011	W8	80/38/45		6	7321677168217	716821
	Angle bracket W8S					
	Universal angle bracket to be used for various installations of pendant/fixing rail 24/34, support bracket, etc. Material: Sheet steel, pre-galvanized.					
PTCSU-0012	W8S	120/30/30		8	7321677280711	728071

Pendant joint

	Pendant joint 2FJ					
	Pendant joint to be used for joining pendant/fixing rails and vertical pieces. Screws M8x16 and nuts included. Material: Steel, pre-galvanized.					
PS39960	2FJ	200/18/55		46	3606480911385	CSU795325

Steel cable trays

Pre-galvanized - Corrosion class C2

Lashing wires

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Lashing wire					
	Lashing wire to be used for lashing of wires on cable ladders. Material: Stainless steel, PVC.					
P140226 	HTR-2303, white PVC	Ø1.25		1.3/100 m	7321677136865	713686
P140225 	HTR-2313, black PVC	Ø1.25		1.3/100 m	7321677136872	713687
	Lashing wire to be used for lashing of wires on cable ladders. Material: PVC.					
P140226 	HT-2304, white	Ø1.5		1.8/100 m	7321677136841	713684
P140225 	HT-2314, black	Ø1.5		1.8/100 m	7321677136858	713685

End plugs

	End plug 28C and E					
	End plug to be mounted on pendant ends to provide protection against personal injury and to make the ends of the profiles more conspicuous. Material: PP/TPE, orange.					
P140067 	28C for Vertical piece 2 and Pendant/fixing rail 24/34	25/19/46		0.5	7321677898756	789875
P140069 	28E for Vertical piece 2F and Pendant/fixing rail 24/48, Pendant Fixing rail 24/48 and CLX ³ Pendant Fixing rail 24/48.	24/30/52		0.5	7321677090211	709021

Accessories

	Strip fixing W44					
	Strip fixing to be used for easy fixation of cables in an unperforated cable tray W1/40 or W1/60. Material: PPE.					
P146804 	W44	5.5/25/96		1	7321677184699	718469
	Protection strip W48					
	Protection strip to be used to protect cables from sharp edges when cutting the cable tray W1/W3 or lighting trunking W70. Material: Plastic.					
PTCSU-0013 	W48	10/6/720		6.1	7321677872114	787211
	Repair paint					
	Anti-corrosive repair paint in a 0.4 l can for the repair of damages on pre-galvanized or hot-dip galvanized trays and accessories.					
P149450 	Anti-corrosive repair paint	–		43	7321677959310	CSU795931

Reliable, functional and flexible. CLX³ is optimized to deliver for a range of applications.



CLX³ is engineered for all commercial buildings – from modern offices, and state-of-the-art automated distribution centers, to luxurious consumer shopping facilities.

Central Wibe cable tray support



- The CLX³ support system in combination with the Wibe Cable tray is designed to effectively conceal the cables and support brackets, thereby enhancing the aesthetics of the cable routing installation.
- The system is developed to function in synergy with interior design requirements.
- The smooth and rounded design of the bracket helps prevent damage to cables.

Steel cable trays

CLX³ Click suspension - Corrosion class C2

Vertical piece/Fixing rail

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
 PTCSU-181	CLX³ pendant 24/48					
	Vertical piece/pendant to be used for ceiling suspended mounting. Perforated pattern to be used with CLX ³ cantilever arm or CLX ³ central suspension adapter. Open side can be used with T-bolt. Material: Steel, pre-galvanized.					
	CLX ³ pendant-300	295/145/53		90.6	3606489904937	CSU795632
	CLX ³ pendant-400	395/145/53		107.5	3606489904944	CSU795633
	CLX ³ pendant-500	495/145/53		124.4	3606489904951	CSU795634
	CLX ³ pendant-700	695/145/53		158.1	3606489904968	CSU795635
 PTCSU-486	CLX ³ pendant-1000	995/145/53		208.7	3606489904975	CSU795636
	CLX ³ pendant-1500	1495/145/53		294.2	3606481828323	CSU795638
	CLX³ pendant rail 24/48					
	Pendant rail to be used for direct wall mounting or for vertical piece/pendants extensions. To be connected to the vertical piece/pendant together with the pendant joint CSU795325. Perforated pattern to be used with CLX ³ cantilever arm. Open side can be used with T-bolt. Material: Steel, pre-galvanized.					
	CLX ³ rail 24/48 300	280/48/26		47.2	3606481828330	CSU795640
	CLX ³ rail 24/48 1000	980/48/26		165.1	3606481828347	CSU795641
	CLX ³ rail 24/48 3000	2980/48/26		502	3606489904982	CSU795637

Adjustable ceiling plate

	CLX³ adjustable ceiling plate					
 PTCSU-187	Adjustable ceiling plate. To be used for angular adjustment of pendant vs ceiling. Adjustment between 0-25°. Adjustable ceiling plate is to be mounted to the CLX ³ pendant. To be assembled with 4 screw set 22S (713694), need to be ordered separately. Tightening force of the screw set minimum torque 20 N.m. Material: Steel, pre-galvanized.					
	CLX ³ adjustable ceiling plate	150/100/59		49.8	3606489904999	CSU795639

Central suspensions

	CLX³ central suspension bracket, cable tray H40					
 PTCSU-95	Central suspension bracket used for mounting Wibe cable W1/W3/W70 trays height 40 on vertical pieces. Material: Steel, pre-galvanized.					
	70	152/37/66		16.5	3606489905088	CSU795653
	100	152/37/96		18	3606489905095	CSU795654
 PTCSU-97	200 *	36/76/196		26.8	3606489905156	CSU795660
	300 *	36/76/296		46	3606489905163	CSU795661
	400 *	36/76/396		65.3	3606489905170	CSU795662
	500 *	36/76/496		84.6	3606489905187	CSU795663
	600 *	36/76/596		103.9	3606489905194	CSU795664
(*) the central suspension bracket shall first be assembled together with the CLX ³ central suspension adapter (CSU795700) to be able to click in the perforation pattern on the vertical piece.						
	CLX³ central suspension adapter					
 PTCSU-211	Central suspension adapter to be first clicked to a CLX ³ central suspension bracket of choice. The adaptor fits to all types of CLX ³ central suspension brackets; ladder, tray and mesh. In a second step the adaptor with the central suspension bracket mounted is clicked in the perforation pattern in the rail or the pendant. Material: Steel, pre-galvanized.					
	CLX ³ CSB adapter	166/31/39		17.7	3606489905248	CSU795700

Steel cable trays

Pre-galvanized white - Corrosion class C2

Cable trays, unperforated

Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Cable tray W1					
Unperforated cable tray for indoor applications in dry environments. System height 40 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Material: Steel, pre-galvanized, powder-coated white.					
W1/40-70	40/70/2000		95	7321677289868	728986
	40/70/3000		95	7321677813346	781334
W1/40-100	40/100/2000		115	7321677289875	728987
	40/100/3000		115	7321677813353	781335
W1/40-200	40/200/2000		170	7321677289882	728988
	40/200/3000		170	7321677813360	781336
W1/40-300	40/300/2000		400	7321677289899	728989
	40/300/3000		400	7321677813377	781337
W1/40-400	40/400/2000		500	7321677289905	728990
	40/400/3000		500	7321677813384	781338
W1/40-500	40/500/2000		710	7321677289912	728991
	40/500/3000		710	7321677813391	781339
W1/40-600	40/600/2000		825	7321677289929	728992
	40/600/3000		825	7321677813407	781340
W1/40-500 FS	40/500/2000		715	7321677868339	786833
W1/40-600 FS	40/600/2000		830	7321677868346	786834
Unperforated cable tray for indoor applications in dry environments. System height 60 mm. Provided with holes Ø5.8 mm at the tray end to be used for fixation of joints. Material: Steel, pre-galvanized, powder-coated white.					
W1/60-70	60/70/2000		165	7321677820115	782011
W1/60-100	60/100/2000		185	7321677820122	782012
W1/60-200	60/200/2000		335	7321677820139	782013
W1/60-300	60/300/2000		440	7321677820146	782014
W1/60-400	60/400/2000		540	7321677820153	782015
W1/60-500	60/500/2000		755	7321677820160	782016
W1/60-600	60/600/2000		870	7321677820177	782017
W1/60-500 FS	60/500/2000		760	7321677820481	782048
W1/60-600 FS	60/600/2000		875	7321677820498	782049

PTCSU-0002



PTCSU-0002



Steel cable trays

Pre-galvanized white - Corrosion class C2

Cable trays, perforated

Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Cable tray W3					
Perforated cable tray for indoor applications in dry environments. System height 40 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Oval holes along the lateral side of the tray can be used for mounting of accessories. Material: Steel, pre-galvanized white.					
W3/40-50	40/50/3000		103	7321677375370	737537
W3/40-70	40/70/3000		120	7321677375387	737538
W3/40-100	40/100/3000		136	7321677375394	737539
W3/40-150	40/150/3000		170	7321677375400	737540
W3/40-200	40/200/3000		196	7321677375417	737541
W3/40-300	40/300/3000		316	7321677375424	737542
W3/40-400	40/400/3000		390	7321677375431	737543
W3/40-500	40/500/3000		590	7321677375448	737544
W3/40-600	40/600/3000		683	7321677375455	737545
Perforated cable tray for indoor applications in dry environments. System height 60 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Oval holes along the lateral side of the tray can be used for mounting of accessories. Material: Sheet steel, pre-galvanized white.					
W3/60-70	60/70/3000		150	7321677823062	782306
W3/60-100	60/100/3000		180	7321677823079	782307
W3/60-150	60/150/3000		200	7321677823086	782308
W3/60-200	60/200/3000		240	7321677823093	782309
W3/60-300	60/300/3000		337	7321677823109	782310
W3/60-400	60/400/3000		440	7321677823116	782311
Installation tray W4					
Perforated installation tray for indoor applications in dry environments. To be used when leading cables down from a cable ladder to machine cabinets, etc. Provided with holes Ø 3.5 mm in the bottom segment of the tray for the clamping of cables with plate screws. Material: Steel, pre-galvanized white.					
W4-50	15/50/1960		57	7321677366330	736633
	15/50/3000		57	7321677872275	787227
W4-75	15/75/1960		76	3303437366341	736634
	15/75/3000		76	7321677872282	787228
W4-100	15/100/1960		93	3303437366358	736635
	15/100/3000		93	7321677872299	787229
W4-150	15/150/1960		125	7321677366361	736636
	15/150/3000		125	7321677872305	787230
W4-200	15/200/1960		195	3303437366372	736637
	15/200/3000		195	7321677872312	787231
W4-250	15/250/1960		228	3303437366389	736638
	15/250/3000		228	7321677872329	787232
W4-300	15/300/1960		238	7321677366392	736639
W4-400	15/400/1960		313	7321677366408	736640

PTCSU-0018



PTCSU-0018



ODAW75592-bis



Steel cable trays

Pre-galvanized white - Corrosion class C2

Lighting trunking

Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Lighting trunking W70-50, -70, -100, -200					
Cable tray with bottom perforation for indoor applications in dry environments. System height 40 mm, length 3000 mm. Oval holes 9x5.8 mm on the lateral sides of the tray end can be used for fixation of joints. The oval hole pattern at the base of the tray can be used for mounting of lighting fixtures. On every 500 mm an oval hole is placed to easily guide fast connectors into the tray. Material: Steel, pre-galvanized white.					
W70-50	40/50/3000		254	3606480756108	CSU795217
W70-70	40/70/3000		274	3606480410390	CSU794184
W70-100	40/100/3000		323	3606480410352	CSU794185
W70-200	40/200/3000		487	3606480410376	CSU794186

PTCSU-0018



P135002

Covers

			Weight kg/100 pcs		
Cover W5					
Cover to be used to protect the cables inside the cable tray against damages, dust, liquids, UV-influence, etc. Material: Sheet steel, pre-galvanized white.					
W5-70	10/71/2000	100	7321677290154	729015	
W5-100	10/101/2000	140	7321677290161	729016	
W5-150	10/151/2000	190	7321677341344	734134	
W5-200	10/201/2000	250	7321677290178	729017	
W5-300	10/301/2000	360	7321677290185	729018	
W5-400	10/401/2000	680	7321677290192	729019	
W5-500	10/501/2000	840	7321677290208	729020	
W5-600	10/601/2000	700	7321677290215	729021	
Cover clamp W62					
Cover clamp to be used for the fixing of covers on cable trays W1/W3 as well as on lighting trunking W70. Material: Stainless steel 304.					
W62	-/15/10.5	0.8	7321677301867	730186	

P140357



P140808



Dividers

Dividing strip 39					
Dividing strip to be used to separate power and data communication cables inside a W1/W3 cable tray or W70 lighting trunking. Mounted with Support band 6. Material: Steel, pre-galvanized white.					
39/24	24/24/1750	46	7321677179503	717950	
39/55	55/24/1750	73	7321677257867	725786	
Insert piece W39					
Insert piece to be used to join Dividing strips 39/24 in cable tray W1/W3 and lighting trunking W70. The Insert piece can be positioned on Support bracket/joint W7/40 to ensure a continuous separation of cables inside the cable tray. Material: PP, natural coloured.					
W39	37/-/330	3	7321677168248	716824	
Insert piece W39/55					
Insert piece to be used to join Dividing strips 39/55 in Cable trays W1/60 or W3/60. The insert piece can be positioned on Support bracket/joint W7/60 to ensure a continuous separation of cables inside the cable tray. Material: Sheet steel, pre-galvanized white.					
W39/55	54/4.4/400	19	7321677868735	786873	

P140356



P140044



782289

Steel cable trays

Pre-galvanized white - Corrosion class C2

Dividers

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
 PTCSU-0020	Support band W6					
	Support band to be placed inside cable trays to fix the lateral position of one or several Dividing strips W39. The holes in the support band and the locking pins in Dividing strip W39 enable an adjustment of the lateral positioning of the dividing strip with an interval of 25 mm. Material: Sheet steel, pre-galvanized.					
	W6-70	-/18/67		1.0	7321677188284	718828
	W6-100	-/18/97		1.4	7321677188291	718829
	W6-200	-/18/197		2.8	7321677188307	718830
	W6-300	-/18/297		4.3	7321677188314	718831
	W6-400	-/18/397		5.7	7321677188321	718832
	W6-500	-/18/497		7.2	7321677188338	718833
	W6-600	-/18/597		8.6	7321677188345	718834

Joints

 PTCSU-0006 40-70, 100, 200, 300, 400 782212	Support bracket/joint W7					
	To be used as a support bracket or joint for cable tray W1/40, W3/40 and for lighting trunking W70. When joining cable tray W1/40 FS (reinforced), side joint W49/40 must be used. Material: Sheet steel, pre-galvanized white.					
	W7/40-70	38/68/200		16	7321677290468	729046
	W7/40-100	38/98/200		25	7321677290475	729047
	W7/40-200	38/198/200		43	7321677290482	729048
	W7/40-300	38/297/300		110	7321677290499	729049
	W7/40-400	38/397/300		140	7321677290505	729050
	W7/40-500	38/498/300		170	7321677290512	729051
 782212 40-500, 600 PTCSU-0006 60-70, 100 782212						
	To be used as a support bracket or joint for cable tray W1/60, W3/60. When joining cable tray W1/60 FS (reinforced), side joint W49/60 must be used. Material: Sheet steel, pre-galvanized white.					
	W7/60-70	58/68/152		22	7321677823185	782318
	W7/60-100	58/98/200		33	7321677823192	782319
	W7/60-150	58/148/200		41	7321677823208	782320
	W7/60-200	58/198/200		49	7321677823215	782321
	W7/60-300	58/297/300		122	7321677823222	782322
	W7/60-400	58/397/300		152	7321677823239	782323
 PTCSU-0006 60-200, 300, 400 782212 60-500, 600 PTCSU-0021						
	W7/60-500	58/498/300		180	7321677823246	782324
	W7/60-600	58/598/300		210	7321677823253	782325
	Side joint W49					
	Side joint to be used for straight joining of cable trays W1 and W3. Material: Sheet steel, pre-galvanized white.					
	W49/40	37.5/-/300		17	7321677868384	786838
	W49/60	58/-/300		27	7321677823307	782330
	Joint W2					
 PTCSU-0023	Side joint to be used for straight joining of installation tray W4. Material: Sheet steel, pre-galvanized white.					
	W2	15/25/200		8	7321677885749	788574

Steel cable trays


Pre-galvanized white - Corrosion class C2

Joints

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
 718205	T-joint W9					
	T-joint to be used to construct T-sections or X-sections. Also used for oblique branches. The ref. number includes two pieces of T-joints and Screw set W38P. Material: Sheet steel, pre-galvanized white.					
	W9/40	40/72.5/20		6	7321677290949	729094
 782217	W9/60	60/72.5/20		5	7321677822188	782218
 790886	T-joint W29					
	T-joint to be used to construct T-junctions or X-junctions. Easy push-in assembly. Locks into the tray via locking flap. To be suspended over the lateral side of the tray and locked in a suitable way. Material: Sheet steel, pre-galvanized white.					
	W29/40-70	38/67/68		8	7321677249428	724942
	W29/40-100	38/67/98		12	7321677249435	724943
	W29/40-200	38/67/198		21	7321677249442	724944
	W29/40-300	38/67/301		30	7321677249459	724945
	W29/40-400	38/67/401		40	7321677249466	724946
	W29/40-500	38/67/501		50	7321677249473	724947
	W29/40-600	38/67/601		59	7321677249480	724948
 783180	T-joint to be used to construct T-junctions or X-junctions. Easy push-in assembly. Locks into the tray via locking flap. To be suspended over the lateral side of the tray and locked in a suitable way. Material: Sheet steel, pre-galvanized white.					
	W29/60-70	58/67/68		22	7321677831852	783185
	W29/60-100	58/67/98		27	7321677831869	783186
	W29/60-200	58/67/198		37	7321677831876	783187
	W29/60-300	58/67/298		47	7321677831883	783188
	W29/60-400	58/67/398		57	7321677831890	783189
	W29/60-500	58/67/498		67	7321677831906	783190
	W29/60-600	58/67/598		77	7321677831913	783191

Steel cable trays

Pre-galvanized white - Corrosion class C2

Bends						
	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
 P45352 77905	90° bend W10					
	Horizontal 90° bend to be used for cable trays W1/40 and W3/40. Push-in assembly. Material: Sheet steel, pre-galvanized white.					
	W10/40-50 (flat)	38/183/183		14.9	3606480994944	CSU795380
	W10/40-70	38/167/167		38	7321677292011	729201
	W10/40-100	38/197/197		51	7321677291335	729133
	W10/40-200	38/297/297		108	7321677291342	729134
	W10/40-300	38/397/397		185	7321677291359	729135
	W10/40-400	38/497/497		281	7321677291366	729136
 782041	W10/40-500	38/597/597		400	7321677291373	729137
	W10/40-600	38/697/697		540	7321677291380	729138
	Horizontal 90° bend to be used for cable trays W1/60 and W3/60. Push-in assembly. Material: Sheet steel, pre-galvanized white.					
	W10/60-70	58/167/167		43	7321677824083	782408
	W10/60-100	58/197/197		55	7321677824090	782409
	W10/60-150	58/247/247		85	7321677824106	782410
	W10/60-200	58/297/297		117	7321677824113	782411
	W10/60-300	58/397/397		196	7321677824120	782412
	W10/60-400	58/497/497		295	7321677824137	782413
	W10/60-500	58/597/597		413	7321677824144	782414
	W10/60-600	58/697/697		551	7321677824151	782415
	W10/60-500 FS	58/597/597		343	7321677871889	787188
W10/60-600 FS	58/697/697		465	7321677871896	787189	
 PTCSU-0024	Adjustable bend W10S					
	Adjustable bend to be used for horizontal angling from 105° to 165° in steps of 7.5°. Push-in assembly. Material: Sheet steel, pre-galvanized white.					
	W10S/40-70	38/67/67		10	7321677291038	729103
	W10S/40-100	38/97/97		13	7321677291045	729104
	W10S/40-200	38/197/197		40	7321677291052	729105
	W10S/40-300	38/297/297		75	7321677291069	729106
	W10S/40-400	38/397/397		125	7321677291076	729107
	W10S/40-500	38/497/497		270	7321677291083	729108
W10S/40-600	38/597/597		380	7321677291090	729109	
 PTCSU-0025	Adjustable bend to be used for horizontal angling from 105° to 165° in steps of 7.5°. Push-in assembly. Material: Sheet steel, pre-galvanized white.					
	W10S/60-70	58/67/67		17	7321677824717	782471
	W10S/60-100	58/97/97		23	7321677824724	782472
	W10S/60-150	58/147/147		37	7321677824731	782473
	W10S/60-200	58/197/197		53	7321677824748	782474
	W10S/60-300	58/297/297		97	7321677824755	782475
	W10S/60-400	58/397/397		156	7321677824762	782476
	W10S/60-500	58/497/497		292	7321677824779	782477
	W10S/60-600	58/597/597		406	7321677824786	782478
	90° bend W4					
	Horizontal 90° bend to be used for cable tray W4. To be mounted on the outside of the tray and attached in the bottom segment with screw set W34. Material: Sheet steel, pre-galvanized white.					
 784077	W4-50	16/52/-		10	7321677841134	784113
	W4-75	16/77/-		15	7321677841141	784114
	W4-100	16/102/-		22	7321677841158	784115
	W4-150	16/152/-		37	7321677841165	784116
	W4-200	16/202/-		55	7321677841172	784117
	W4-250	16/252/-		77	7321677841189	784118
	W4-300	16/302/-		102	7321677841196	784119
	W4-400	16/402/-		161	7321677841202	784120

Steel cable trays

Pre-galvanized white - Corrosion class C2

Junctions

	Type	Dimensions A/B/C mm	Weight kg/100 pcs	EAN code	Ref. No.
	T-junction W12				
	T-junction to be used for 90° horizontal junction of cable trays W1/40 and W3/40. Push-in assembly. Material: Sheet steel, pre-galvanized white.				
	W12/40-50 (flat)	-/185/248	21.2	3606480994982	CSU795384
	W12/40-70	38/267/167	49	7321677291397	729139
	W12/40-100	38/297/197	64	7321677291403	729140
	W12/40-200	38/397/297	128	7321677291410	729141
	W12/40-300	38/497/397	212	7321677291427	729142
	W12/40-400	38/597/497	314	7321677291434	729143
	W12/40-500	38/697/597	438	7321677291441	729144
	W12/40-600	38/797/697	580	7321677291458	729145
	T-junction to be used for 90° horizontal junction of cable trays W1/60 and W3/60. Push-in assembly. Material: Sheet steel, pre-galvanized white.				
	W12/60-70	58/267/167	54	7321677824243	782424
	W12/60-100	58/297/197	70	7321677824250	782425
	W12/60-150	58/347/247	99	7321677824267	782426
	W12/60-200	58/397/297	133	7321677824274	782427
	W12/60-300	58/497/397	217	7321677824281	782428
	W12/60-400	58/597/497	320	7321677824298	782429
	W12/60-500	58/697/597	443	7321677824304	782430
	W12/60-600	58/797/697	585	7321677824311	782431
	W12/60-500 FS	58/697/597	337	7321677871926	787192
	W12/60-600 FS	58/797/697	454	7321677871933	787193
	X-junction W13				
	X-junction to be used for 90° horizontal junction of cable trays W1/40 and W3/40. Push-in assembly. Material: Sheet steel, pre-galvanized white.				
	W13/40-50 (flat)	-/248/248	24.9	3606480995026	CSU795388
	W13/40-70	38/267/267	64	7321677291465	729146
	W13/40-100	38/297/297	80	7321677291472	729147
	W13/40-200	38/397/397	150	7321677291489	729148
	W13/40-300	38/497/497	240	7321677291496	729149
	W13/40-400	38/597/597	350	7321677291502	729150
	W13/40-500	38/697/697	480	7321677291519	729151
	W13/40-600	38/797/797	630	7321677291526	729152
	X-junction to be used for 90° horizontal junction of cable trays W1/60 and W3/60. Push-in assembly. Material: Sheet steel, pre-galvanized white.				
	W13/60-70	58/268/268	62	7321677824403	782440
	W13/60-100	58/298/298	78	7321677824410	782441
	W13/60-150	58/348/348	110	7321677824427	782442
	W13/60-200	58/398/398	146	7321677824434	782443
	W13/60-300	58/498/498	234	7321677824441	782444
	W13/60-400	58/598/598	342	7321677824458	782445
	W13/60-500	58/698/698	469	7321677824465	782446
	W13/60-600	58/798/798	616	7321677824472	782447
	W13/60-500 FS	58/698/698	328	7321677871964	787196
	W13/60-600 FS	58/798/798	441	7321677871971	787197
	Cover plate W16				
	Cover plate to be used to level out the differences in level between cable tray and junctions, such as 90° bends, T- and X-junctions. To be mounted under the junctions. Material: Sheet steel, pre-galvanized white.				
	W16-70	1.5/70/70	6	7321677291540	729154
	W16-100	1.5/100/100	12	7321677291557	729155
	W16-200	1.5/200/200	48	7321677291564	729156
	W16-300	1.5/300/300	108	7321677291571	729157
	W16-400	1.5/400/400	192	7321677291588	729158

Steel cable trays

Pre-galvanized white - Corrosion class C2

Vertical riser

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Vertical riser W11					
Vertical riser to be used as internal or external riser for cable tray W1/40 and W3/40. The riser is delivered flat and can be bent to the desired angle up to 90°. Push-in assembly. Material: Sheet steel, pre-galvanized white.					
W11/40-50	-38/48/150		8	7321677341016	734101
W11/40-70	-68/150		10	7321677291267	729126
W11/40-100	-98/150		12	7321677291274	729127
W11/40-200	-198/200		28	7321677291281	729128
W11/40-300	-298/200		39	7321677291298	729129
W11/40-400	-398/200		50	7321677291304	729130
W11/40-500	-498/200		61	7321677291311	729131
W11/40-600	-598/200		73	7321677291328	729132
Vertical riser W11/60					
Vertical riser to be used as internal or external riser for cable tray W1/60 and W3/60. The riser is delivered flat and can be bent to the desired angle up to 90°. Push-in assembly. Material: Sheet steel, pre-galvanized white.					
W11/60-70	-67/150		12	7321677825936	782593
W11/60-100	-97/150		15	7321677825943	782594
W11/60-150	-147/150		19	7321677825950	782595
W11/60-200	-197/200		31	7321677825967	782596
W11/60-300	-297/200		42	7321677825974	782597
W11/60-600	-397/200		53	7321677825981	782598
W11/60-500	-497/200		64	7321677825998	782599
W11/60-600	-597/200		75	7321677826001	782600
Vertical riser W4					
Vertical riser suitable for installation tray W4. To be used as internal or external riser. The riser is delivered flat and can be bent to the desired angle up to 90°. Material: Sheet steel, pre-galvanized white.					
W4-50	16/52/250		15	7321677841059	784105
W4-75	16/77/250		19	7321677841066	784106
W4-100	16/102/250		24	7321677841073	784107
W4-150	16/152/250		33	7321677841080	784108
W4-200	16/202/250		42	7321677841097	784109
W4-250	16/252/250		58	7321677841103	784110
W4-300	16/302/250		68	7321677841110	784111
W4-400	16/402/250		77	7321677841127	784112


0DA723228



782279



784085



Steel cable trays

Pre-galvanized white - Corrosion class C2

Reducers

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Reducer W28/40					
Reducer for cable tray W1/W3, system height 40. To be used together with side joint W49 in side transitions. In centered transitions only two reducers W28 are necessary. Material: Sheet steel, pre-galvanized white.					
W28/40-50	37.5/50/200		15	7321677935796	793579
W28/40-100	37.5/100/200		17	7321677874385	787438
W28/40-150	37.5/150/200		20	7321677935802	793580
W28/40-200	37.5/200/200		23	7321677874392	787439
W28/40-250	37.5/250/200		26	7321677935819	793581
W28/40-300	37.5/300/200		29	7321677935826	793582
W28/40-350	37.5/350/200		32	7321677935833	793583
W28/40-400	37.5/400/200		36	7321677935840	793584
W28/40-450	37.5/450/200		39	7321677935857	793585
W28/40-500	37.5/500/200		41	7321677935864	793586

PTCSJ-0026



Reducer W28/60					
Reducer for cable tray W1/W3, system height 60. To be used together with side joint W49 in side transitions. In centered transitions only two reducers W28 are necessary. Material: Sheet steel, pre-galvanized white.					
W28/60-50	57.5/50/200		22	7321677936151	793615
W28/60-100	57.5/100/200		27	7321677874446	787444
W28/60-150	57.5/150/200		31	7321677936168	793616
W28/60-200	57.5/200/200		36	7321677874453	787445
W28/60-250	57.5/250/200		40	7321677936175	793617
W28/60-300	57.5/300/200		45	7321677936182	793618
W28/60-350	57.5/350/200		49	7321677936199	793619
W28/60-400	57.5/400/200		54	7321677936205	793620
W28/60-450	57.5/450/200		58	7321677936212	793621
W28/60-500	57.5/500/200		63	7321677936229	793622

787443



End covers

End cover W45					
End cover to be mounted at the ends of cable trays W1/40 and W3/40 and of lighting trunking W70. Provided with oval holes 6x55 mm on the sides. Push-in assembly. Material: Sheet steel, pre-galvanized white.					
W45/40-70	38/100/68		8	7321677291779	729177
W45/40-100	38/100/98		9	7321677291786	729178
W45/40-200	38/100/198		12	7321677291793	729179
W45/40-300	38/100/298		15	7321677291809	729180
W45/40-400	38/100/398		18	7321677291816	729181
W45/40-500	38/100/498		21	7321677291823	729182
W45/40-600	38/100/598		24	7321677291830	729183
End cover to be mounted at the ends of cable trays W1/60 and W3/60. Provided with oval holes 6x55 mm on the sides. Push-in assembly. Material: Sheet steel, pre-galvanized white.					
W45/60-70	58/100/68		12	7321677867714	786771
W45/60-100	58/100/98		13	7321677867721	786772
W45/60-200	58/100/198		18	7321677867738	786773
W45/60-300	58/100/298		23	7321677867745	786774
W45/60-600	58/100/398		28	7321677867752	786775
W45/60-500	58/100/498		34	7321677867769	786776
W45/60-600	58/100/598		39	7321677867776	786777

787432



PTCSJ-0027



Steel cable trays

Pre-galvanized white - Corrosion class C2

Box plates

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Junction box plate W24						
PTCSU-0028 	Junction box plate, with or without perforated hole pattern. To be used for the installation of junction boxes, light fittings, etc. in cable trays W1/40 and W3/40 and in lighting trunking W70. Material: Sheet steel, pre-galvanized white.					
	W24/40	161/43/200		27	7321677291847	729184
PV32627 	W24/40 non-perforated	161/43/200		31	7321677342112	734211
Junction box plate W60						
PTCSU-0028 	Junction box plate, with perforated hole pattern. To be used for the installation of junction boxes, light fittings, etc., in cable trays W1/60 and W3/60. Material: Sheet steel, pre-galvanized white.					
	W24/60	179/43/200		34	7321677826599	782659
Earth clamp W79						
PTCSU-0040 	Earth clamp to be used when protective earthing of the junction box plate is required. Material: Steel, electro-galvanized.					
	W79	Screw M4/-/4.5		0.2	7321677166404	716640

Outlet and junction box sets

Junction box set						
PTCSU-0028 	Junction box set including junction box plate W24/40 and a pre-mounted junction box UP, IP-class IP55. Material: Sheet steel, pre-galvanized.					
	Junction box set	161/50/200		39	7321677319640	731964
Outlet set						
PV32629 	Outlet set including junction box plate W24/40 and a pre-mounted outlet, 2-way. Material: Sheet steel, pre-galvanized.					
	Outlet set	161/53/200		36	7321677342280	734228

Luminaire brackets

Luminaire bracket W25						
PTCSU-0030 	Luminaire bracket to be used for assembly of lighting fixtures under Cable trays W1/40 and W3/40 or Lighting trunking W70. Material: Sheet steel, pre-galvanized white.					
	W25/40-70	62/30/72		7	7321677291854	729185
	W25/40-100	62/30/101		8	7321677291861	729186
	W25/40-200	62/30/201		11	7321677291878	729187
	W25/40-300	62/30/301		19	7321677291885	729188
	W25/40-400	62/30/401		23	7321677291892	729189
	W25/40-500	62/30/501		27	7321677291908	729190
	W25/40-600	62/30/601		31	7321677291915	729191
PTCSU-0031 	Luminaire bracket to be used for assembly of lighting fixtures under Cable trays W1/60 and W3/60. Material: Sheet steel, pre-galvanized white.					
	W25/60-70	82/30/72		7.7	7321677826148	782614
	W25/60-100	82/30/101		8.6	7321677826155	782615
	W25/60-200	82/30/201		14	7321677826162	782616
	W25/60-300	82/30/301		18	7321677826179	782617
	W25/60-400	82/30/401		23	7321677826186	782618
	W25/60-500	82/30/501		27	7321677826193	782619
	W25/60-600	82/30/601		32	7321677826209	782620
Luminaire bracket W50						
PTCSU-0032 	Luminaire bracket to be used to mount lighting fittings between two parallel Cable trays W1/W3 or Lighting trunking W70. Dimension A (* height) is specified when ordering and is depending on the height of the lighting fitting. The weight ** is calculated for a bracket with a height of 100 mm. Material: Sheet steel, pre-galvanized white.					
	W50	* /30/250		25**	7321677207855	720785
Luminaire bracket W35						
PTCSU-0033 	Luminaire bracket to be used to mount centralized lighting fixtures under Lighting trunking W70. Material: Sheet steel, pre-galvanized.					
	W35	15/30/70		3	7321677156504	715650

Steel cable trays

Pre-galvanized white - Corrosion class C2

Luminaire brackets

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
PTCSU-0041 	Luminaire bracket W55					
	Luminaire bracket to be used to mount lighting fixtures under Lighting trunking W70. Material: Sheet steel, pre-galvanized.					
	W55	16/12/42		8	7321677209798	720979

Integrated ceiling parts

777980 	Shade ledge W26					
	Shade ledge to be used as a support for ceilings mounted between cable trays with system height 40 mm. Suspended over the lateral side of the cable tray. Also suitable for Lighting trunking W70. Material: Sheet steel, pre-galvanized white.					
	W26/40	51/41/2000		154	7321677291922	729192
PTCSU-0034 	Shade ledge to be used as a support for ceilings mounted between cable trays with system height 60 mm. Suspended over the lateral side of the cable tray. Material: Sheet steel, pre-galvanized white.					
	W26/60	61/42/2000		185	7321677826612	782661
PTCSU-0035 	Ceiling support W27					
	Integrated support channel to be used as a support for false ceilings mounted between cable trays with system height 40 mm. Suspended over the lateral side of the cable tray. Also suitable for Lighting trunking W70. Material: Sheet steel, pre-galvanized white.					
	W27/40	41/25/2000		130	7321677291939	729193
PTCSU-0003 	Integrated support channel to be used as a support for false ceilings mounted between cable trays with system height 60 mm. Suspended over the lateral side of the cable tray. Material: Sheet steel, pre-galvanized white.					
	W27/60	60/25/2000		160	7321677826629	782662
PTCSU-0004 	Locking clamp W77					
	Locking clamp to be used when pendant rail W32 is mounted between two parallel lighting trunking W70 or cable trays W1/W3 for additional stability. Material: Sheet steel, pre-galvanized white.					
	W77	12/40/47		1.5	7321677290604	729060

Steel cable trays

Pre-galvanized white - Corrosion class C2

Screws, bolts and nuts

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Screw set W34					
	Screw set to be used for mounting of Cable tray W3 onto Cantilever arm 50, Locking clamp W77 and Angle bracket W8 onto Pendant rail W32, Junction box plate W24 onto W3 Cable tray or Lighting trunking W70, as well as for assembly of Angle bracket W8 (light fitting bracket) and for joining of W4 Installation trays. Set including screw MSCS 6x12 and nut M6MF 6. Material: Steel, electro-galvanized.					
P40166	W34	10/10/16		0.8	7321677184736	718473
	Screw set W36					
	Screw set including bolt and nut M8 to be used for the mounting of single Pendant attachment W21 or Tube pendant attachment W73 on Support bracket/joint W7. Material: Steel, electro-galvanized.					
715646	W36	M8		1.2	7321677156467	715646
	Screw set W36C					
	Screw set including bolt with slotted screw head and nut M8. To be used for the mounting of single Pendant attachment W21 or Tube pendant attachment W73 on Support bracket/joint W7. Material: Steel, electro-galvanized.					
783500	W36C	M8		1.8	7321677835003	783500
	Screw set W37					
	Screw set including bolt MVB 8x35 and nut M6MF 8, to be used for assembly of Pendant attachment W21 and Ceiling attachment W31 with Pendant rail W32, and for the joining of Pendant rail W32. Material: Steel, electro-galvanized.					
716799	W37	M8		2.8	7321677167999	716799
	Screw set W38P C4 white					
	Screw set including screw (with screw head lacquered white) and nut, to be used for the mounting of joints, bends, junctions, shade ledge W26 and integrated ceiling support channel W27. The patented screw set pierces through painted surfaces securing potential balancing. N.B. The joints must be unpainted. Material: Steel, dacromet, white.					
0DA72577	W38P C4 white	–		0.4	7321677822164	782216
	Screw W40					
	Screw (RXS ST 5.5x13-H) to be used for the locking of T-joint W29 in open junctions. Material: Steel, electro-galvanized.					
0DA72968	W40	–		0.3	7321677218684	721868
	T-bolt 26U					
	T-bolt to be used for mounting with all vertical pieces (except Vertical piece 2) and with Pendant/fixing rail 24/48. Material: Steel, hot-dip-galvanized.					
	26U M8x30	50/44/18		6.8	3606489579777	CSU795595
T-bolt angle-40	26U M10x30	50/44/18		6.8	3606489579715	CSU795589
	Locking plug W41					
	Locking plug to be used for quick locking of joints, bends and branches in cable trays and lighting trunking. Material: PP+GF10.					
PTCSU-0007	W41	Ø14/10.5		0.1	7321677186457	718645

Steel cable trays

Pre-galvanized white - Corrosion class C2

Threaded rods

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Threaded rod W76						
 ca408050000	Threaded rod M6 to be used for light-duty cable tray W1/W3 and lighting trunking W70 suspensions. Material: Steel, electro-galvanized.					
	W76 M6	1000/6/6		18	7321677840618	784061
	W76 M6	2000/6/6		36	7321677929344	792934
	W76 M6	3000/6/6		54	7321677929351	792935
Threaded rod M8						
 ca408050000	Threaded rod M8 to be used to suspend cable tray W1/W3 and lighting trunking W70 installations. Material: Steel, electro-galvanized.					
	W76 M8	1000/8/8		32	7321677250790	725079
Threaded rod M10						
 P44074	Threaded rod M10 to be used to suspend cable tray W1/W3 and lighting trunking W70 installations. Material: Steel, electro-galvanized white.					
	W76 M10	2000/10/10		100	7321677290611	729061
	W76 M10	3000/10/10		150	7321677290628	729062
Joint nut M6, M8, M10						
 PTCSU-0043	Joint nut to be used to connect two lengths of threaded rods W76. Material: Steel, electro-galvanized.					
	Joint nut M6	30/11.5/10		1.2	7321677840632	784063
	Joint nut M8	40/15/13		5.0	7321677250837	725083
	Joint nut M10	40/18.5/16		7.2	7321677248063	724806
Thread lock B50						
 P44094	Thread lock M8 and M10 to be used to connect two lengths of threaded rods. Provides a quick and screw-less height adjustment of the threaded rod. Material: Steel, electro-galvanized.					
	B50/M8	10/20/35		1	7332227014564	1149456
	B50/M10	12/24/35		2	7332227014663	1149466
Flange nut M6						
 P44075A	Flange nut to be used to mount support brackets and ceiling brackets onto threaded rods W76. Material: Steel, electro-galvanized.					
	Flange nut M6	M6		0.4	7321677840625	784062
Flange nut B43						
 P44075A	Flange nut to be mounted onto Threaded rod W76 in order to lock it to the Support hook and the Ceiling fittings. Package of 50 pcs. Material: Steel, electro-galvanized.					
	B43/M8	17/17/8		0.4/bag	7321677888474	1149405
	B43/M10	20/20/15		0.56/bag	7332227014649	1149464
Pendant attachment W73						
 PTCSU-0001	Tube pendant attachment to be used for mounting of threaded rod W76 M6/M10 in ceiling and cable tray W1/W3 and lighting trunking W70/71. Provides a quick and screw-less height adjustment of the threaded rod. Material: Sheet steel, pre-galvanized white.					
	W73 M6	135/26/56		7	7321677912070	791207
	W73 M10	135/26/56		7	7321677290550	729055

Steel cable trays

Pre-galvanized white - Corrosion class C2

Ogebe fixings					
716474 	Type	Dimensions A/B/C mm	Weight kg/100 pcs	EAN code	Ref. No.
	Ogebe fixings Ogebe fixing type E to be used for mounting in 0.7-0.9 mm sheeting or board material. Examples are hole straps, pendants, ducts, trays and piping. Material: Steel, elctro-galvanized.				
	Type E	40/25/48	4.8	7321677164745	716474

Brackets					
PTCSU-0037 	Support bracket W1940 Support bracket to be used for invisible installation of cable trays W1/40 and W3/40. Material: Sheet steel, pre-galvanized white.				
	W1940-100	36/65/90	11	7321677290413	729041
	W1940-200	36/65/190	22	7321677290420	729042
	W1940-300	36/65/289	50	7321677290437	729043
	W1940-400	36/65/389	68	7321677290444	729044
	W1940-500	36/65/489	91	7321677837533	783753
	W1940-600	36/65/589	110	7321677837540	783754
	Support bracket W1960 Support bracket to be used for invisible installation of cable trays W1/60 and W3/60. Material: Sheet steel, pre-galvanized white.				
PTCSU-0037 	W1960-100	56/65/89	19	7321677831661	783166
	W1960-200	56/65/189	37	7321677831678	783167
	W1960-300	56/65/289	58	7321677831685	783168
	W1960-400	56/65/389	77	7321677831692	783169
	W1960-500	56/65/489	96	7321677831708	783170
	W1960-600	56/65/589	115	7321677831715	783171
	Support bracket W20A Support bracket to be used for invisible installation of lighing trunking W70/71, width 70 and 100 mm. The support bracket is snapped firmly into the trunking. The spring locking device facilitates easy vertical height adjustment. Suitable for threaded rod W76 M10. Material: Sheet steel, pre-galvanized white.				
PTCSU-0049 	W20A-70	145/75/66	15	7321677290277	729027
	W20A-100	148/89/90	20	7321677290284	729028

Steel cable trays

Pre-galvanized white - Corrosion class C2

Cantilever arms

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Cantilever arm 50i					
	Cantilever arm 50i to be used for lighter mountings on walls, vertical pieces or pendant/fixing rails. Material: Steel, pre-galvanized white.					
	50i-100	80/43/150		19	7321677914166	791416
	50i-200	85/43/250		29	7321677914173	791417
	50i-300	110/43/350		46	7321677914180	791418
	50i-400	115/44/450		83	7321677914197	791419
	Internal cantilever arm W17/40					
	Internal cantilever arm to be used for invisible mounting inside cable tray W1/40 and W3/40. Material: Sheet steel, pre-galvanized white.					
	W17/40-100	140/55/119		16	7321677290291	729029
	W17/40-200	140/55/219		35	7321677290307	729030
	W17/40-300	165/75/319		80	7321677290314	729031
	W17/40-400	165/75/419		100	7321677290321	729032
	Adjustable internal cantilever arm W1840					
	Adjustable internal cantilever arm to be used for invisible mounting inside cable trays W1/40 and W3/40. Adjustability 0-25 mm (W1840-100) and 0-50 mm (W1840-200-600). Material: Sheet steel, pre-galvanized white.					
	W1840-100	160/60/88		36	7321677290338	729033
	W1840-200	160/60/188		47	7321677290345	729034
	W1840-300	185/60/289		120	7321677835911	783591
	W1840-400	185/60/389		139	7321677835928	783592
	W1840-500	185/60/489		156	7321677835935	783593
	W1840-600	185/60/589		175	7321677835942	783594
	Adjustable internal cantilever arm W1860					
	Adjustable cantilever arm to be used for invisible mounting inside cable trays W1/60 and W3/60. Adjustability 0-25 mm (100 mm length) and 0-50 mm (other lengths). Material: Sheet steel, pre-galvanized white.					
	W1860-100	160/60/89		47	7321677835041	783504
	W1860-200	160/60/189		65	7321677835058	783505
	W1860-300	185/60/289		123	7321677835065	783506
	W1860-400	185/60/389		142	7321677835072	783507
	W1860-500	185/60/489		161	7321677835089	783508
	W1860-600	185/60/589		180	7321677835096	783509
	Pendant bracket 80					
	Pendant bracket W80 mounted under lighting trunking W70-50 and attached with screw set W36/W36C. Threaded rod W76 M6 is easily mounted in the spring clasp without bolts. Adjustable to ± 30 mm. Material: Sheet steel, pre-galvanized white.					
	W80 M6	160/35/76		5.4	3606480994906	CSU795372
	Pendant bracket W81					
	Pendant bracket W81 is mounted under lighting trunking W70-50 and is attached with screw set W37. Pendant rail W32 is mounted mounted using screw set W37. Adjustable to ± 18 mm. Material: Sheet steel, Zinkpox coated white.					
	W81 M6	140/2/76		4.1	3606480994920	CSU795378
	Wire Bracket W70-50					
	Wire bracket for screwless fixation, central suspension of lighting trunking W70-50. Material: Steel, hot-dip galvanized.					
	Wire bracket	70/52/58		2.2	3606480994883	CSU795370
	Back plate W30					
	Back plate to be used for wall installation of internal cantilever arms on porous walls, to reduce the surface pressure. Material: Sheet steel, pre-galvanized white.					
	W30	135/3/135		42	7321677867936	786793

Steel cable trays

Pre-galvanized white - Corrosion class C2

Vertical pieces

Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Cable trays, perforated

Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Cable tray W3					
Perforated cable tray for indoor or outdoor industrial applications. System height 40 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Oval holes along the lateral sides of the tray can be used for mounting of accessories. Material: Steel, hot-dip galvanized.					
W3/40-50	40/50/3000		110	7321677354009	735400
W3/40-70	40/70/3000		120	7321677354016	735401
W3/40-100	40/100/3000		156	7321677354023	735402
W3/40-150	40/150/3000		170	7321677354030	735403
W3/40-200	40/200/3000		220	7321677354047	735404
W3/40-300	40/300/3000		350	7321677354054	735405
W3/40-400	40/400/3000		453	7321677354061	735406
W3/40-500	40/500/3000		620	7321677354078	735407
W3/40-600	40/600/3000		723	7321677354085	735408

PTCSU-0018



Installation tray W4					
Perforated installation tray for indoor or outdoor industrial applications. To be used when leading cables down from a cable ladder to machine cabinets, etc. Provided with holes Ø 3.5 mm in the bottom segment of the tray for the clamping of cables with plate screws. Material: Zinc+.					
W4-50	15/50/1960		57	7321677959983	CSU795998
	15/50/3000		57	7321677959921	CSU795992
W4-75	15/75/1960		76	7321677959990	CSU795999
	15/75/3000		76	7321677959938	CSU795993
W4-100	15/100/1960		93	7321677960002	CSU796000
	15/100/3000		93	7321677959945	CSU795994
W4-150	15/150/1960		125	7321677960019	CSU796001
	15/150/3000		125	7321677959952	CSU795995
W4-200	15/200/1960		195	7321677960026	CSU796002
	15/200/3000		195	7321677959969	CSU795996
W4-300	15/300/1960		238	7321677960040	CSU796004
W4-400	15/400/1960		313	7321677960057	CSU796005

ODAY55902

**Lighting trunking**

Lighting trunking W70-50, -70, -100					
Cable tray with bottom perforation for indoor applications in dry environments. System height 40 mm, length 3000 mm. Oval holes 9x5.8 mm on the lateral sides of the tray end can be used for fixation of joints. The oval hole pattern at the base of the tray can be used for mounting of lighting fixtures. On every 500 mm an oval hole is placed to easily guide fast connectors into the tray. Material: Steel, hot-dip galvanized.					
W70-50	40/50/3000		271	3606480756115	CSU795218
W70-70	40/70/3000		293	3606480464812	CSU794528
W70-100	40/100/3000		346	3606480464829	CSU794529

PTCSU-0019



PTCSU-0020

Covers

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Cover W5					
Cover to be used to protect the cables inside the cable tray against damages, dust, liquids, UV-influence, etc. Material: Sheet steel, Zinc+					
W5-70	10/71/2000		160	7321677960224	CSU796022
W5-100	10/101/2000		210	7321677960231	CSU796023
W5-150	10/151/2000		290	7321677960248	CSU796024
W5-200	10/201/2000		370	7321677960255	CSU796025
W5-300	10/301/2000		540	7321677960262	CSU796026
W5-400	10/401/2000		710	7321677960279	CSU796027
W5-500	10/501/2000		880	7321677960286	CSU796028
W5-600	10/601/2000		1050	7321677960293	CSU796029
Cover clamp W62					
Cover clamp to be used for the fixing of covers on cable trays W3 as well as on lighting trunking W70. Material: Stainless steel 304.					
W62	-/15/10.5		0.8	7321677301867	730186

P40357



P40808



Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Dividers

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
 P140356	Dividing strip 39					
	Dividing strip to be used to separate power and data communication cables inside a W3 cable tray or W70 lighting trunking. Material: Steel, hot-dip galvanized.					
	39/24	24/24/1750		46	7321677317479	731747
	39/55	55/24/1750		73	7321677329830	732983
 P140044	Insert piece W39					
	Insert piece to be used to join Dividing strips 39/24 in cable tray W3 and lighting trunking W70. The Insert piece can be positioned on Support bracket/joint W7/40 to ensure a continuous separation of cables inside the cable tray. Material: Plastic, natural coloured.					
	W39	37/-/330		3	7321677168248	716824




Joints

 782212 40-50, 40-70, 100, 40-150, 40-200	Joint W7/40					
	To be used as a joint for cable tray W3/40 and for lighting trunking W70. Material: Sheet steel, hot-dip galvanized.					
 PTCSU-0006 40-300, 40-400	W7/40-50	38/46/200		18	7321677912735	791273
	W7/40-70	38/66/200		21	7321677912742	791274
 782212 40-500, 40-600	W7/40-100	38/96/200		26	7321677912759	791275
	W7/40-150	38/146/200		34	7321677912766	791276
 PTCSU-0021	W7/40-200	38/196/200		42	7321677912773	791277
	W7/40-300	38/296/300		107	7321677912780	791278
 PTCSU-0022	W7/40-400	38/396/300		137	7321677912797	791279
	W7/40-500	38/496/300		166	7321677912803	791280
 PTCSU-0023	W7/40-600	38/596/300		195	7321677912810	791281
	Side joint W49					
	Side joint to be used for straight joining of cable tray W3/40. Material: Sheet steel, hot-dip galvanized.					
	W49/40	37.5/-/300		17	7321677301911	730191
 PTCSU-0022	Flexible coupler W3-40					
	Side joint to be used for straight joining of cable tray W3/40 and can also be used to create T-junctions, X-junctions, reducers (left, right and straight), horizontal bends, vertical risers and direct mounting suspension strips. Material: Sheet steel, zinc+ treatment					
	W3/40	36/2/300		17	3606480788987	CSU795136
 PTCSU-0023	Joint W2					
	Side joint to be used for straight joining of installation tray W4. Material: Sheet steel, hot-dip galvanized.					
	W2	15/25/200		8	7321677885732	788573

Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4


Bends

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.	
T-joint W9							
	T-joint to be used to construct T-sections or X-sections. Also used for oblique branches. The ref. number includes two pieces of T-joints and Screw set W38P. Material: Sheet steel, hot-dip galvanized.						
	W9/40	40/72.5/20		6	7321677346226	734622	
90° bend W10F							
	Horizontal 90° bend to be used for cable trays W3/40. Push-in assembly. Material: Sheet steel, hot-dip galvanized.						
	W10/40-50 (flat)	38/183/183		14.9	3606480994951	CSU795381	
	W10F/40-50	38/47/119		14	7321677836604	783660	
	W10F/40-70	38/67/153		23	7321677836611	783661	
	W10F/40-100	38/97/204		39	7321677836628	783662	
	W10F/40-150	38/147/290		74	7321677836635	783663	
	W10F/40-200	38/197/375		119	7321677836642	783664	
	W10F/40-300	38/297/480		242	7321677836659	783665	
	W10F/40-400	38/397/580		353	7321677836666	783666	
	W10F/40-500	38/497/714		528	7321677836673	783667	
	W10F/40-600	38/597/814		685	7321677836680	783668	
	Adjustable bend W10S						
	Adjustable bend to be used for horizontal angling from 105° to 165° in steps of 7.5°. Push-in assembly. Material: Sheet steel, hot-dip galvanized.						
	W10S/40-50	38/47/47		9	7321677345915	734591	
	W10S/40-70	38/67/67		10	7321677345922	734592	
	W10S/40-100	38/97/97		13	7321677345939	734593	
	W10S/40-150	38/147/147		24	7321677345946	734594	
	W10S/40-200	38/197/197		40	7321677345953	734595	
	W10S/40-300	38/297/297		94	7321677345960	734596	
	W10S/40-400	38/397/397		156	7321677345977	734597	
	W10S/40-500	38/497/497		270	7321677345984	734598	
	W10S/40-600	38/597/597		380	7321677345991	734599	
	90° bend W4						
		Horizontal 90° bend to be used for cable tray W4. To be mounted on the outside of the tray and attached in the bottom segment with screw set W38P. Material: Sheet steel, Zinc+.					
W4-50		16/52/-		10	7321677960064	CSU796006	
	W4-75	16/77/-		15	7321677960071	CSU796007	
	W4-100	16/102/-		22	7321677960088	CSU796008	
	W4-150	16/152/-		37	7321677960095	CSU796009	
	W4-200	16/202/-		55	7321677960101	CSU796010	
	W4-300	16/302/-		102	7321677960125	CSU796012	
	W4-400	16/402/-		161	7321677960132	CSU796013	
	T-junction W12F						
		T-junction to be used for 90° horizontal junction of cable trays W3/40. Push-in assembly. Material: Sheet steel, hot-dip galvanized.					
		W12/40-50 (flat)	-/185/248		21.6	3606480994999	CSU795385
		W12F/40-50	38/47/171		21	7321677836703	783670
W12F/40-70		38/67/219		29	7321677836710	783671	
W12F/40-100		38/97/312		49	7321677836727	783672	
W12F/40-150		38/147/432		89	7321677836734	783673	
W12F/40-200		38/197/553		154	7321677836741	783674	
W12F/40-300		38/297/662		300	7321677836758	783675	
W12F/40-400		38/397/762		428	7321677836765	783676	
W12F/40-500		38/497/932		640	7321677836772	783677	
W12F/40-600		38/597/1032		817	7321677836789	783678	


Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Junctions

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
 	X-junction W13F					
	X-junction to be used for 90° horizontal junction of cable trays W3/40. Push-in assembly. Material: Sheet steel, hot-dip galvanized.					
	W13/40-50 (flat)	-/248/248		26.5	3606480995033	CSU795389
	W13F/40-50	38/47/148		21	7321677836802	783680
	W13F/40-70	38/67/217		34	7321677836819	783681
	W13F/40-100	38/97/313		59	7321677836826	783682
	W13F/40-150	38/147/434		117	7321677836833	783683
	W13F/40-200	38/197/555		194	7321677836840	783684
	W13F/40-300	38/297/662		370	7321677836857	783685
	W13F/40-400	38/397/762		510	7321677836864	783686
	W13F/40-500	38/497/932		766	7321677836871	783687
	W13F/40-600	38/597/1032		966	7321677836888	783688

Vertical risers

	Vertical riser W11					
	Vertical riser to be used as internal or external riser for cable trays W3/40. The riser is delivered flat and can be bent to the desired angle up to 90°. Push-in assembly. Material: Sheet steel, hot-dip galvanized.					
	W11/40-50	-/48/150		8	7321677341016	734101
	W11/40-70	-/68/150		10	7321677341023	734102
	W11/40-100	-/98/150		12	7321677341030	734103
	W11/40-150	-/148/150		17	7321677341047	734104
	W11/40-200	-/198/200		28	7321677341054	734105
	W11/40-300	-/298/200		39	7321677341061	734106
	W11/40-400	-/398/200		50	7321677341078	734107
	W11/40-500	-/498/200		61	7321677341085	734108
	W11/40-600	-/598/200		73	7321677341092	734109
	Vertical riser W11F					
	W11F40-50	-/48/300		26	7321677839087	783908
	W11F40-70	-/68/300		31	7321677839094	783909
	W11F40-100	-/98/300		40	7321677839100	783910
	W11F40-150	-/148/300		51	7321677839117	783911
	W11F40-200	-/198/300		66	7321677839124	783912
	W11F40-300	-/298/300		109	7321677839131	783913
	W11F40-400	-/398/300		140	7321677839148	783914
	W11F40-500	-/498/300		164	7321677839155	783915
	W11F40-600	-/598/300		195	7321677839162	783916
	Vertical riser W4					
	Vertical riser suitable for installation tray W4. To be used as internal or external riser. The riser is delivered flat and can be bent to the desired angle up to 90°. Material: Sheet steel, Zinc+.					
	W4-50	16/52/250		15	7321677960149	CSU796014
	W4-75	16/77/250		19	7321677960156	CSU796015
	W4-100	16/102/250		24	7321677960163	CSU796016
	W4-150	16/152/250		33	7321677960170	CSU796017
	W4-200	16/202/250		42	7321677960187	CSU796018
	W4-300	16/302/250		68	7321677960200	CSU796020
	W4-400	16/402/250		77	7321677960217	CSU796021

Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Reducers

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
 PTC3U-0028 73732	Reducer W28/40					
	Reducer for cable tray W3, system height 40. To be used together with side joint W49 in side transitions. In centered transitions only two reducers W28 are necessary. Material: Sheet steel, hot-dip galvanized.					
	W28/40-50	37.5/50/200		15	7321677935871	793587
	W28/40-100	37.5/100/200		17	7321677935888	793588
	W28/40-150	37.5/150/200		20	7321677935895	793589
	W28/40-200	37.5/200/200		23	7321677935901	793590
	W28/40-250	37.5/250/200		26	7321677935918	793591
	W28/40-300	37.5/300/200		29	7321677935925	793592
	W28/40-350	37.5/350/200		32	7321677935932	793593
	W28/40-400	37.5/400/200		36	7321677935949	793594
	W28/40-450	37.5/450/200		39	7321677935956	793595
	W28/40-500	37.5/500/200		41	7321677935963	793596

End covers

	Type	Dimensions A/B/C mm	Weight kg/100 pcs	EAN code	Ref. No.
 73732 PTC3U-0088 73732	End cover W45				
	End cover to be mounted at the ends of cable trays W3/40 and of lighting trunking W70. Provided with oval holes 6x55 mm on the sides. Push-in assembly. Material: Sheet steel, hot-dip galvanized.				
	W45/40-70	38/100/68	8	7321677830305	783030
	W45/40-100	38/100/98	9	7321677830312	783031
	W45/40-150	38/100/148	10	7321677830329	783032
	W45/40-200	38/100/198	12	7321677830336	783033
	W45/40-300	38/100/298	15	7321677830343	783034
	W45/40-400	38/100/398	18	7321677830350	783035
	W45/40-500	38/100/498	21	7321677830367	783036
	W45/40-600	38/100/598	24	7321677830374	783037

Box plates

	Type	Dimensions A/B/C mm	Weight kg/100 pcs	EAN code	Ref. No.
 PTC3U-0028	Junction box plate W24				
	Junction box plate, with perforated hole pattern. To be used for the installation of junction boxes, light fittings, etc., in cable trays W3/40 and in lighting trunking W70. Material: Sheet steel, hot-dip galvanized.				
	W24/40	161/43/200	27	7321677346172	734617
	Box U56 w/o T + Plate W24/40	161/50/200	39	7321677958672	CSU795867
	Box AP9 + Plate W24/40	161/50/200	39	7321677958696	CSU796047
	Outlet2-W IP44+PlateW24/40	164/64/170	40	7321677958719	CSU795871

Screws, bolts and nuts

	Type	Dimensions A/B/C mm	Weight kg/100 pcs	EAN code	Ref. No.
 P44051	Screw set 22S				
	Screw set to be used for installation of Ceiling bracket 5 on Pendant/fixing rails 24/34 and 24/48, Angle bracket 5L against the back of Pendant/fixing rails, Pendant/fixing rails back to back. Set including screw MVB 8x16 and nut M6MF8. Material: Steel, hot-dip galvanized.				
	22S	-	1.9	7321677136940	713694
 P44066	Screw set W34				
	Screw set to be used for mounting of Cable tray W3 onto Cantilever arm 50 and Angle bracket W8 onto Pendant rail W32, Junction box plate W24 onto W3 Cable tray or Lighting trunking W70, as well as for assembly of Angle bracket W8 (light fitting bracket) and for joining of W4 Installation trays. Set including screw MSCS 6x12 and nut M6MF6. Material: Steel, Dacromet.				
	W34	10/10/16	0.8	7321677346462	734646
 00A735177	Screw set W38P C4				
	Screw set including screw and nut, to be used for the mounting of joints, bends, junctions, shade ledge W26 and integrated ceiling support channel W27. The patented screw set pierces through painted surfaces securing potential balancing. N.B. The joints must be unpainted. Material: Steel, dacromet.				
	Screw set W38P C4	-	0.4	7321677351770	735177

Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Screws, bolts and nuts

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	T-bolt 26U					
	T-bolt to be used for mounting with all vertical pieces (except Vertical piece 2) and with Pendant/fixing rail 24/48. Material: Steel, hot-dip galvanized.					
	26U M8x30	50/44/18		6.8	3606489579777	CSU795595
	26U M10x30	50/44/18		6.8	3606489579715	CSU795589
	26U M10x40	60/44/18		8.2	3606489579722	CSU795590
	26U M10x50	70/44/18		9.5	3606489579739	CSU795591
	Spring nut M8					
	Spring nut to be used for fastening of accessories (control panels, etc.) on Pendant/fixing rail 24/48. Material: Steel, hot-dip galvanized.					
	M8	–		2.7	7321677164073	716407
	Locking plug W41					
	Locking plug to be used for quick locking of joints, bends and branches in cable trays and lighting trunking. Material: PP+GF10.					
	W41	Ø14/10.5		0.1	7321677186457	718645

Threaded rods

	Threaded rod W76					
	Threaded rod for M8 ceiling mounting of cable support. For fixing, use Flange Nut M8 and for extension, Distance nut M8. Material: Steel, hot-dip galvanized.					
	W76/M8	8/8/1000		32	3606480483783	CSU794697
		8/8/2000		64	3606480483776	CSU734698
	Flange nut					
	Flange Nut M8 to be mounted on Threaded rod W76. Intended for ceiling mounting of cable support. Material: Steel, hot-dip galvanized.					
	Flange nut M8	17/17/8		1	3606480483806	CSU794715
	Distance nut					
	Distance nut M8 to be used as an extension and a coupler of Threaded rod W76. Intended for ceiling mounting of cable support. Material: Steel, hot-dip galvanized.					
	Distance nut M8	15/15/30		4	3606480483790	CSU794699
	Nut M8, M10					
	Nut to be used for the mounting of Threaded rod W76 M8 and M10 respectively. Material: Steel, hot-dip galvanized.					
	Nut M8	–		0.54	7321677250851	725085
	Nut M10	–		1.1	7321677239382	723938
	Mounting set W78					
	Mounting set including washer Ø50 and nut M10, to be used for mounting of threaded rod W76 in plate material or light concrete ceilings. Material: Steel, hot-dip galvanized.					
	W78	Ø50/M10		5.5	7321677170692	717069

Brackets

	Support bracket W1940					
	Support bracket to be used for invisible installation of cable trays W3/40. Material: Sheet steel, hot-dip galvanized.					
	W1940-100	36/65/90		11	7321677344529	734452
	W1940-200	36/65/190		22	7321677344536	734453
	W1940-300	36/65/289		50	7321677344543	734454
	W1940-400	36/65/389		68	7321677344550	734455
	W1940-500	36/65/489		91	7321677344567	734456
	W1940-600	36/65/589		110	7321677344574	734457

Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Cantilever arms

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Cantilever arm 50i						
	Cantilever arm to be used for lighter mountings on walls, vertical pieces or pendant/fixing rails. Dimensions 500 and 600 marked with * will be available in middle of July 2016. Material: Steel, hot dip galvanized..					
	50i/100	120/180/40		42	3606480911293	CSU795316
	50i/200	120/280/40		55	3606480911309	CSU795317
	50i/300	120/380/40		68	3606480911316	CSU795318
	50i/400	142/480/40		86	3606480911323	CSU795319
	50i/500 *	130/580/50		160	3606480911330	CSU795320
	50i/600 *	130/680/50		186	3606480911347	CSU795321
Cantilever arm 50						
	Cantilever arm for mounting on walls, pendant/fixing rails or vertical pieces. Material: Steel, hot-dip galvanized.					
	50-100	85/40/150		24	7321677234325	723432
	50-150	85/40/200		28	7321677234332	723433
	50-200	85/40/250		34	7321677234349	723434
	50-300	105/40/350		60	7321677234363	723436
	50-400	120/50/450		118	7321677234370	723437
	50-500	140/50/550		172	7321677234387	723438
	50-600	150/50/650		215	7321677234394	723439
Internal cantilever arm W17						
	Internal cantilever arm to be used for invisible mounting inside cable tray W3/40. Material: Sheet steel, hot-dip galvanized.					
	W17/40-100	140/55/119		16	7321677345724	734572
	W17/40-200	140/55/219		35	7321677345731	734573
	W17/40-300	165/75/319		80	7321677345748	734574
	W17/40-400	165/75/419		100	7321677345755	734575
Adjustable internal cantilever arm W1840						
	Adjustable internal cantilever arm to be used for invisible mounting inside cable trays W3/40. Adjustability 0-25 mm (W1840-100) and 0-50 mm (W1840-200-600). Material: Sheet steel, hot-dip galvanized.					
	W1840-100	160/60/88		36	7321677345786	734578
	W1840-200	160/60/188		47	7321677345793	734579
	W1840-300	185/60/289		120	7321677345809	734580
	W1840-400	185/60/389		139	7321677345816	734581
	W1840-500	185/60/489		156	7321677345823	734582
	W1840-600	185/60/589		175	7321677345830	734583
Pendant bracket W81						
	Pendant bracket W81 is mounted under lighting trunking W70-50 and is attached with screw set W37. Pendant rail W32 is mounted mounted using screw set W37. Adjustable to ±18 mm. Material: Sheet steel, hot-dip galvanized.					
	W81 M6	140/2/76		4.1	7321677687381	CSU795377
Wire Bracket W70-50						
	Wire bracket for screwless fixation, central suspension of lighting trunking W70-50. Material: Steel, hot-dip galvanized.					
	Wire bracket	70/52/58		2.2	3606480994883	CSU795370
Back plate 40						
	Back plate to be used for installation behind Cantilever arm 50 and 50L to reduce the surface pressure on porous walls. Material: Steel, hot-dip galvanized.					
	40	150/-/60		55	7321677687381	768738
Mounting rail 40						
	Mounting rail to be used for wall installation of cantilever arms on porous walls to reduce the surface pressure or to enable height adjustment of cantilever arms. Material: Steel, hot-dip galvanized.					
	40	48/26/270		56	7321677170012	717001

Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Vertical pieces

</


Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Pendant/Fixing rails

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Pendant/Fixing rail 24/48					
	Pendant/Fixing rail for mounting of support brackets, cantilever arms, etc. Material: Steel, hot-dip galvanized.					
	24/48	1000/26/48		175	3606481317865	CSU795565
	24/48	2970/26/48		520	7321677050932	705093
	24/48	5940/26/48		1120	7321677317196	731719
	Fixing rail 24/26x53 for casting-in					
	Fixing rail for casting-in in wall and ceilings. Material: Steel, hot-dip galvanized.					
	24/26x53	4000/26/53		970	7321677680634	768063
	Pendant attachment W21					
	Pendant attachment to be used in combination with pendant rail W32, to construct a ceiling suspension. Material: Sheet steel, hot-dip galvanized.					
	W21	97/50/21		12	7321677346189	734618

Pendant bars

	Pendant bar 1					
	Pendant bar to be installed in order to reduce the deflection of heavily loaded vertical pieces. Installed with T-bolt and Expansion bolt. Material: Steel, hot-dip galvanized.					
	1-300	315/161/40		35	7321677176403	717640
	1-500	515/166/40		53	7321677176410	717641
	1-800	815/246/40		82	7321677176427	717642
	1-1500	1296/35/50		560	7321677189038	718903
	Bracket 60/40					
	Bracket to be used together with Pendant/fixing rail 24/34 to reduce the deflection of long vertical pieces. Material: Steel, hot-dip galvanized.					
	60/40	95/23/40		10	7321677189045	718904

Pendant joints

	Pendant joint 2J and 2FJ					
	Pendant joint to be used for joining pendant/fixing rails and vertical pieces. Screws M8x16 and nuts included. Material: Steel, hot-dip galvanized.					
	2J	200/48/18		43	7321677131778	713177
	2FJ	200/55/18		46	7321677131785	713178

Steel cable trays

Hot-dip galvanized - Corrosion class C3, C4

Angle brackets

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
PTCSU-001	Angle bracket W8					
	Angle bracket to be mounted inside a cable tray W3 for horizontal installation to the wall or vertical installation to the floor. Can also be mounted as a pendant bracket in the lighting trunking W70. Material: Sheet steel, hot-dip galvanized.					
	W8	80/38/45		6	7321677288830	728883
PTCSU-002	Angle bracket W8S					
	Universal angle bracket to be used for various installations of pendant/fixing rail 24/34, support bracket, etc. Material: Sheet steel, hot-dip galvanized.					
	W8S	120/30/30		8	7321677268733	726873

Mounting rails/lashing wire

P138271	Mounting rail WMS25L					
	Mounting rail to be used for installation directly on wall for lashing of cables. Material: Steel, hot-dip galvanized.					
	WMS25L	3/25/2500		141	3606489584955	CSU795597
P40226	Lashing wire					
	Lashing wire to be used for lashing of wires on cable ladders. Material: Stainless steel, PVC.					
	HTR-2303, white PVC	Ø1.25		1.3/100 m	7321677136865	713686
P40225	HTR-2313, black PVC	Ø1.25		1.3/100 m	7321677136872	713687
P40226	Lashing wire to be used for lashing of wires on cable ladders. Material: PVC.					
	HT-2304, white	Ø1.5		1.8/100 m	7321677136841	713684
P40225	HT-2314, black	Ø1.5		1.8/100 m	7321677136858	713685

End plugs

P140067	End plug 28C and E					
	End plug to be mounted on pendant ends to provide protection against personal injury and to make the ends of the profiles more conspicuous. Material: PP/TPE, orange.					
	28C for Vertical piece 2 and Pendant/fixing rail 24/34	25/19/46		0.5	7321677898756	789875
P140069	28E for Vertical piece 2F and Pendant/fixing rail 24/48	24/30/52		0.5	7321677090211	709021

Accessories

P148904	Strip fixing W44					
	Strip fixing to be used for easy fixation of cables in an unperforated cable tray W1/40 or W1/60. Material: PPE.					
	W44	5.5/25/96		1	7321677184699	718469
B224370	Protection strip W48					
	Protection strip to be used to protect cables from sharp edges when cutting the cable tray W1/W3 or lighting trunking W70. Material: Plastic.					
	W48	10/6/720		6.1	7321677872114	787211
P143450	Repair paint					
	Anti-corrosive repair paint in a 0.4 l can for the repair of damages on pre-galvanized or hot-dip galvanized trays and accessories.					
	Anti-corrosive repair paint	–		43	7321677959310	CSU795931

Steel cable trays

Zinkpox - Corrosion class C5

Cable trays, perforated

Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Cable tray W3					
Perforated cable tray for indoor or outdoor industrial applications. System height 40 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Oval holes along the lateral sides of the tray can be used for mounting of accessories. Material: Sheet steel, Zinkpox coated white.					
Contact Wibe customer service for quotation.					
Installation tray W4					
Perforated installation tray for indoor or outdoor industrial applications. To be used when leading cables down from a cable ladder to machine cabinets, etc. Provided with holes Ø 3.5 mm in the bottom segment of the tray for the clamping of cables with plate screws. Material: Sheet steel, Zinkpox coated white.					
W4-50	15/50/3000		57	7321677359998	735999
W4-75	15/75/3000		76	7321677360000	736000
W4-100	15/100/3000		93	7321677360017	736001
W4-150	15/150/3000		125	7321677360024	736002
W4-200	15/200/3000		195	7321677360031	736003
W4-250	15/250/3000		228	7321677360048	736004
W4-300	15/300/1960		238	7321677360055	736005
W4-400	15/400/1960		313	7321677360062	736006

Lighting trunking

Lighting trunking W70-50, -70, -100

Cable tray with bottom perforation for indoor applications in dry environments. System height 40 mm, length 3000 mm. Oval holes 9x5.8 mm on the lateral sides of the tray end can be used for fixation of joints.

The oval hole pattern at the base of the tray can be used for mounting of lighting fixtures. On every 500 mm an oval hole is placed to easily guide fast connectors into the tray.

Material: Sheet steel, Zinkpox coated white.

W70-50	40/50/3000	285	3606480756122	CSU795219
W70-70	40/70/3000	293	3606480464843	CSU794531
W70-100	40/100/3000	346	3606480464850	CSU794532



Steel cable trays

Zinkpox - Corrosion class C5

Covers

Steel cable trays

Zinkpox - Corrosion class C5

Bends**Type****Dimensions**
A/B/C mm**Weight**
kg/100 m**EAN code****Ref. No.****90° bend W10F**Horizontal 90° bend to be used for cable trays W3/40. Push-in assembly.
Material: Sheet steel, Zinkpox coated white.

W10/40-50 (flat)	38/183/183	14.9	3606480994968	CSU795382
W10F/40-50	38/47/119	14	7321677836000	783600
W10F/40-70	38/67/153	23	7321677836017	783601
W10F/40-100	38/97/204	39	7321677836024	783602
W10F/40-150	38/147/290	74	7321677836031	783603
W10F/40-200	38/197/375	119	7321677836048	783604
W10F/40-300	38/297/480	242	7321677836055	783605
W10F/40-400	38/397/580	353	7321677836062	783606
W10F/40-500	38/497/714	528	7321677836079	783607
W10F/40-600	38/597/814	685	7321677836086	783608

Adjustable bend W10SAdjustable bend to be used for horizontal angling from 105° to 165° in steps of 7.5°. Push-in assembly.
Material: Sheet steel, Zinkpox coated white.

W10S/40-50	38/47/47	9	7321677828500	782850
W10S/40-70	38/67/67	10	7321677828517	782851
W10S/40-100	38/97/97	13	7321677828524	782852
W10S/40-150	38/147/147	24	7321677828531	782853
W10S/40-200	38/197/197	40	7321677828548	782854
W10S/40-300	38/297/297	94	7321677828555	782855
W10S/40-400	38/397/397	156	7321677828562	782856
W10S/40-500	38/497/497	270	7321677828579	782857
W10S/40-600	38/597/597	380	7321677828586	782858

90° bend W4Horizontal 90° bend to be used for cable tray W4. To be mounted on the outside of the tray and attached in the bottom segment with screw set W38P.
Material: Sheet steel, Zinkpox coated white.

W4-50	16/52/-	10	7321677936779	793677
W4-75	16/77/-	15	7321677936786	793678
W4-100	16/102/-	22	7321677936793	793679
W4-150	16/152/-	37	7321677936809	793680
W4-200	16/202/-	55	7321677936816	793681
W4-250	16/252/-	77	7321677936823	793682
W4-300	16/302/-	102	7321677936830	793683
W4-400	16/402/-	161	7321677936847	793684

Junctions**T-junction W12F**T-junction to be used for 90° horizontal junction of cable trays W3/40. Push-in assembly.
Material: Sheet steel, Zinkpox coated white.

W12/40-50 (flat)	-/185/248	23.2	3606480995002	CSU795386
W12F/40-50	38/47/171	26	7321677836208	783620
W12F/40-70	38/67/219	35	7321677836215	783621
W12F/40-100	38/97/312	60	7321677836222	783622
W12F/40-150	38/147/432	110	7321677836239	783623
W12F/40-200	38/197/553	192	7321677836246	783624
W12F/40-300	38/297/662	300	7321677836253	783625
W12F/40-400	38/397/762	428	7321677836260	783626
W12F/40-500	38/497/932	640	7321677836277	783627
W12F/40-600	38/597/1032	817	7321677836284	783628


Steel cable trays

Zinkpox - Corrosion class C5

Junctions

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
X-junction W13F					
X-junction to be used for 90° horizontal junction of cable trays W3/40. Push-in assembly. Material: Sheet steel, Zinkpox coated white.					
W13/40-50 (flat)	-/248/248		28.1	3606480995040	CSU795390
W13F/40-50	38/47/148		27	7321677836406	783640
W13F/40-70	38/67/217		43	7321677836413	783641
W13F/40-100	38/97/313		74	7321677836420	783642
W13F/40-150	38/147/434		147	7321677836437	783643
W13F/40-200	38/197/555		243	7321677836444	783644
W13F/40-300	38/297/662		370	7321677836451	783645
W13F/40-400	38/397/762		510	7321677836468	783646
W13F/40-500	38/497/932		766	7321677836475	783647
W13F/40-600	38/597/1032		966	7321677836482	783648

P49356



PTCSU-0070




Vertical risers

Vertical riser W11					
Vertical riser to be used as internal or external riser for cable tray W3/40. The riser is delivered flat and can be bent to the desired angle up to 90°. Push-in assembly. Material: Sheet steel, Zinkpox coated white.					
W11/40-50	-/48/150		8	7321677830404	783040
W11/40-70	-/68/150		10	7321677830411	783041
W11/40-100	-/98/150		12	7321677830428	783042
W11/40-150	-/148/150		17	7321677830435	783043
W11/40-200	-/198/200		28	7321677830442	783044
W11/40-300	-/298/200		39	7321677830459	783045
W11/40-400	-/398/200		50	7321677830466	783046
W11/40-500	-/498/200		61	7321677830473	783047
W11/40-600	-/598/200		73	7321677830480	783048
Vertical riser W4					
Vertical riser suitable for installation tray W4. To be used as internal or external riser. The riser is delivered flat and can be bent to the desired angle up to 90°. Material: Sheet steel, Zinkpox coated white.					
W4-50	16/52/250		15	7321677936694	793669
W4-75	16/77/250		19	7321677936700	793670
W4-100	16/102/250		24	7321677936717	793671
W4-150	16/152/250		33	7321677936724	793672
W4-200	16/202/250		42	7321677936731	793673
W4-250	16/252/250		58	7321677936748	793674
W4-300	16/302/250		68	7321677936755	793675
W4-400	16/402/250		77	7321677936762	793676

ODX72328



794083



Reducers

Reducer W28/40					
Reducer for cable tray W3, system height 40. To be used together with side joint W49 in side transitions. In centered transitions only two reducers W28 are necessary. Material: Sheet steel, Zinkpox coated white.					
W28/40-50	37.5/50/200		15	7321677935970	793597
W28/40-100	37.5/100/200		17	7321677935987	793598
W28/40-150	37.5/150/200		20	7321677935994	793599
W28/40-200	37.5/200/200		23	7321677936007	793600
W28/40-250	37.5/250/200		26	7321677936014	793601
W28/40-300	37.5/300/200		29	7321677936021	793602
W28/40-350	37.5/350/200		32	7321677936038	793603
W28/40-400	37.5/400/200		36	7321677936045	793604
W28/40-450	37.5/450/200		39	7321677936052	793605
W28/40-500	37.5/500/200		41	7321677936069	793606



PTCSU-0026



Steel cable trays

Zinkpox - Corrosion class C5

End covers

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
End cover W45						
	End cover to be mounted at the ends of cable trays W3/40 and of lighting trunking W70. Provided with oval holes 6x55 mm on the sides. Push-in assembly. Material: Sheet steel, Zinkpox coated white.					
	W45/40-70	38/100/68		8	7321677830008	783000
	W45/40-100	38/100/98		9	7321677830015	783001
	W45/40-150	38/100/148		10	7321677830022	783002
	W45/40-200	38/100/198		12	7321677830039	783003
	W45/40-300	38/100/298		15	7321677830046	783004
	W45/40-400	38/100/398		18	7321677830053	783005
	W45/40-500	38/100/498		21	7321677830060	783006
	W45/40-600	38/100/598		24	7321677830077	783007

Box plates


Junction box plate W24						
	Junction box plate with perforated hole pattern. To be used for the installation of junction boxes, light fittings, etc., in cable trays W3/40 and in lighting trunking W70. Material: Sheet steel, Zinkpox coated white.					
	W24/40	161/43/200		27	7321677831302	783130

Screws, bolts and nuts

Screw set 22S						
	Screw set to be used for installation of Ceiling bracket 5 on Pendant/fixing rails 24/34 and 24/48, Angle bracket 5L against the back of Pendant/fixing rails, Pendant/fixing rails back to back. Set including screw MVBF 8x16 and nut M6MF8. Material: Steel, hot-dip galvanized.					
	22S	–		1.9	7321677136940	713694
Screw set W34						
	Screw set to be used for mounting of Cable tray W3 onto Cantilever arm 50 and Angle bracket W8 onto Pendant rail W32, Junction box plate W24 onto W3 Cable tray or Lighting trunking W70, as well as for assembly of Angle bracket W8 (light fitting bracket) and for joining of W4 Installation trays. Set including screw MSCS 6x12 and nut M6MF6. Material: Steel, Dacromet.					
	W34	10/10/16		0.8	7321677346462	734646
Screw set W38P C4						
	Screw set including screw and nut, to be used for the mounting of joints, bends, junctions. Material: Steel, Dacromet.					
	Screw set W38P C4	–		0.4	7321677351770	735177
T-bolt 26U						
	T-bolt to be used for mounting with all vertical pieces (except Vertical piece 2) and with Pendant/fixing rail 24/48. Material: Steel, hot-dip galvanized.					
	26U M8x30	50/44/18		6.8	3606489579777	CSU795595
	26U M10x30	50/44/18		6.8	3606489579715	CSU795589
	26U M10x40	60/44/18		8.2	3606489579722	CSU795590
	26U M10x50	70/44/18		9.5	3606489579739	CSU795591
Spring nut M8						
	Spring nut to be used for fastening of accessories (control panels, etc.) on Pendant/fixing rail 24/48. Material: Steel, hot-dip galvanized.					
	M8	–		2.7	7321677164073	716407
Locking plug W41						
	Locking plug to be used for quick locking of joints, bends and branches in cable trays and lighting trunking. Material: PP+GF10.					
	W41	Ø14/10.5		0.1	7321677186457	718645

Steel cable trays

Zinkpox - Corrosion class C5

Threaded rods						
	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
	Threaded rod W76					
	Threaded rod for M8 ceiling mounting of cable support. For fixing, use Flange Nut M8 and for extension, Distance nut M8. Material: Steel, hot-dip galvanized.					
	W76/M8	8/8/1000		32	3606480483783	CSU794697
		8/8/2000		64	3606480483776	CSU734698
	Flange nut					
	Flange Nut M8 to be mounted on Threaded rod W76. Intended for ceiling mounting of cable support. Material: Steel, hot-dip galvanized.					
	Flange nut M8	17/17/8		1	3606480483806	CSU794715
	Distance nut					
	Distance nut M8 to be used as an extension and a coupler of Threaded rod W76. Intended for ceiling mounting of cable support. Material: Steel, hot-dip galvanized.					
	Distance nut M8	15/15/30		4	3606480483790	CSU794699
	Nut M8, M10					
	Nut to be used for the mounting of Threaded rod W76 M8 and M10 respectively. Material: Steel, hot-dip galvanized.					
	Nut M8	–		0.54	7321677250851	725085
	Nut M10	–		1.1	7321677239382	723938
	Mounting set W78					
	Mounting set including washer Ø50 and nut M10, to be used for mounting of threaded rod W76 in plate material or light concrete ceilings. Material: Steel, hot-dip galvanized.					
	W78	Ø50/M10		5.5	7321677170692	717069
Brackets						
	Support bracket W1940					
	Support bracket to be used for invisible installation of cable trays W3/40. Material: Sheet steel, Zinkpox coated white.					
	W1940-100	36/65/90		11	7321677830602	783060
	W1940-200	36/65/190		22	7321677830619	783061
	W1940-300	36/65/289		50	7321677830626	783062
	W1940-400	36/65/389		68	7321677830633	783063
	W1940-500	36/65/489		91	7321677830640	783064
	W1940-600	36/65/589		110	7321677830657	783065
Cantilever arms						
	Cantilever arm 50					
	Cantilever arm for mounting on walls, pendant/fixing rails or vertical pieces. Material: Sheet steel, Zinkpox coated white.					
	50-100	85/40/150		24	7321677234400	723440
	50-150	85/40/200		28	7321677234417	723441
	50-200	85/40/250		34	7321677234424	723442
	50-300	105/40/350		60	7321677234448	723444
	50-400	120/50/450		228	7321677234455	723445
	50-500	140/50/550		172	7321677234462	723446
	50-600	150/50/650		215	7321677234479	723447

Steel cable trays

Zinkpox - Corrosion class C5

Cantilever arms

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Internal cantilever arm W17/40					
Internal cantilever arm to be used for invisible mounting inside cable tray W3/40. Material: Sheet steel, Zinkpox coated white.					
W17/40-100	140/55/119		16	7321677830664	783066
W17/40-200	140/55/219		35	7321677830671	783067
W17/40-300	165/75/319		80	7321677830688	783068
W17/40-400	165/75/419		100	7321677830695	783069
Adjustable internal cantilever arm W1840					
Adjustable internal cantilever arm to be used for invisible mounting inside cable trays W3/40. Adjustability 0-25 mm (W1840-100) and 0-50 mm (W1840-200 to 600). Material: Sheet steel, Zinkpox coated white.					
W1840-100	160/60/88		36	7321677830183	783018
W1840-200	160/60/188		47	7321677830190	783019
W1840-300	185/60/289		120	7321677830206	783020
W1840-400	185/60/389		139	7321677830213	783021
W1840-500	185/60/489		156	7321677830220	783022
W1840-600	185/60/589		175	7321677830237	783023
Pendant bracket W81					
Pendant bracket W81 is mounted under lighting trunking W70-50 and is attached with screw set W37. Pendant rail W32 is mounted using screw set W37. Adjustable to ± 18 mm. Material: Sheet steel, Zinkpox coated white.					
W81 M6	140/2/76		4,1	3606480994920	CSU795378
Wire bracket W70-50					
Wire bracket for screwless fixation, central suspension of lighting trunking W70-50. Material: Steel, hot-dip galvanized.					
Wire bracket	70/52/58		2,2	3606480994883	CSU795370
Back plate 40					
Back plate to be used for installation behind Cantilever arm 50 and 50L to reduce the surface pressure on porous walls. Material: Sheet steel, Zinkpox coated white.					
40	150/-/60		55	7321677140299	714029
Mounting rail 40					
Mounting rail to be used for wall installation of cantilever arms on porous walls to reduce the surface pressure or to enable height adjustment of cantilever arms. Material: Sheet steel, Zinkpox coated white.					
40	48/26/270		56	7321677290451	729045

Vertical pieces

Vertical piece 2					
Vertical piece to be used for installation of Support bracket W1940, symmetrical loading. Can be joined to Pendant/fixing rail 24/34 with Pendant joint 2J. Material: Sheet steel, Zinkpox coated white.					
2-300	279/80/135		52	7321677162833	716283
2-400	392/80/135		62	7321677162840	716284
2-500	504/80/135		72	7321677162857	716285
2-700	729/80/135		93	7321677162864	716286
2-1000	1022/80/135		120	7321677162871	716287
Vertical piece 2F					
Vertical piece to be used for installation of Internal cantilever arm W17/40, Adjustable cantilever arm W18/40 or Cantilever arm 50/50L. Can be joined to Pendant/fixing rail 24/48 with Pendant joint 2FJ. Material: Sheet steel, Zinkpox coated white.					
2F-280	280/80/135		80	7321677172016	717201
2F-370	370/80/135		100	7321677172023	717202
2F-505	505/80/135		130	7321677172030	717203
2F-730	730/80/135		170	7321677172047	717204
2F-1000	1000/80/135		220	7321677172054	717205
2F-1500	1495/80/135		290	7321677872770	787277

Steel cable trays


Zinkpox - Corrosion class C5

Ceiling brackets

Steel cable trays

Zinkpox - Corrosion class C5

Pendant bars

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
 P140346  P140324  P133659	Pendant bar 1					
	Pendant bar to be installed in order to reduce the deflection of heavily loaded vertical pieces. Installed with T-bolt and Expansion bolt. Material: Sheet steel, Zinkpox coated white.					
	1-300	315/161/40		35	7321677176434	717643
	1-500	515/166/40		53	7321677176441	717644
	1-800	815/246/40		82	7321677176458	717645
	1-1500	1296/35/50		560	7321677205301	720530
Bracket 60/40						
Bracket to be used together with Pendant/fixing rail 24/34 to reduce the deflection of long vertical pieces. Material: Sheet steel, Zinkpox coated white.						
	60/40	95/23/40		10	7321677205318	720531

Pendant joints

 P140347  P133660	Pendant joint 2J and 2FJ					
	Pendant joint to be used for joining pendant/fixing rails and vertical pieces. Screws M8x16 and nuts included. Material: Steel, Zinkpox coated white.					
	2J	200/48/18		43	7321677163038	716303
	2FJ	200/55/18		46	7321677163045	716304

Angle brackets

 PTCSU-0011  PTCSU-0012	Angle bracket W8					
	Angle bracket to be mounted inside a cable trays W3 for horizontal installation to the wall or vertical installation to the floor. Can also be mounted as a pendant bracket in the lighting trunking W70. Material: Sheet steel, Zinkpox coated white.					
	W8	80/38/45		6	7321677831241	783124
Angle bracket W8S						
Universal angle bracket to be used for various installations of pendant/fixing rail 24/34, support bracket, etc. Material: Sheet steel, Zinkpox coated white.						
	W8S	120/30/30		8	7321677831265	783126

End plugs

 P140367  P140369	End plug 28C and E					
	End plug to be mounted on pendant ends to provide protection against personal injury and to make the ends of the profiles more conspicuous. Material: PP/TPE, orange.					
	28C for Vertical piece 2 and Pendant/fixing rail 24/34	25/19/46		0.5	7321677898756	789875
	28E for Vertical piece 2F and Pendant/fixing rail 24/48	24/30/52		0.5	7321677090211	709021

Steel cable trays

Zinkpox - Corrosion class C5

Accessories							
		Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Lashing wire							
Lashing wire to be used for lashing of wires on cable ladders. Material: Stainless steel, PVC.							
P40226		HTR-2303, white PVC	Ø1.25		1.3/100 m	7321677136865	713686
P40225		HTR-2313, black PVC	Ø1.25		1.3/100 m	7321677136872	713687
Lashing wire to be used for lashing of wires on cable ladders. Material: PVC.							
P40226		HT-2304, white	Ø1.5		1.8/100 m	7321677136841	713684
P40225		HT-2314, black	Ø1.5		1.8/100 m	7321677136858	713685
Strip fixing W44							
Strip fixing to be used for easy fixation of cables in an unperforated cable tray W1/40 or W1/60. Material: PPE.							
P46804		W44	5.5/25/96		1	7321677184699	718469
Protection strip W48							
Protection strip to be used to protect cables from sharp edges when cutting the cable tray W1/W3 or lighting trunking W70. Material: Plastic.							
PTCSU-0013		W48	10/6/720		6.1	7321677872114	787211
Repair paint							
Repair paint for the repair of minor damages of powder-coated products. Colour white RAL 9003, gloss 30.							
P40450		Spray bottle, 0.4 litres	—		60	7321677397136	739713

Steel cable trays

Stainless steel - Corrosion class CX

Cable trays, perforated

0DA735902-b18



Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
Installation tray W4					
Perforated installation tray for both indoor and outdoor applications having high demands on corrosion resistance. To be used when leading cables down from a cable ladder to machine cabinets, etc. Provided with holes Ø 3.5 mm in the bottom segment of the tray for the clamping of cables with plate screws. Material: Stainless steel AISI316L.					
W4-50	15/50/3000		56	7321677834709	783470
W4-75	15/75/3000		73	7321677834716	783471
W4-100	15/100/3000		90	7321677834723	783472
W4-150	15/150/3000		119	7321677834730	783473
W4-200	15/200/3000		149	7321677834747	783474
W4-250	15/250/3000		181	7321677834754	783475
W4-300	15/300/3000		214	7321677834761	783476
W4-400	15/400/3000		279	7321677834778	783477

Joints


PTCSU-0023



Joint W2					
Side joint to be used for straight joining of installation tray W4. Material: Stainless steel AISI316L.					
W2	15/25/200		8	7321677834877	783487

Bends


784077



90° bend W4					
Horizontal 90° bend to be used for cable tray W4. To be mounted on the outside of the tray and attached in the bottom segment with screw set W34. Material: Stainless steel AISI316L.					
W4-50	16/52/-		10	7321677838844	783884
W4-75	16/77/-		15	7321677838851	783885
W4-100	16/102/-		22	7321677838868	783886
W4-150	16/152/-		37	7321677838875	783887
W4-200	16/202/-		55	7321677838882	783888
W4-250	16/252/-		77	7321677838899	783889
W4-300	16/302/-		102	7321677838905	783890
W4-400	16/402/-		161	7321677838912	783891

Vertical risers

784093



Vertical riser W4					
Vertical riser suitable for installation tray W4. To be used as internal or external riser. The riser is delivered flat and can be bent to the desired angle up to 90°. Material: Stainless steel AISI316L.					
W4-50	16/52/250		15	7321677839001	783900
W4-75	16/77/250		19	7321677839018	783901
W4-100	16/102/250		24	7321677839025	783902
W4-150	16/152/250		33	7321677839032	783903
W4-200	16/202/250		42	7321677839049	783904
W4-250	16/252/250		58	7321677839056	783905
W4-300	16/302/250		68	7321677839063	783906
W4-400	16/402/250		77	7321677839070	783907

Steel cable trays

Stainless steel - Corrosion class CX

Screws, bolts and nuts						
	Type	Dimensions A/B/C mm		Weight kg/100 m	EAN code	Ref. No.
	Screw set 22S					
	Screw set to be used for installation of Ceiling bracket 5 on Pendant/fixing rails 24/34 and 24/48, Angle bracket 5L against the back of Pendant/fixing rails, Pendant/fixing rails back to back. Set including screw MVBF 8x16 and nut M6MF8. Material: Stainless steel AISI316.					
	22S	–		1.9	7321677255825	725582
	Screw set W34					
	Screw set to be used for mounting of Angle bracket W8 onto Pendant rail W32 and for joining of W4 Installation trays. Set including screw MSCS 6x12 and nut M6MF6. Material: Stainless steel AISI316.					
	W34	10/10/16		0.8	7321677255894	725589
	Screw set W36					
	Screw set including bolt and nut M8 to be used for the mounting of single Pendant attachment W21 or on Support bracket/joint W7. Material: Stainless steel AISI316.					
	W36	M8		1.2	7321677255818	725581
	Screw set W37					
	Screw set including bolt MVBF 8x35 and nut M6MF 8, to be used for assembly of Pendant attachment W21 and Ceiling attachment W31 with Pendant rail W32, and for the joining of Pendant rail W32. Material: Stainless steel AISI316.					
	W37	M8		2.8	7321677255863	725586
	T-bolt 26U					
	T-bolt to be used for the mounting of Cantilever arm 50 on Pendant/Fixing rail 24/48 and all vertical pieces except Vertical piece 2. Material: Stainless steel AISI316.					
	26U M8x30	50/44/18		6.8	3606489579784	CSU795596
	26U M10x30	50/44/18		6.8	3606489579746	CSU795592
	26U M10x50	70/44/18		9.5	3606489579753	CSU795593
Threaded rods						
	Threaded rod B41					
	Threaded rod according to metric standard 6G. Material: Stainless steel AISI316L.					
	B41/M8	8/8/1000		63	7332227015516	1149551
		8/8/2000		63	7332227015523	1149552
	B41/M10	10/10/1000		99	7332227015615	1149561
		10/10/2000		99	7332227015622	1149562
	Joint nut M8, M10					
	Joint nut to be used to connect two lengths of threaded rods B41. Material: Stainless steel AISI316.					
	Joint nut M8	40/15/13		5.0	7321677250844	725084
	Joint nut M10	40/18.5/16		7.2	7321677248070	724807
	Flange nut B43					
	Flange nut to be mounted onto Threaded rod B41 in order to lock it to the Support hook and the Ceiling fittings. Package of 50 pcs. Material: Stainless steel AISI316L.					
	B43/M8	17/17/8		34	7332227015547	1149554
	B43/M10	20/20/15		56	7332227015646	1149564
Cantilever arms						
	Cantilever arm 50					
	Cantilever arm for mounting on walls, pendant/fixing rails or vertical pieces. Material: Stainless steel AISI316L.					
	50-100	85/40/150		24	7321677256181	725618
	50-150	85/40/200		28	7321677256198	725619
	50-200	85/40/250		34	7321677256204	725620
	50-300	105/40/350		60	7321677256228	725622
	50-400	120/50/450		118	7321677256235	725623
	50-500	140/50/550		172	7321677256242	725624
	50-600	150/50/650		215	7321677256259	725625

Steel cable trays

Stainless steel - Corrosion class CX

Vertical pieces

Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Vertical piece 2					
Vertical piece to be used with Angle bracket W8S for symmetric loading. Can be extended by using Pendant joint 2J. Material: Stainless steel AISI316L.					
2-300	279/80/135		52	7321677255573	725557
2-400	392/80/135		62	7321677255580	725558
2-500	504/80/135		72	7321677255597	725559
2-700	729/80/135		93	7321677255603	725560
2-1000	1022/80/135		120	7321677255610	725561
Vertical piece 2F					
Vertical piece to be used for installation of Cantilever arm 50. Can be joined to Pendant/fixing rail 24/48 with Pendant joint 2FJ. Material: Stainless steel AISI316L.					
2F-280	280/80/135		80	7321677255627	725562
2F-370	370/80/135		100	7321677255634	725563
2F-505	505/80/135		130	7321677255641	725564
2F-730	730/80/135		170	7321677255658	725565
2F-1000	1000/80/135		220	7321677255665	725566
2F-1500	1495/80/135		290	7321677872787	787278

Ceiling brackets

Ceiling bracket 5					
Ceiling bracket to be used for installations with Pendant/Fixing rails 24/34 and 24/48. Screw not included. Material: Stainless steel AISI316L.					
5	100/135/40		35	7321677255733	725573

Pendant/Fixing rails

Pendant/Fixing rail 24/34					
Pendant/Fixing rail for mounting of support brackets, cantilever arms, etc. Material: Stainless steel AISI316L.					
24/34	293/16/42		23	7321677255740	725574
24/34	383/16/42		31	7321677255757	725575
24/34	495/16/42		40	7321677255764	725576
24/34	698/16/42		56	7321677255771	725577
24/34	990/16/42		80	7321677255788	725578
24/34	2970/16/42		240	7321677255795	725579
Pendant/Fixing rail 24/48					
Pendant/Fixing rail for mounting of support brackets, cantilever arms, etc. Material: Stainless steel AISI316L.					
24/48	1000/26/48		175	3606481317865	CSU795566
24/48	2970/26/48		520	7321677285952	728595
24/48	5940/26/48		1120	7321677317271	731727

Steel cable trays

Stainless steel - Corrosion class CX

Pendant/Fixing rails

	Type	Dimensions A/B/C mm		Weight kg/100 pcs	EAN code	Ref. No.
Pendant bar 1						
	Pendant bar to be installed in order to reduce the deflection of heavily loaded vertical pieces. Installed with T-bolt and Expansion bolt. Material: Stainless steel AISI316L.					
	1-500	515/166/40		53	3606480911415	CSU795328
Pendant W21						
	Pendant attachment to be used in combination with pendant rail W32. Material: Stainless steel AISI316L.					
	W21	97/50/21		12	7321677255856	725585

Pendant joints

Pendant joint 2J and 2FJ						
	Pendant joint to be used for joining pendant/fixing rails and vertical pieces. Screws M8x16 and nuts included. Material: Stainless steel AISI316L.					
	2J	200/48/18		43	7321677264841	726484
	2FJ	200/55/18		46	7321677264858	726485

Angle brackets

Angle bracket W8						
	Angle bracket to be mounted inside a cable tray W4 for horizontal installation to the wall or vertical installation to the floor. Can also be mounted as a pendant bracket in the W4 installation tray. Material: Stainless steel AISI316L.					
	W8	80/38/45		6	7321677255801	725580
Angle bracket W8S						
	Universal angle bracket to be used for various installations of pendant/fixing rail 24/34, support bracket, etc. Material: Stainless steel AISI316L.					
	W8S	120/30/30		8	7321677268757	726875

End plugs

End plug 28C and E						
	End plug to be mounted on pendant ends to provide protection against personal injury and to make the ends of the profiles more conspicuous. Material: PP/TPE, orange.					
	28C for Vertical piece 2 and Pendant/fixing rail 24/34	25/19/46		0.5	7321677898756	789875
	28E for Vertical piece 2F and Pendant/fixing rail 24/48	24/30/52		0.5	7321677090211	709021

Protection strip


Protection strip W48						
	Protection strip to be used to protect cables from sharp edges when cutting the cable tray W4. Material: Plastic.					
	W48	10/6/720		6.1	7321677872114	787211

Technical information

Use and installation


Technical information

Use and installation

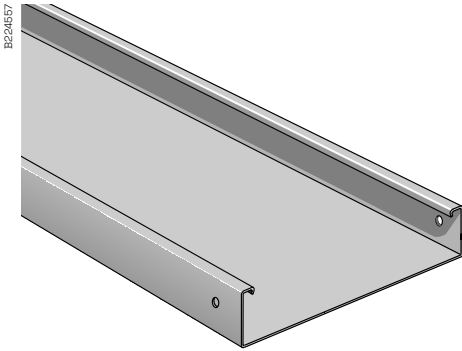

Cable tray W1/40, unperforated

Unperforated cable tray system height 40 mm. Provided with holes $\varnothing 5.8$ mm at the tray end to be used for fixation of joints.

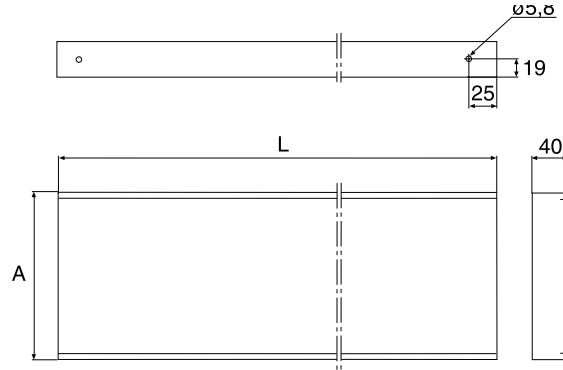



Cable tray W1 H=40 mm L=2000 mm

F1: End span, the joint position is in mid span


F2: Center span

One or more joints may be required dependent upon the product length and span.


Span 2 m

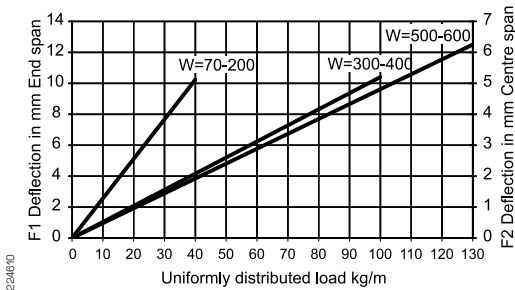

Type	A mm	L mm
Cable tray W1/40-70	70	2000
Cable tray W1/40-100	100	2000
Cable tray W1/40-200	200	2000
Cable tray W1/40-300	300	2000
Cable tray W1/40-400	400	2000
Cable tray W1/40-500	500	2000
Cable tray W1/40-600	600	2000
Cable tray W1/40-500 FS	500	2000
Cable tray W1/40-600 FS	600	2000
Cable tray W1/40-70	70	3000
Cable tray W1/40-100	100	3000
Cable tray W1/40-200	200	3000
Cable tray W1/40-300	300	3000
Cable tray W1/40-400	400	3000
Cable tray W1/40-500	500	3000
Cable tray W1/40-600	600	3000




Cable tray W1/40 is joined with 2 Side joints W49/40 or Support bracket/joint W7/40.



For trays 300 mm and wider we recommend to use Support bracket/joint W7/40.


Technical information

Use and installation

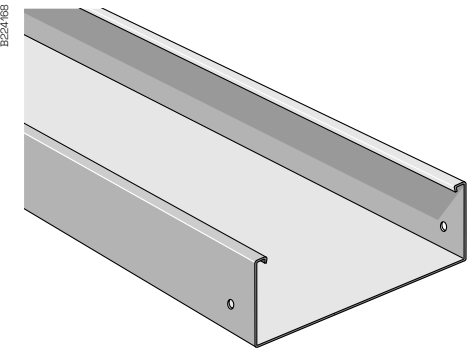

Cable tray W1/60, unperforated

Unperforated cable tray system height 60 mm. Provided with holes Ø5.8 mm at the tray end to be used for fixation of joints.

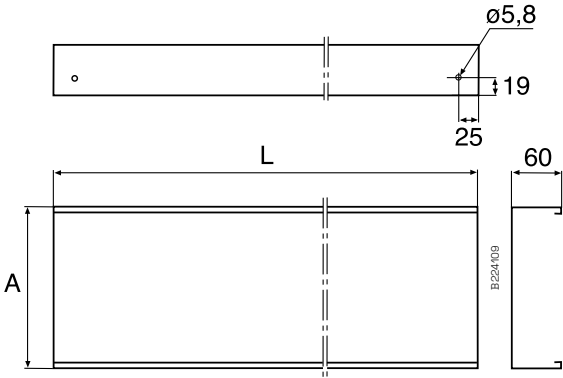


Cable tray W1 H=60 mm L=2000 mm

F1: End span, the joint position is in mid span


F2: Center span

One or more joints may be required dependent upon the product length and span.


Span 2 m

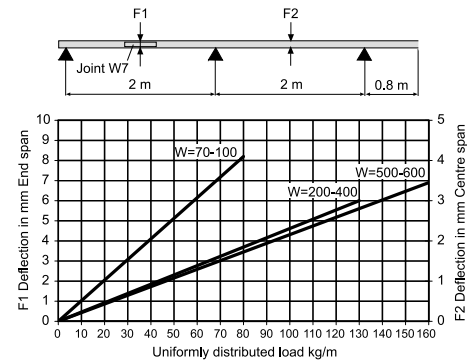

Type	A mm	L mm
Cable tray W1/60-70	70	2000
Cable tray W1/60-100	100	2000
Cable tray W1/60-200	200	2000
Cable tray W1/60-300	300	2000
Cable tray W1/60-400	400	2000
Cable tray W1/60-500	500	2000
Cable tray W1/60-600	600	2000
Cable tray W1/60-500 FS	500	2000
Cable tray W1/60-600 FS	600	2000




Cable tray W1/60 is joined with 2 Side joints W49/60 or Support bracket/joint W7/60.



For trays 300 mm and wider we recommend to use Support bracket/joint W7/60.


Technical information

Use and installation




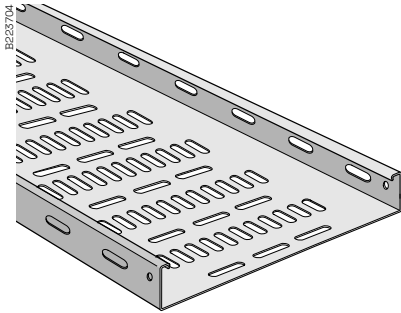


Cable tray W3/40, perforated

Perforated cable tray system height 40 mm. Provided with holes $\varnothing 5.8$ mm at the tray end to be used for fixation of joints. Oval holes along the lateral side of the tray can be used for mounting of accessories.

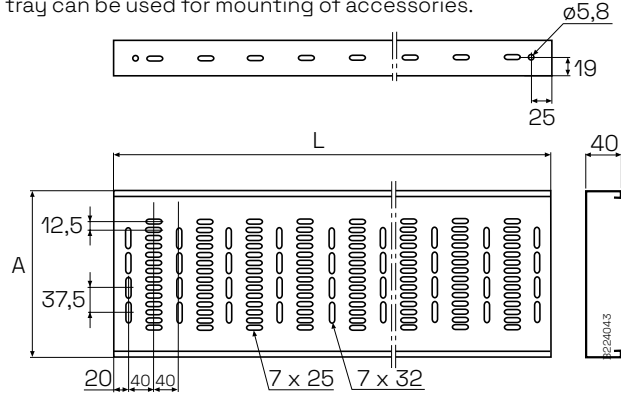


Type	A mm	L mm
Cable tray W3/40-50	50	3000
Cable tray W3/40-70	70	3000
Cable tray W3/40-100	100	3000
Cable tray W3/40-150	150	3000
Cable tray W3/40-200	200	3000
Cable tray W3/40-300	300	3000
Cable tray W3/40-400	400	3000
Cable tray W3/40-500	500	3000
Cable tray W3/40-600	600	3000

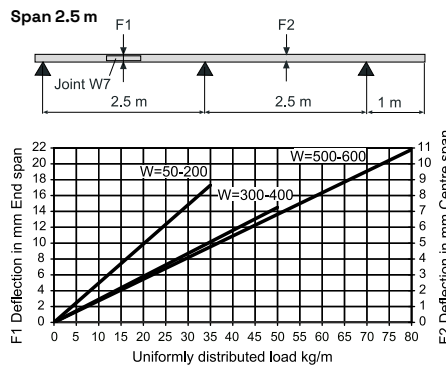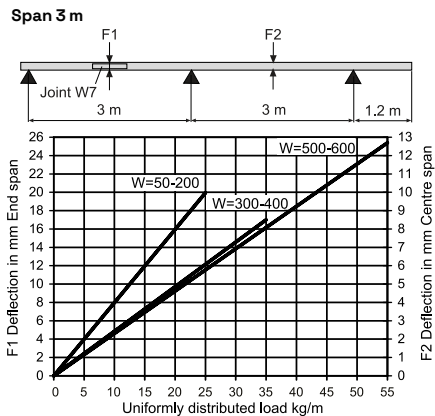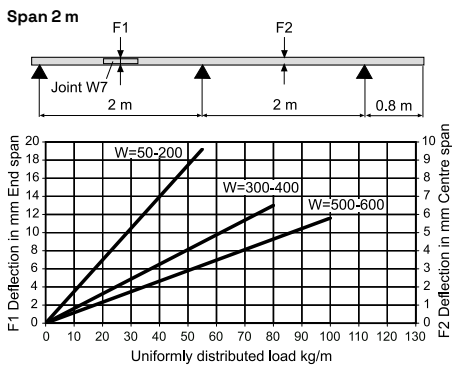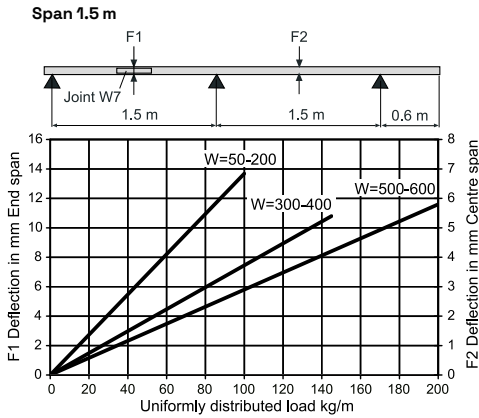


The cable trays are tested according to IEC 61537:

**Cable tray W3 H=40mm
L=3000mm**


F1: End span, the joint position is in mid span
F2: Center span
One or more joints may be required dependent upon the product length and span.



Cable tray W3/40 is joined with 2 Side joints W49/40 or Support bracket/joint W7/40.




For Pre-galvanized trays 300 mm and wider we recommend to use Support bracket/joint W7/40.



For Hot dip galvanized trays 300 mm and wider we recommend to use Joint W7/40.


Technical information

Use and installation

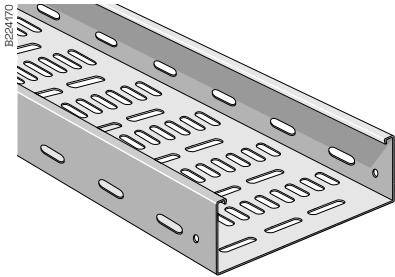

Cable tray W3/60, perforated


Perforated cable tray system height 60 mm. Provided with holes Ø 5.8 mm at the tray end to be used for fixation of joints. Oval holes along the lateral side of the tray can be used for mounting of accessories.

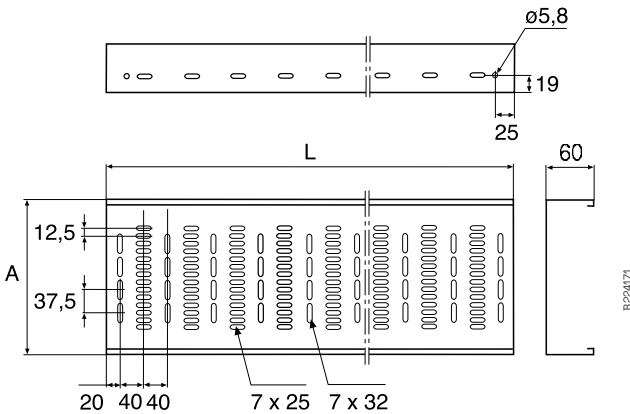


Cable tray W3 H=60 mm L=3000 mm

F1: End span, the joint position is in mid span
F2: Center span
One or more joints may be required dependent upon the product length and span.


Span 2 m

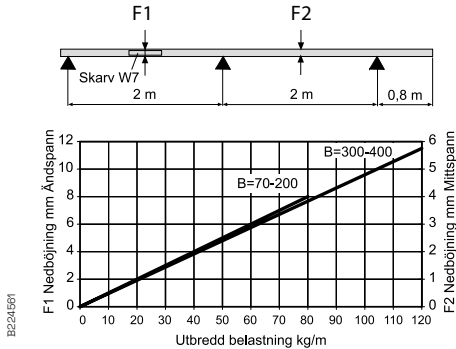

Type	A mm	L mm
Cable tray W3/60-70	70	3000
Cable tray W3/60-100	100	3000
Cable tray W3/60-150	150	3000
Cable tray W3/60-200	200	3000
Cable tray W3/60-300	300	3000
Cable tray W3/60-400	400	3000
Cable tray W3/60-500	500	3000
Cable tray W3/60-600	600	3000




Cable tray W1/60 is joined with 2 Side joints W49/60 or Support bracket/joint W7/60.



For trays 300 mm and wider we recommend to use Support bracket/joint W7/60.



Technical information

Use and installation

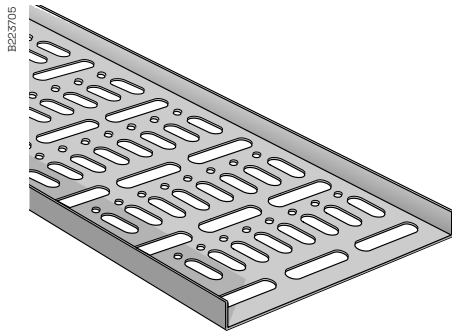

Installation tray W4


Perforated installation tray. To be used when leading cables down from a cable ladder to machine cabinets, etc. Provided with holes $\varnothing 3.5$ mm in the bottom segment of the tray for the clamping of cables with plate screws.

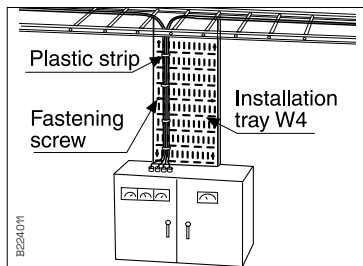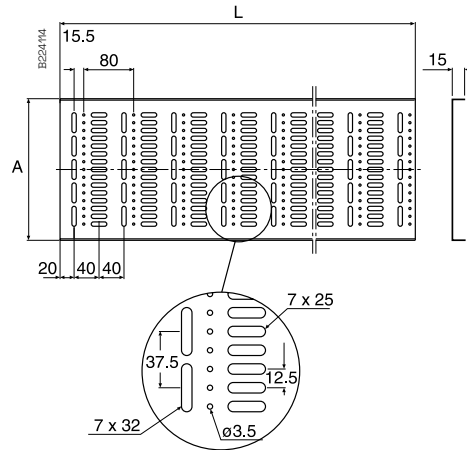

Type	L mm	A m
W4-50	1960 3000	50
W4-75	1960 3000	75
W4-100	1960 3000	100
W4-150	1960 3000	150
W4-200	1960 3000	200
W4-250	1960 3000	250
W4-300	1960 3000	300
W4-400	1960 3000	400

Technical information


Use and installation



P/55002

Lighting trunking W70

Cable tray with bottom perforation. System height 40 mm, length 3000 mm. Oval holes 9x6 mm on the lateral sides of the tray end can be used for fixation of joints. The oval hole pattern at the base of the tray can be used for mounting of lighting fixtures. On every 500 mm an oval hole is placed to easily guide fast connectors into the tray. In the wider trays with widths from 70 to 200 the hole is turned 45°.


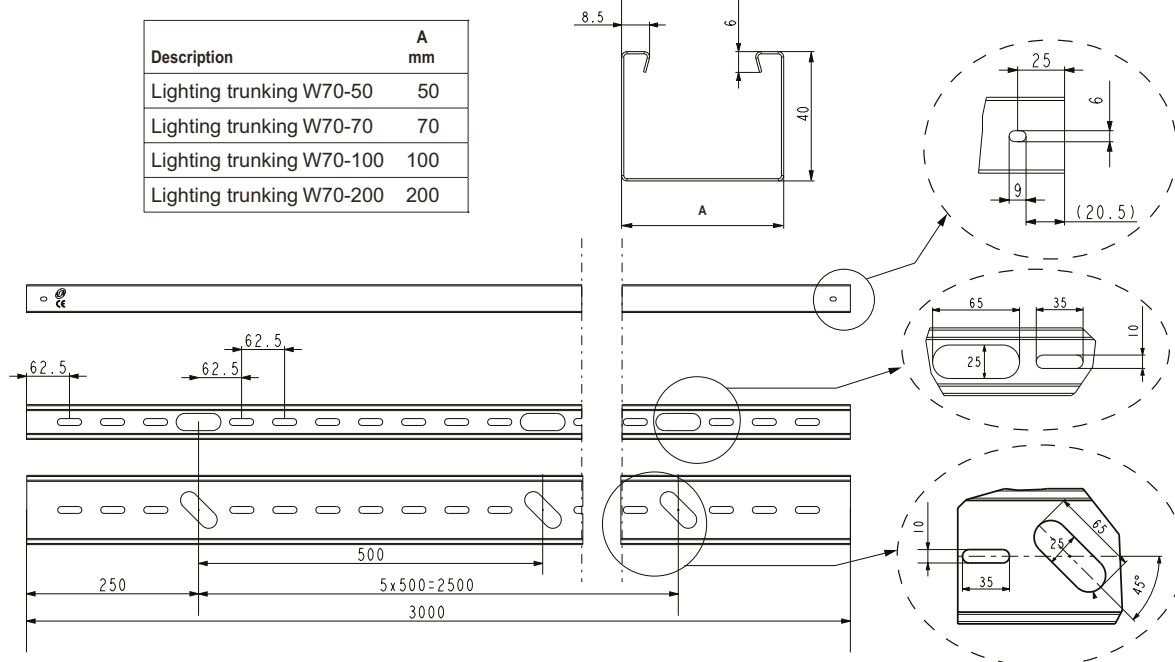


Loading capacity

Load test executed according to IEC 61537

F1 represent deflection in section with joint


F2 represent deflection in section without joint

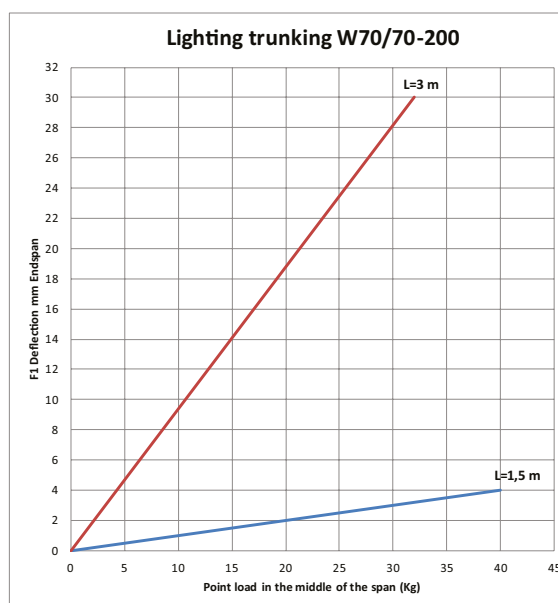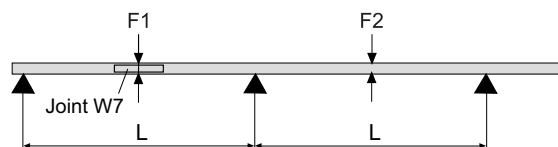

Breaking load for Joint W7/40-70 = 120 kg


Technical information

Use and installation




Cover W5


Cover to be used to protect the cables inside the cable tray against damages, dust, liquids, UV-influence, etc.

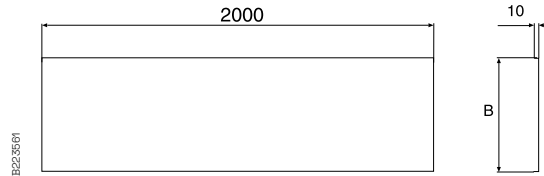


Type	B mm
Cover W5 - 70	71
Cover W5 - 100	101
Cover W5 - 150	151
Cover W5 - 200	201
Cover W5 - 300	301
Cover W5 - 400	401
Cover W5 - 500	501
Cover W5 - 600	601



Used for screening of control cables and in dusty and dirty premises.




Covers must be mounted on cable trays with Cover clamp W62.




Cover clamp W62

Used for fixing covers on Trays W1 and W3 as well as on Lighting trunking W70.



Cover clamp W62 is used for fixing the covers on Cable tray W1 and W3 as well as on Lighting trunking W70/71.




Start by pressing the Cover clamp W62 over the sides of the cover. Then snap the cover over the folded edges of the tray. 6 Cover clamps W62 are needed per cover.

Technical information

Use and installation - CLX³ Click suspension

P14B210

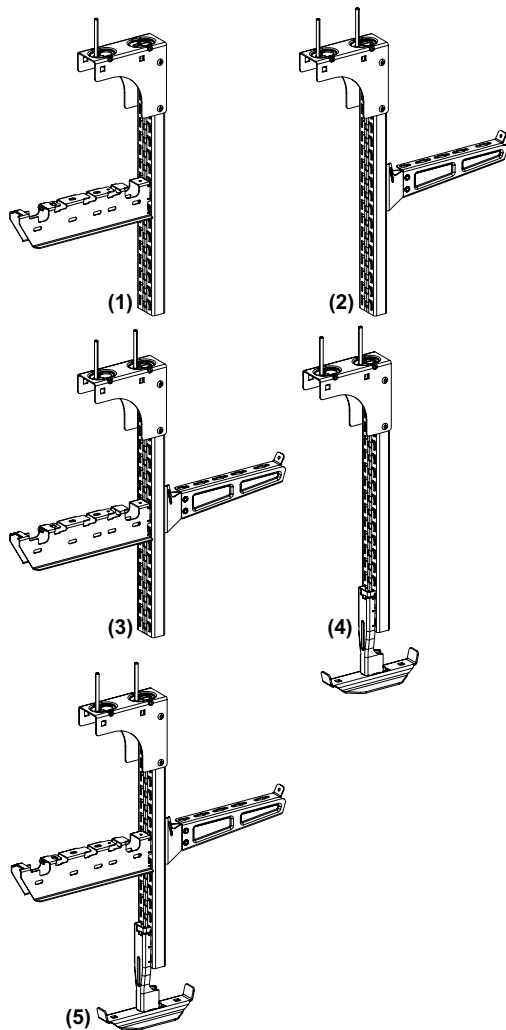

CLX³ General information

Standards

CLX³ installation system is tested and following the classification according to the IEC 61537.

Usage of gloves

According to IEC 61537 it is always recommended to use protective gloves when handling and manipulating cable support systems.

Handling and storage




- Store in dry and covered places.
- Avoid moisture and pollutants.
- Do not remove the packing until installation.
- Take care when storing and handling so that the CLX³ components are well protected from damage.

CLX³ Pendant loading configurations

CLX³ pendant is primarily designed for installation of the CLX³ support system, but can also be used for T-bolt installation.

The system can be installed in different configurations:

- b Click direction (1): the cantilever and the ceiling plate are in the same direction
- b T-bolt direction (2): a cantilever is fixed with a T-bolt to the rail, in the opposite direction of the ceiling plate
- b T installation (3): combination of the first 2 installations
- b Central suspension (4): the pendant is completed by a central suspension bracket
- b T and central suspension (5).



Fixation to the ceiling

Keyhole design

Keyhole design is facilitating easy mounting of the pendant to the ceiling by allowing the bolts to be pre-fixed before finally placing the pendant and tightening the bolts.

For concrete ceiling, use bolts type IMT38051.

For other bolts where bolthead is < 16 mm use washer u 16 mm.

One bolt fixation

For click direction installation of CLX³ Cantilever arm (1), use a single bolt, in the outer hole position on the ceiling plate.

Two bolt fixation

For T-bolt suspension, central suspension, T installation and T and central suspension installation (2), (3), (4), (5), always fix the ceiling plate to the ceiling using 2 bolts.

Use the angle adaptor when the ceiling is not horizontal to level out the suspended pendant.

Technical information


Use and installation - CLX³ Click suspension

Pendant load calculation

To verify that the load applied to each pendant is within performance, it is necessary to calculate and consolidate the total **tensile load force** and the total **moment-force** on each pendant and for each cantilever and after that compare the calculated values with the defined loading limitations to ensure a safe installation.

Total tensile force **Ft** calculation method

This is calculated as the sum of all forces applied to the pendant from the weight of cables on the length material.

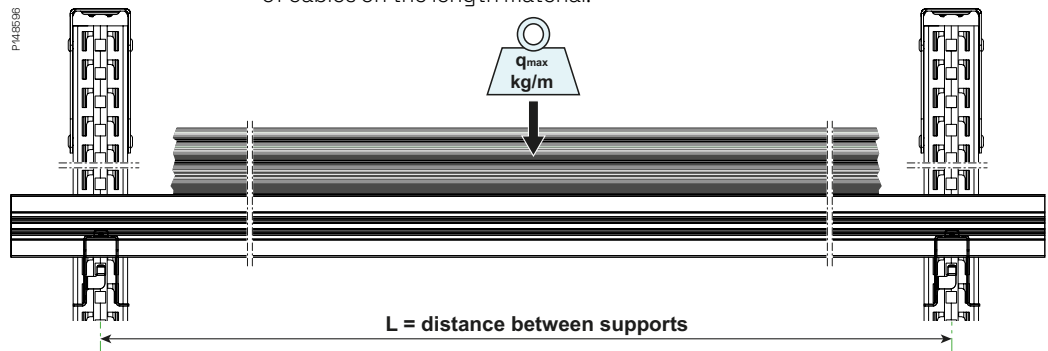

Ft (total load in N) = **L** (span or supports distance in meters) x **q_{max}** (load in kg/m) x 10.

In case of several layers are installed on the pendant then the sum of the **Ft** tensile load from all layers shall be calculated.

Total momentum force **Mt** calculation method

This is calculated as the sum of all the torsion forces applied to the pendant from the weight of cables on the length material and the offset distance created by the cantilever arm.


Mt (momentum in N.m) = **Ft** (N) x **d** (distance between axis center and point load in meters)

“d” depends of the position of the length material on the cantilever arm.

The distance **d** can be different depending on installation method.

When the length material is installed on the full width of the cantilever, use **d1**.

For length material that are installed at the outer end of the arm, use **d2**.

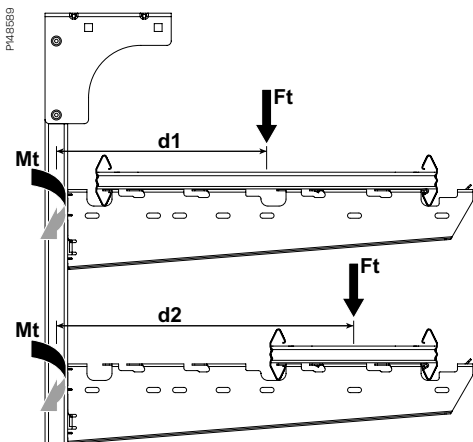

Model	PG	d1 (m)	d2 (m)
CLX ³ cantilever arm 100	CSU795645	0.09	Na
CLX ³ cantilever arm 150	CSU795646	0.110	
CLX ³ cantilever arm 200	CSU795647	0.140	
CLX ³ cantilever arm 300	CSU795648	0.190	
CLX ³ cantilever arm 400	CSU795649	0.240	0.340
CLX ³ cantilever arm 500	CSU795650	0.290	0.440
CLX ³ cantilever arm 600	CSU795651	0.340	0.490




In case of several layers are installed on the pendant then the sum of the **Mt** momentum force from all layers shall be calculated.



Ensure that the installation is designed so that ΣMt and ΣFt are under the limits.

Technical information

Use and installation - CLX³ Click suspension

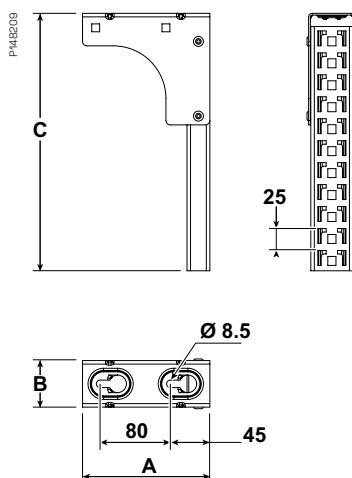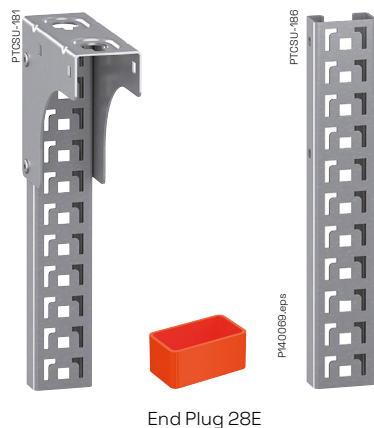

CLX³ Pendant 24/48

Vertical piece with a perforated pattern to be used for installation of CLX³ cantilever arms or CLX³ central suspension adapter. The open side of the rail can be used for installation of cantilever arms and brackets together with T-bolt. Can be joined to CLX³ Rail 24/48 with pendant joint 2FJ.

Model	PG	High (mm) A	Width (mm) B	Length (mm) C
CLX ³ pendant				
CLX ³ pendant 24/48 300 mm PG	CSU795632	145	53	295
CLX ³ pendant 24/48 400 mm PG	CSU795633			395
CLX ³ pendant 24/48 500 mm PG	CSU795634			495
CLX ³ pendant 24/48 700 mm PG	CSU795635			695
CLX ³ pendant 24/48 1000 mm PG	CSU795636			995
CLX ³ pendant 24/48 1500 mm PG	CSU795638			1495
CLX ³ rail				
CLX ³ rail 24/48 300 mm PG	CSU795640	26	48	280
CLX ³ rail 24/48 1000 mm PG	CSU795641			980
CLX ³ rail 24/48 3000 mm PG	CSU795637			2980

Pendants Safe Working Load (SWL)

SWL for bending moment of the pendant **M_t**.

Model	PG	Moment (N.m) Click side	Deflection (mm)
CLX ³ pendant 24/48 300 mm PG	CSU795632	235	2
CLX ³ pendant 24/48 400 mm PG	CSU795633		4
CLX ³ pendant 24/48 500 mm PG	CSU795634		7
CLX ³ pendant 24/48 700 mm PG	CSU795635		15
CLX ³ pendant 24/48 1000 mm PG	CSU795636		30
CLX ³ pendant 24/48 1500 mm PG	CSU795638	200	30

Tested according to IEC 61537 standard.

SWL bending moment for Adjustable ceiling plate **M_t**.

Model	PG	Moment (N.m) Click side
CLX ³ adjustable ceiling plate	CSU795639	235

SWL pendant tensile strength **F_t**.

Model	PG	Tensile load SWL (N) 1 bolt CLX ³	Tensile load SWL (N) 2 bolts CLX ³
CLX ³ pendant 24/48 300 mm PG	CSU795632	2000	5000
CLX ³ pendant 24/48 400 mm PG	CSU795633		
CLX ³ pendant 24/48 500 mm PG	CSU795634		
CLX ³ pendant 24/48 700 mm PG	CSU795635		
CLX ³ pendant 24/48 1000 mm PG	CSU795636		
CLX ³ pendant 24/48 1500 mm PG	CSU795638		

Technical information

Use and installation - CLX³ Click suspension

Pendant limits, torque and deflection

In the diagram below it is possible to check if ΣMt is below the momentum limitation of the pendant (end of line). It is also possible to see the deflection on the pendant at max ΣMt and all values below.

Calculation example


For a cantilever size 600, full size ladder installation, 3 m span, load of 23 kg/m on a 1000 mm pendant.

1) ΣF : 3 m (span) $\times$ 23 kg/m (load) $\times$ 10 = 690 N will be the load for each pendant system.

2) ΣMt : 690 (N) $\times$ 0.34 (m) = 234 N.m.

ΣF = 690 N $\leq$ 2000 N and ΣMt = 234 Nm $\leq$ 235 N.m.

3) Drawing of the lines on the graph: for 234 N.m, the deflexion on the pendant is **30 mm**.

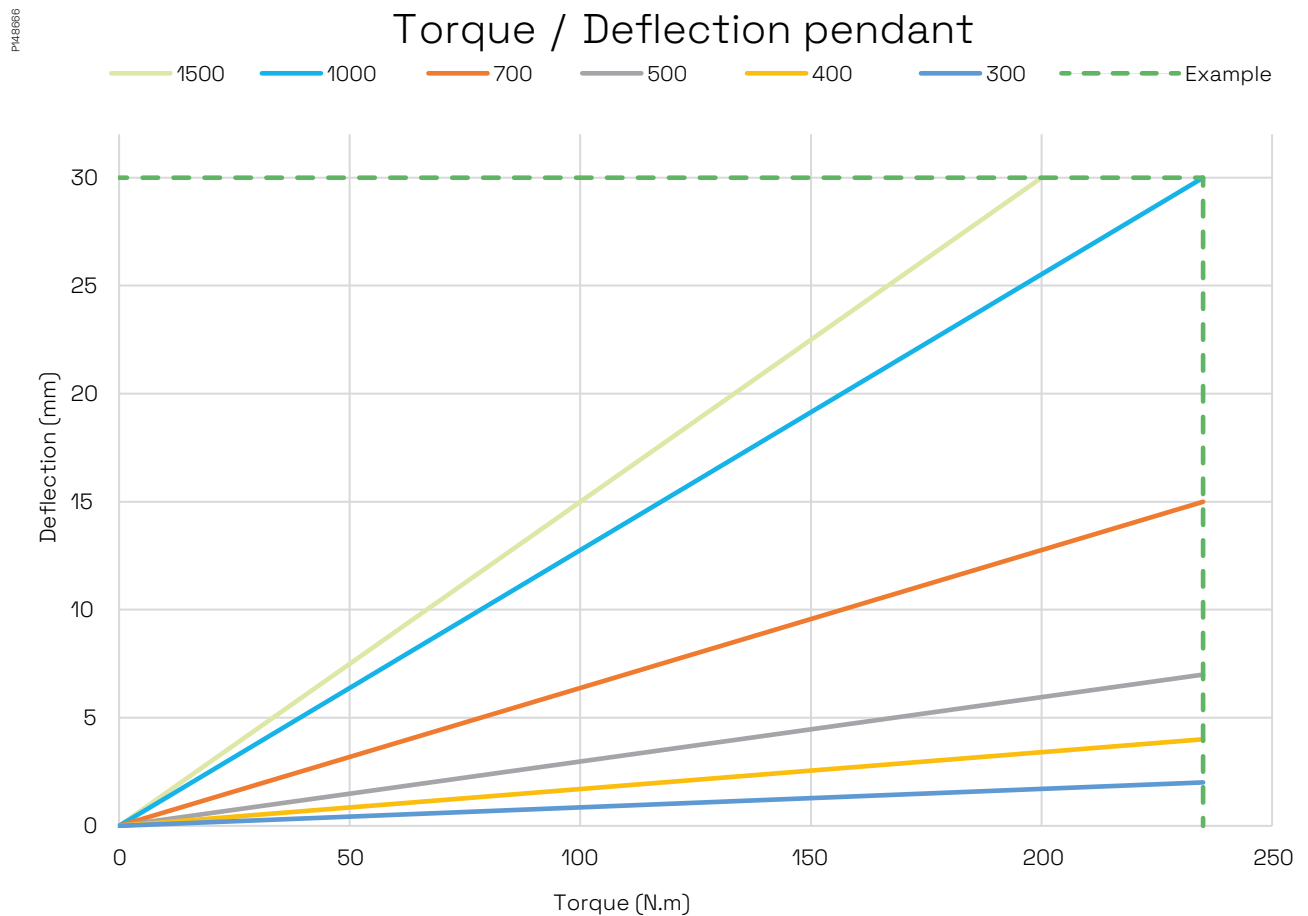



Technical information

Use and installation - CLX³ Click suspension

Distance between rails and offset

CLX³ rail have a pitch between the patterns of 25 mm.

The support distance between the pendants should be at least than 1.5 m. If the length material can't be installed on the exact same level, the length material should be installed on the closest offset- pitch and never at more than 12.5 mm vertically from the previous pattern.

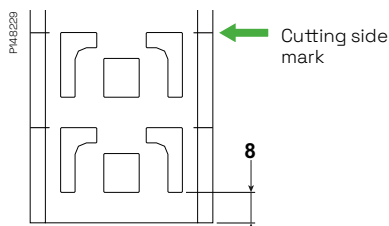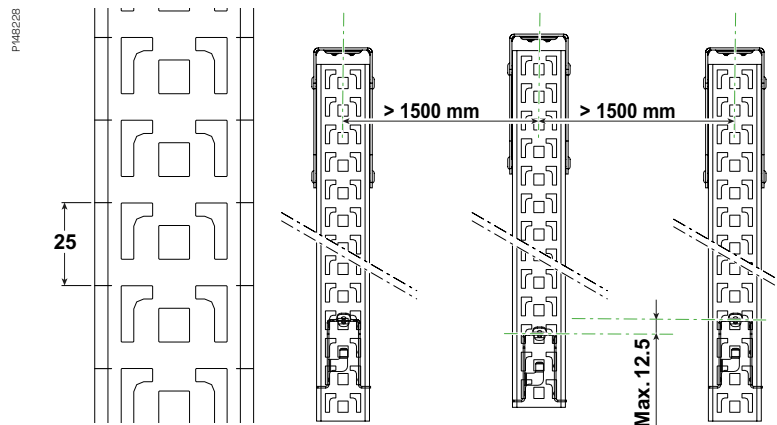


Cutting of the pendant or rail

Cutting of the rail or the pendant should be made at 8 mm under the last pattern needed, as the side marks are showing. This to assure that there is enough material below the bottom pattern to secure proper fixation of the cantilever arm.

Installation of the rail joint

CLX³ rails can be joined together with pendant joint 2FJ.

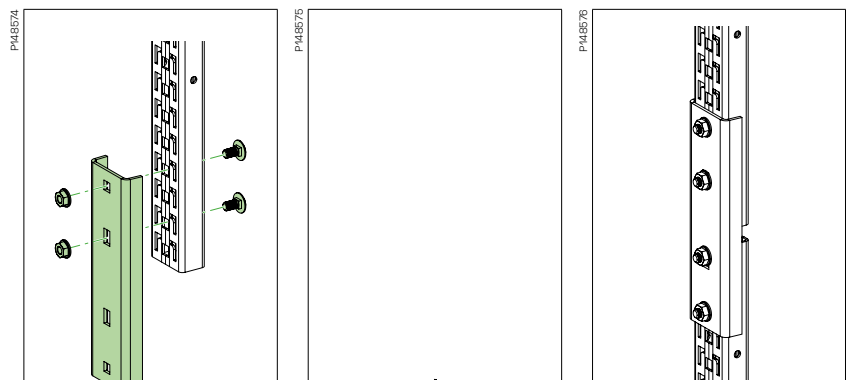

Place the joint on the rail in place, make sure the 2 top holes are in front of slots to install the included bolts and nuts.

Install the second rail as high as possible and install the other bolts and nuts.

Torque of the nuts
11 N.m.

Note: extending the pendant with the rail joint will decrease the load capacity of the pendant. For SWL information when extending the pendants, contact Technical support.

Technical information

Use and installation - CLX³ Click suspension


PTCSU-487




CLX³ Adjustable ceiling plate

Adjustable ceiling plate is used together with CLX³ pendant to allow for angle correction up to 25°. The adjustable ceiling plate is fixed to the CLX³ pendant with 4 screw set 22S to be ordered separately. The pendant can be fixed to the adjustable ceiling plate in both possible directions (1) and (2).


Model	PG	High (mm) A	Width (mm) B	Length (mm) C
CLX ³ adjustable ceiling plate PG	CSU795639	100	59	150

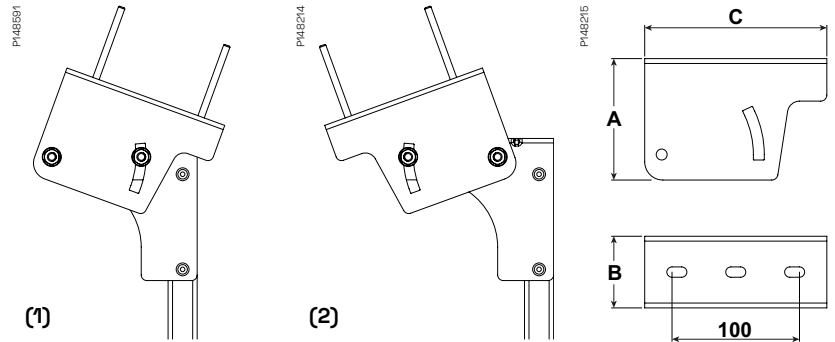



Installation of the adjustable ceiling plate

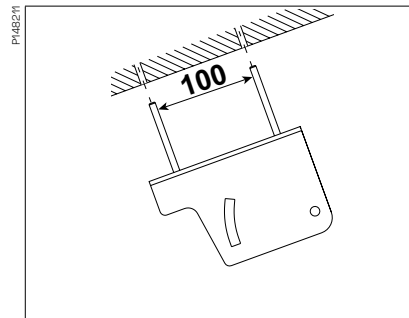

Fix the adjustable ceiling plate to the ceiling with 2 bolts. (c-c: 100 mm).

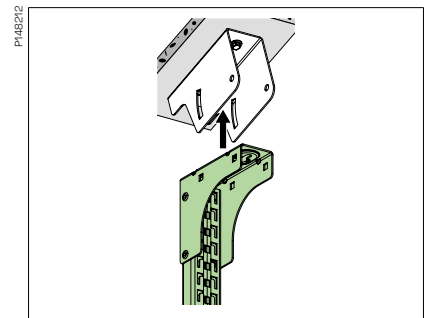

Insert the pendant into the adjustable ceiling plate.

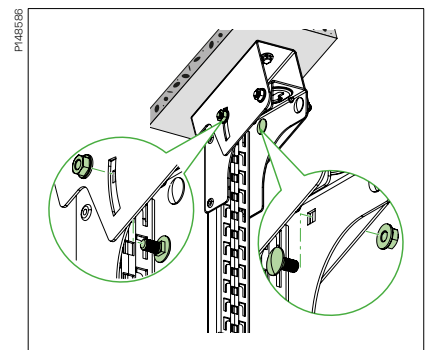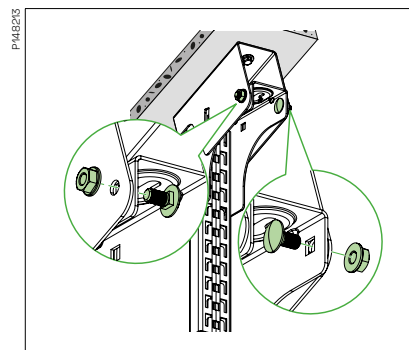

Fix the pendant to the adjustable ceiling plate with 4 bolt sets 22S and align the pendant to the vertical plane before tightening the bolts.

Recommended torque 20 N.m.

Technical information


Use and installation - CLX³ Click suspension



CLX³ Central suspension adapter

The CLX³ central suspension adapter is clicked together with the central suspension brackets to create a central suspension piece that can be clicked to the rail or pendant.

Model	PG	High (mm) A	Width (mm) B	Length (mm) C
CLX ³ Central suspension adapter PG	CSU795700	166	31	39

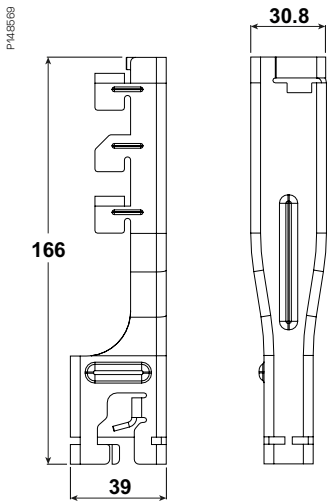

Technical information

Use and installation - CLX³ Click suspension

PTCSU-405




CLX³ Cable tray H40 central suspension

Bracket to be used for central suspension of Wibe cable trays, height 40.

The bracket shall be used together with the CLX³ central suspension adapter.


Model	PG	High mm A	Width mm B	Length mm C
CLX ³ Tray H40 central suspension 70 PG	CSU795653	152	37	66
CLX ³ Tray H40 central suspension 100 PG	CSU795654	152	37	96

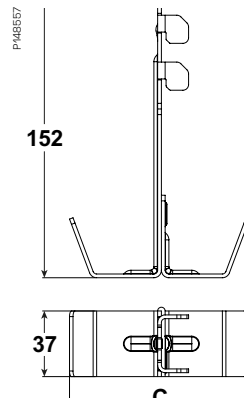

PTCSU-407



Model	PG	High mm A	Width mm B	Length mm C
CLX ³ Tray H40 central suspension bracket 200 PG	CSU795660	36	76	196
CLX ³ Tray H40 central suspension bracket 300 PG	CSU795661	36	76	296
CLX ³ Tray H40 central suspension bracket 400 PG	CSU795662	36	76	396
CLX ³ Tray H40 central suspension bracket 500 PG	CSU795663	36	76	496
CLX ³ Tray H40 central suspension bracket 600 PG	CSU795664	36	76	596





Tray H40 central suspension bracket	SWL symmetric load (N)
70	1000
100	800
200	1500
300	1500
400	1500
500	1250
600	1200

Technical information


Use and installation - CLX³ Click suspension

Installation of adaptor to central suspension brackets



The CLX³ central suspension bracket is installed without tools by clicking it to the central suspension. The method is the same for Central suspension bracket ladder -mesh or -tray. In the illustration below, the CSB for ladder is used.

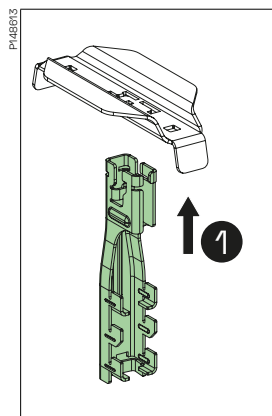

1 Insert the adaptor in the pattern on the central suspension bracket.

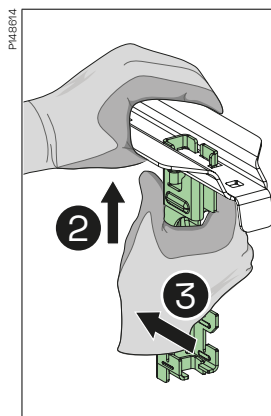


2 Press the pieces together and **3** slide the adaptor until the click lip of the adaptor pass over the locking lip of the central suspension bracket with a **4** click.

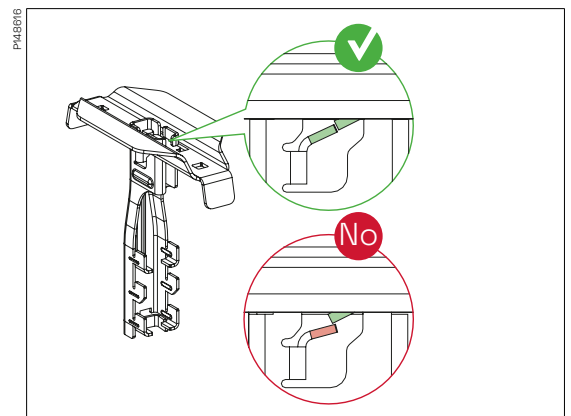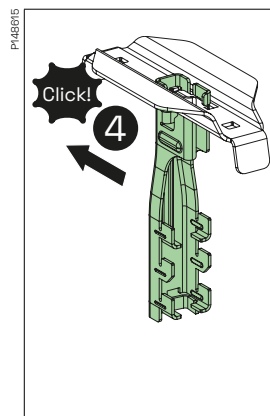


Visually check and secure that the adaptor is properly positioned, and the click lip has overpassed the locking lip.

Installation of central suspension adapters to the CLX³ rail


The CLX³ central suspension adapters is installed to the rail without tools, by clicking. To ensure proper installation a hooks must be inserted in the rail:

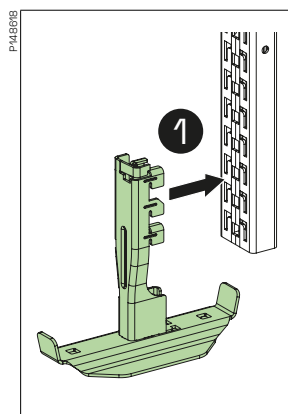


1 Push the central suspension piece until the hooks are fully inserted in the pattern and the surface touches the rail.

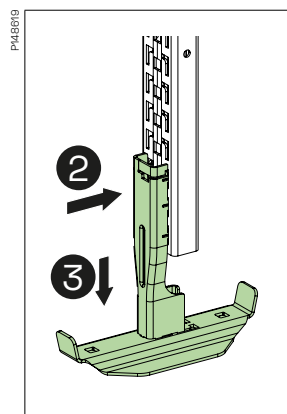

2 Press towards the rail and **3** pull down until the click lip.

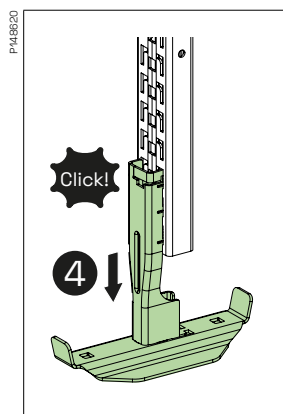

4 Pass inside the slot in the rail.

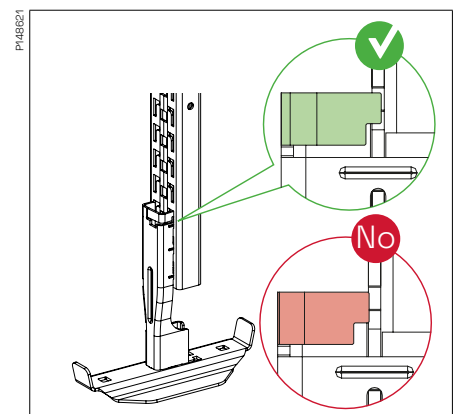

Visually check and secure that the adaptor is properly positioned, and the click lip is properly positioned inside of the slot of the CLX³ rail.




Apply caution with unintended upward movements as it can cause the adaptor to unlock and therefore be released from the rail

Technical information


Use and installation - CLX³ Click suspension

Uninstallation of adapter from the CLX³ rail


CLX³ central suspension adapters can be removed, by using a flat screwdriver.

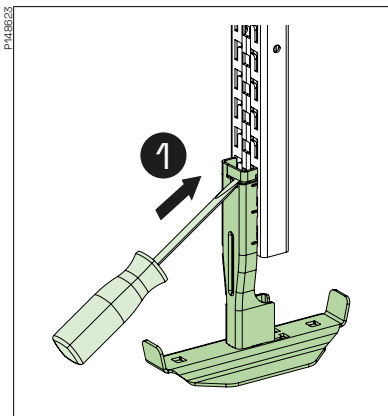

1 Fit the screwdriver's head in the slot of the adapter.

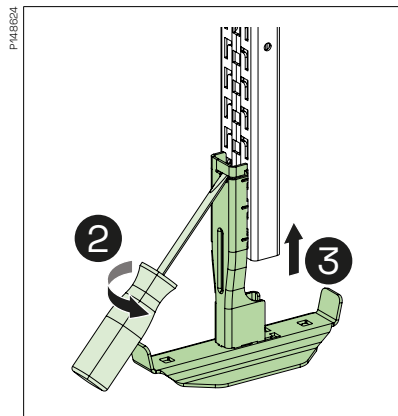


Use the screwdriver as a lever to **2** gently release the click lip from the rail. Then **3** push the adaptor up to release the L hooks from the rail.

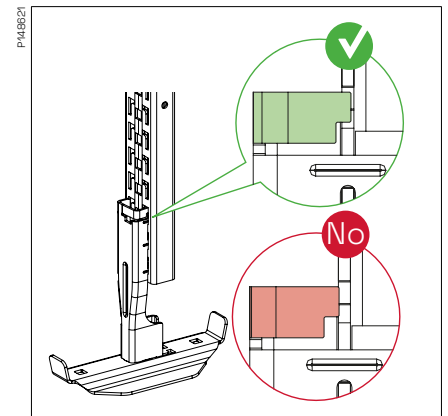


If the adapter needs to be reinstalled, correct the click lip to the initial position and make sure the click lip is locking properly.

Uninstallation of adaptor from central suspension brackets


CLX³ central suspension brackets can be removed, by using a flat screwdriver.

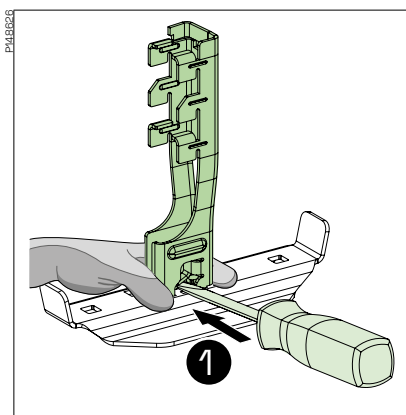

1 Hold the bracket, fit the screwdriver's head between the adaptor lip and the bracket.

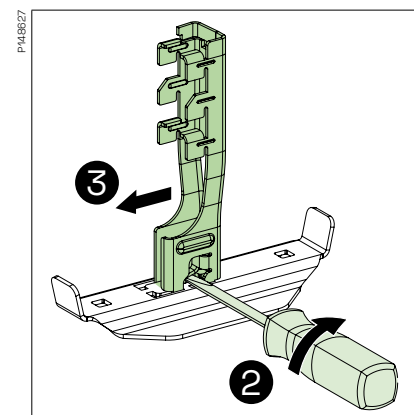

2 Twist the screwdriver to use it as a lever on the click lip until it passes over the bracket's locking lip and **3** pull the adaptor sideways to release it.

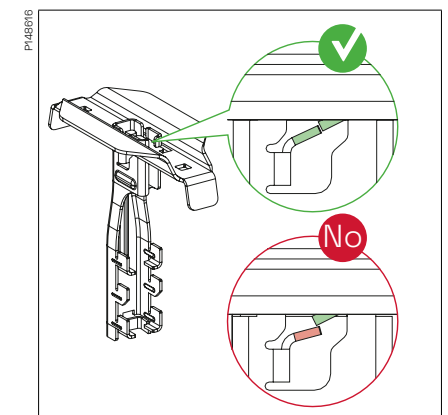

When the bracket needs to be reinstalled, correct the click lip to the initial position and make sure the click lip is locking properly.


Technical information

Use and installation - CLX³ Click suspension



Installation of Wibe H40 cable trays on central suspension bracket


CLX³ central suspension bracket for Wibe cable tray H40, 70 and 100 width is installed to the rail without tools, by clicking.

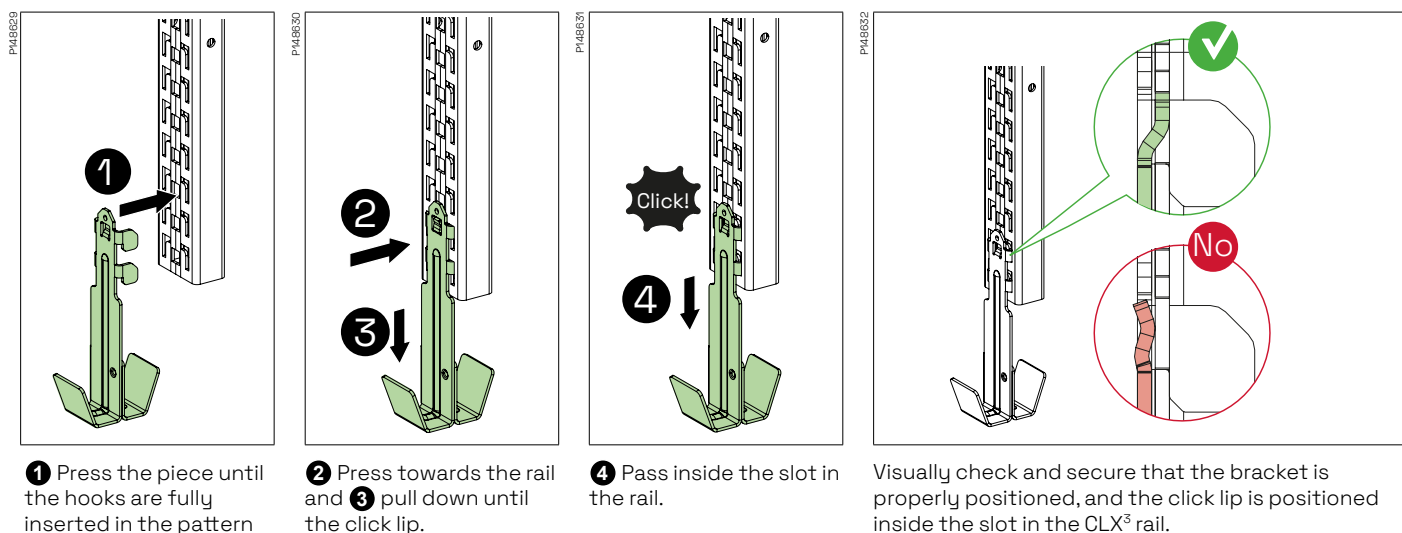

Apply caution with unintended upward movements as it can cause the bracket to unlock and therefore be released from the rail


Uninstallation of Wibe H40 central suspension bracket from the CLX³ rail

CLX³ central suspension brackets can be removed, by using a flat screwdriver.

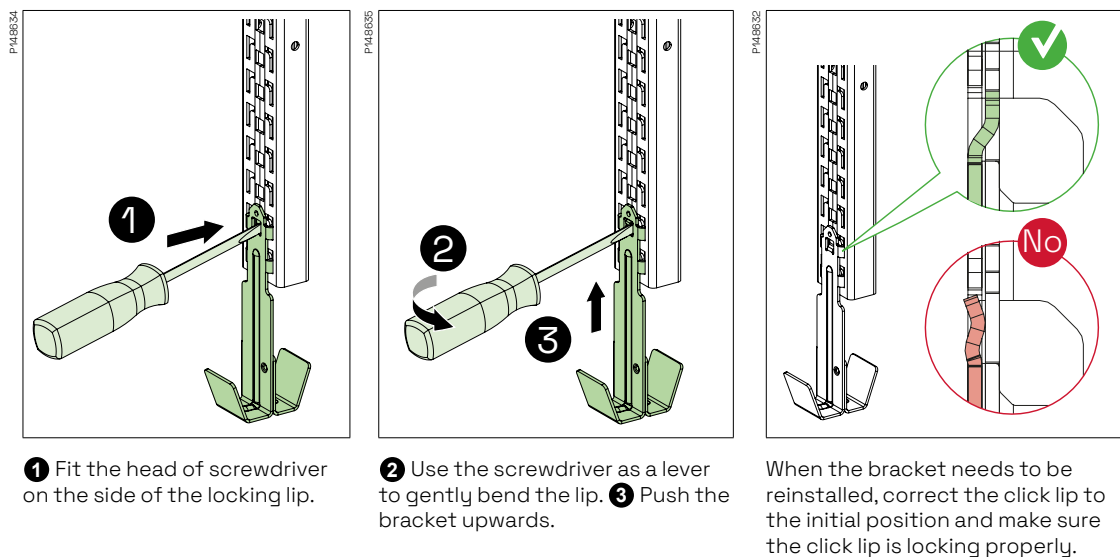


Technical information

Use and installation - CLX³ Click suspension




Installation of Wibe H40 cable trays on central suspension bracket


CLX³ brackets are made to fix Wibe cable trays without tool.

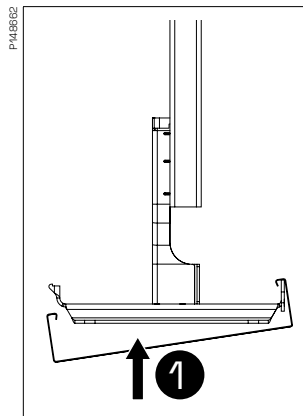

❶ Insert one flange of the tray on the flat lip of the bracket.

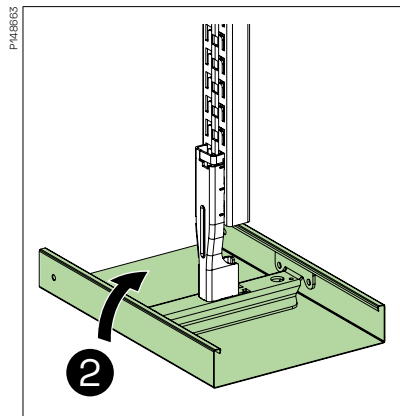

Pull up the other side and ❷ snap the tray on the other lip.

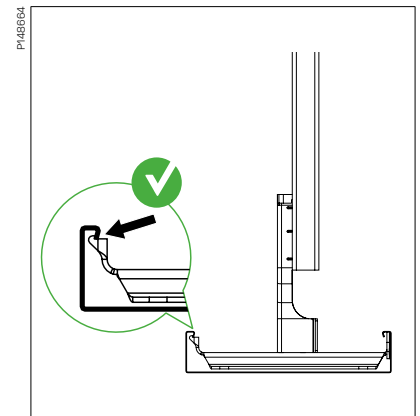


For safety, check if the tray is secured inside the bracket lips.



Apply caution with unintended upward movements as it can cause the tray to unlock and therefore be released from the bracket

Uninstallation of Wibe H40 cable tray from central suspension bracket


Wibe cable trays can be remove from the bracket.

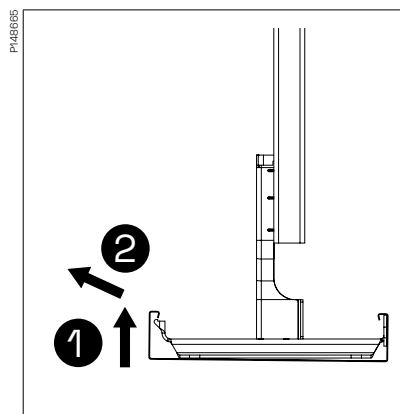

❶ Push the cable tray up on the claw side. ❷ Pull the cable tray lip out of the bracket.



Technical information

Use and installation

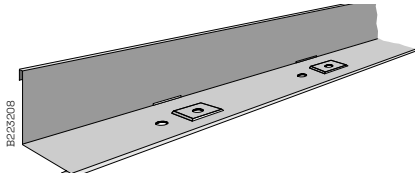


Dividing strip 39


Dividing strip to be used to separate low-tension and high-tension cables.

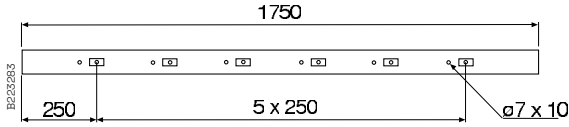

Type	H mm
Dividing strip 39/24	24
Dividing strip 39/55	55





Used to separate tray or trunking in two or more ducts thereby separating control cables from other cables and pipes. The hole structure at distances of 250 mm permits two fixing opportunities with Support bands W6 even after cutting.

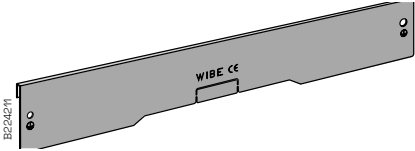

Insert piece W39/55


Insert piece to be used to join Dividing strips 39/55 in Cable trays W1/60 or W3/60. The insert piece can be positioned on Support bracket/joint W7/60 to ensure a continuous separation of cables inside the cable tray.



Insert piece W39/55 is used to join Dividing strips 39/55 and is mounted on Support bracket/joint W7/60.



Technical information

Use and installation




Insert piece W39

Insert piece to be used to join Dividing strips 39/24 in cable tray W1/W3 and lighting trunking W70/71. The Insert piece can be positioned on Support bracket/joint W7/40 to ensure a continuous separation of cables inside the cable tray.


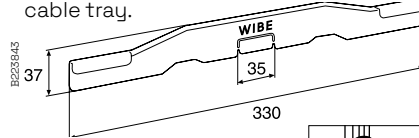


Insert piece W39 is used to join Dividing strips W39 and is mounted on Support bracket/joint W7 or Internal cantilever arm W17/40. When mounting over Internal cantilever arm W17/40, break away plastic bit from component.

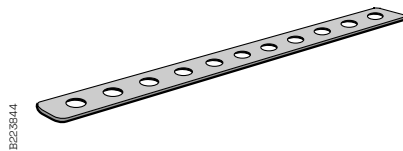

Support band W6

Support band to be placed inside cable trays to fix the lateral position of one or several Dividing strips W39. The holes in the support band and the locking pins in Dividing strip W39 enable an adjustment of the lateral positioning of the dividing strip with an interval of 25 mm.




Support band W6 is mounted to fix one or more Dividing strips 39 laterally. The holes in the support band and the locking pins in Dividing strip 39 allow for a fixed division with intervals of 25 mm.


Type	L mm
Support band W6-70	67
Support band W6-100	97
Support band W6-200	197
Support band W6-300	297
Support band W6-400	397
Support band W6-500	497
Support band W6-600	597

Technical information

Use and installation




W7/40-
70,100,200,300,400




W7/40-
50,150,500,600

Support bracket/joint W7/40


To be used as a support bracket or joint for cable tray W1/40, W3/40 and for lighting trunking W70. When joining cable tray W1/40 FS (reinforced), side joint W49/40 must be used.

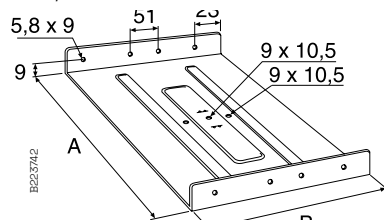


Type	A mm	B mm
Support bracket/joint W7/40-50	48	200
Support bracket/joint W7/40-70	68	200
Support bracket/joint W7/40-100	98	200
Support bracket/joint W7/40-150	148	200
Support bracket/joint W7/40-200	198	200
Support bracket/joint W7/40-300	297	300
Support bracket/joint W7/40-400	397	300
Support bracket/joint W7/40-500	498	300
Support bracket/joint W7/40-600	598	300




Support bracket/joint W7/40 is used for straight joining. Push-in mounting. See also Joint W7/40 HDG, p.101, used for joining of Hot dip galvanized trays.




If necessary trays and lighting trunkings are locked using Screw set W38P or Locking plug W41.




With Pendant attachment W21 installed on Support bracket/joint W7/40-100, 200, 300 or 400 a complete support bracket is obtained.




Tube pendant attachment W73 or the one half of Pendant attachment W21 are mounted on Support bracket/joint W7/40-70, 100, 200, 300 or 400 with Screw set W36/W36C.



W7/40-50, 150, 500 and 600 are only used for joining, not as support brackets. Reinforced tray is to be joined with Side joint W49/40.




End bracket WN17 can be used as vertical piece on Support bracket/joint W7/40, mounted with Screw set W36/W36C.



Support bracket/joint W7/40 is used to achieve an invisible suspension in or in connection with bends or junctions, here with End bracket WN17 mounted as vertical piece.



Technical information

Use and installation



Joint W7/40 HDG

Used as a joint for Hot dip galvanized Cable trays W3/40 and Lighting trunkings W70.




Joint W7/40 Hdg is only used for joining, not as support bracket. If necessary trays are locked using Screw set W38P or Locking plug W41

Technical information


Use and installation

Support bracket/joint W7/60


To be used as a support bracket or joint for cable tray W1/60, W3/60. When joining cable tray W1/60 FS (reinforced), side joint W49/60 must be used.

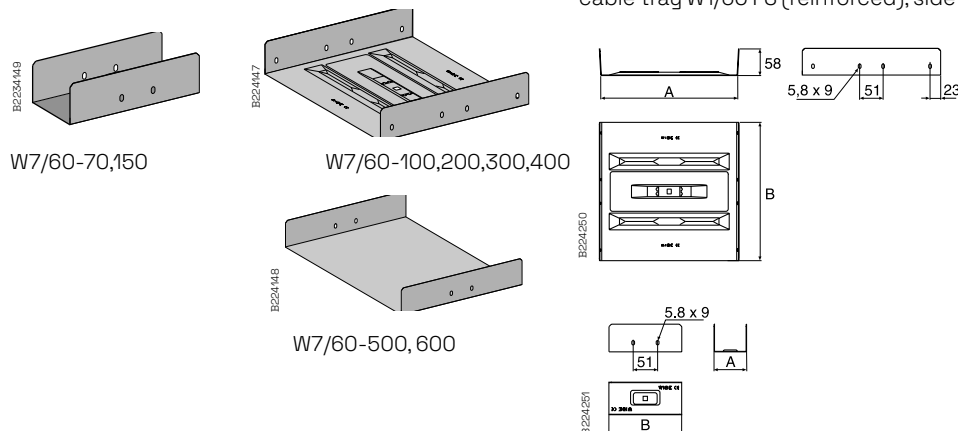


Type	A mm	B mm
Support bracket/joint W7/60-70	68	152
Support bracket/joint W7/60-100	98	200
Support bracket/joint W7/60-150	148	200
Support bracket/joint W7/60-200	198	200
Support bracket/joint W7/60-300	297	300
Support bracket/joint W7/60-400	397	300
Joint W7/60-500	498	300
Joint W7/60-600	598	300




Support bracket/joint W7/60 is used for straight joining. Push-in mounting.




If necessary trays are locked using Screw set W38P or Locking plug W41.




With Pendant attachment W21 installed, a complete support bracket is obtained. Does not apply to W7/60-70, 150, 500 and 600.




Tube pendant attachment W73 or one half of Pendant attachment W21 are mounted with Screw set W36/W36C. Does not apply to W7/60-500 and 600.



W7/60-500 och 600 are only used for joining, not as support brackets. Reinforced tray is to be joined with Side joint W49/60.



End bracket WN17 can be used as vertical piece on Support bracket/joint W7/60 mounted with Screw set W36/W36C.




Support bracket/joint W7/60 is used to achieve an invisible suspension in or in connection with bends or junctions, here with End bracket WN17 mounted as vertical piece.

Technical information

Use and installation





W20-70




W20-100

Support bracket W20


Support bracket to be used for invisible installation of lighting trunking W70/71, width 70 and 100 mm. The support bracket is snapped firmly into the trunking. Two nuts M10 are included. Suitable for threaded rod W76 M10.




Lightly press down Support bracket W20-70 into Lighting trunking W70-70.




Mount Support bracket W20-70 onto Threaded rod W76 M10 with 2 M10 nuts.



Support bracket W20-100 is mounted onto Threaded rod W76 M10 with 2 M10 nuts.





W20A-70



W20A-100



Support bracket W20A

Support bracket to be used for invisible installation of lighting trunking W70/71, width 70 and 100 mm. The support bracket is snapped firmly into the trunking. The spring locking device facilitates easy vertical height adjustment. Suitable for threaded rod W76 M10.



Support brackets W20A-70 and W20A-100 are mounted on Threaded rod W76 M10. This enables simple vertical adjustment of +30 mm.


Lightly press down Support bracket W20A-70 into Lighting trunking W70-70.



Support bracket W20A-100 is easily snapped firmly into Lighting trunking W70-100.

Technical information

Use and installation





W80


W81

Pendant bracket W80/W81

Pendant bracket to be used to support lighting trunking W70-50. W80 pendant bracket facilitates easy vertical height adjustment on threaded rod. W81 needs to be suspended with Pendant rail W32.

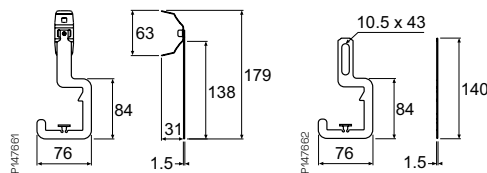


Pendant bracket W80 mounted under Lighting trunking W70-50 and attached with Screw set W36/W36C. Threaded rod W76 M6 is easily mounted in the spring clasp without bolts. Adjustable to ± 30 mm.



Pendant bracket W81 is mounted under Lighting trunking W70-50 and is attached with Screw set W36/W36C. Pendant rail W32 is mounted using Screw set W37. Adjustable to ± 18 mm.


Technical information

Use and installation




Support bracket W1940


Support bracket to be used for invisible installation of cable trays W1/40 and W3/40.




Type	A mm
Support bracket W1940-100	90
Support bracket W1940-200	190
Support bracket W1940-300	289
Support bracket W1940-400	389
Support bracket W1940-500	489
Support bracket W1940-600	589




Tray W1/40 and W3/40, widths 200 to 400, are mounted with suitable Support bracket W1940, Pendant rail W32, Pendant attachment W21, Screw sets W37 and W36/W36C. Trays with width 100 can be mounted with Support bracket W1940-100, one half of Pendant attachment W21 or Tube pendant attachment W73 and Screw set W36/W36C.




Support bracket W1940 mounted with Ceiling bracket 5, Pendant/ Fixing rail 24/34 and Angle bracket W8S. Screw set 22S must be used. For cable tray widths 500 and 600.




Support bracket W1940 mounted on Vertical piece 2 and Ceiling bracket 5. Screw set 22S must be used. For cable tray widths 500 och 600.




Support bracket W1940 can be mounted with Vertical piece 2, Pendant joint 2J, Pendant/ Fixing rail 24/34 and Ceiling bracket 5. Screw set 22S must be used. For cable tray widths 500 and 600.




Alternatively, Tray W1/40 and W3/40 with widths 500 and 600 can be installed with suitable Support bracket W1940, Threaded rod W76 M10 and 2 M10 nuts.



Alternatively, Tray W1/40 and W3/40 with widths 500 and 600 can be installed with suitable Support bracket W1940, Threaded rod W76 M10 and Tube pendant attachment W73.




Alternatively, Tray W1/40 and W3/40 with widths 500 and 600 can be installed with suitable Support bracket W1940, Pendant rail W32, Pendant attachment W21 and Screw set W37.



Tray W1/40 and W3/40 can be mounted on suitable Support bracket W1940 and 2 End bracket WN17 as pendant. The end brackets are joined with 2 Screw sets 22S and can be adjusted in height. The pendant can be mounted in the support bracket with Screw set W36/ W36C.


Technical information

Use and installation

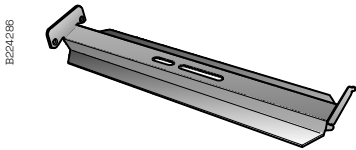


Support bracket W1960


Support bracket to be used for invisible installation of cable trays W1/60 and W3/60.




Type	A mm
Support bracket W1960-100	89
Support bracket W1960-200	189
Support bracket W1960-300	289
Support bracket W1960-400	389
Support bracket W1960-500	489
Support bracket W1960-600	589




Tray W1/60 and W3/60, widths 200 to 400, are mounted with suitable Support bracket W1960 and Pendant rail W32, Pendant attachment W21 and Screw set W37. Trays with width 100 can be mounted with Support bracket W1960-100, one half of Pendant attachment W21 or Tube pendant attachment W73 and Screw set W36/W36C.




Support bracket W1960 mounted with Ceiling bracket 5, Pendant/Fixing rail 24/34 and Angle bracket W8S. Screw set 22S must be used. For cable tray widths 500 and 600.




Support bracket W1960 mounted on Vertical piece 2 and Ceiling bracket 5. Screw set 22S must be used. For cable tray widths 500 och 600.




Support bracket W1960 can be mounted with Vertical piece 2, Pendant joint 2J, Pendant/Fixing rail 24/34 and Ceiling bracket 5. Screw set 22S must be used. For cable tray widths 500 and 600.




Alternatively, Tray W1/60 and W3/60, widths 500 and 600, can be installed with suitable Support bracket W1960, Threaded rod W76 M10 and 2 M10 nuts.



Alternatively, Tray W1/60 and W3/60, widths 500 and 600, can be installed with suitable Support bracket W1960, Threaded rod W76 M10 and Tube pendant attachment W73.



Alternatively, Tray W1/60 and W3/60, widths 500 and 600, can be installed with suitable Support bracket W1960, Pendant rail W32, Pendant attachment W21 and Screw set W37.





Tray W1/60 and W3/60 can be mounted on suitable Support bracket W1960 with 2 End brackets WN17 used as pendant. The end brackets are joined with 2 Screw sets 22S and can be adjusted in height. The pendant can be mounted in the support bracket with 1 Screw set W36.

Technical information


Use and installation

Internal cantilever arm W17


Internal cantilever arm to be used for invisible mounting inside cable tray W1/40 and W3/40.




Type	A mm	B mm	C mm	D mm	E mm
W17/40-100	89	140	70	55	42
W17/40-200	189	140	70	55	42
W17/40-300	289	165	95	75	55
W17/40-400	389	165	95	75	55




Internal cantilever arm W17/40 is mounted on Vertical piece 2F using a T-bolt.



When mounting an Internal cantilever arm W17/40 on a porous wall or when surface pressure must be reduced use Mounting rail 40.




The Internal cantilever arm is mounted onto the wall with an Expansion bolt alt. a Concrete screw.



Internal cantilever arm W17/40 can be mounted right over support bracket/joint.

Loading table for Internal cantilever arm W17/40 on wall



Mounted onto wall with Expansion bolt. Breaking load for cantilever arm mounted onto wall, see below.


Cantilever arm type	Max load F at 3° deflection of cantilever arm		Deflection in mm vid 3° deflection of cantilever arm	Breaking load	
	kN	kg	mm	kN	kg
W17/40-100	1.0	100	5.2	3.0	300
W17/40-200	0.8	80	10.5	2.0	200
W17/40-300	1.1	110	15.7	3.0	300
W17/40-400	1.0	100	20.9	2.0	200

Technical information


Use and installation

Adjustable cantilever arm W1840


Adjustable cantilever arm to be used for invisible mounting inside cable trays W1/40 and W3/40. Adjustability 0-25 mm W1840-100 and 0-50 mm W1840-200 to 600.

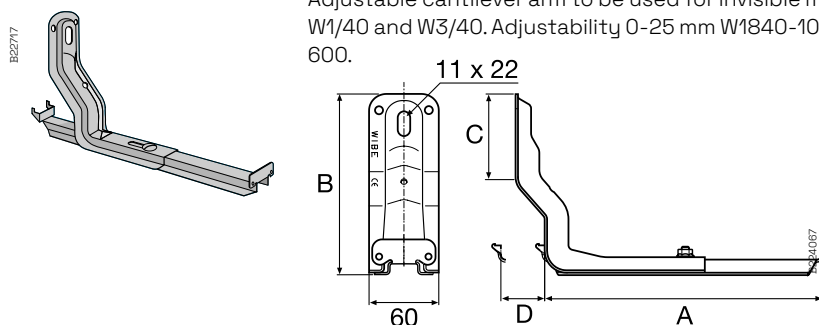


Type	A mm	B mm	C mm	D mm
W1840-100	88	160	70	0-25
W1840-200	188	160	70	0-50
W1840-300	289	185	95	0-50
W1840-400	389	185	95	0-50
W1840-500	489	185	95	0-50
W1840-600	589	185	95	0-50




Mounting directly onto wall. At this type of installation the adjusting allowance of the tray is limited. Breaking load - see table above.



Mounting on Vertical piece 2F using T-bolt. The Cantilever arm W1840 can be adjusted to a max. of 50 mm.




Mounting of two adjustable cantilever arms on the same Vertical piece 2F. (Tray widths more than 400 mm). Use Screw set 20S if the two trays have the same width. At different tray widths T-bolt 26U and Screw set W37 must be used.



When mounting cable trays, widths 500-600 mm, it might be necessary with a reinforcement of the cantilever arm. Installation band and stretching screw can be used for mounting in ceiling or on a vertical piece.

Loading table for cantilever arm W1840 on wall




Mounted onto wall with Expansion bolt. Breaking load for cantilever arm mounted onto wall.


type	Max load F at 3° deflection of cantilever arm		Deflection at 3° deflection of cantilever arm	Breaking load	
	kN	kg	mm	kN	kg
W1840-100	1.0	100	5.2	3.0	300
W1840-200	0.8	80	10.5	2.0	200
W1840-300	1.1	110	15.7	3.0	300
W1840-400	1.0	100	20.9	2.0	200
W1840-500	0.65	65	26	1.3	130
W1840-600	0.5	50	31.5	1.0	100

Technical information

Use and installation




W1860 100-200




W1860 300-600

Adjustable cantilever arm W1860


Adjustable cantilever arm to be used for invisible mounting inside cable trays W1/60 and W3/60. Adjustability 0-25 mm W1860-100 and 0-50 mm W1860-200 to 60.

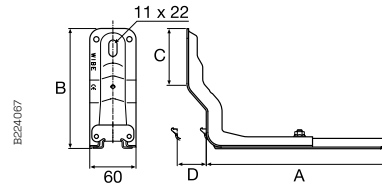


Type	A mm	B mm	C mm	D mm
W1860-100	89	160	70	0-25
W1860-200	189	160	70	0-50
W1860-300	289	185	95	0-50
W1860-400	389	185	95	0-50
W1860-500	489	185	95	0-50
W1860-600	589	185	95	0-50




Mounting directly onto wall. At this type of installation the adjusting allowance of the tray is limited. Breaking load - see table below.



Mounting on Vertical piece 2F using T-bolt. The Cantilever arm W1860 can be adjusted to a max. of 50 mm.




Mounting of two adjustable cantilever arms on the same Vertical piece 2F. (For trays wider than 400 mm). Use Screw set 20S if the two trays have the same width. At different tray widths T-bolt 26U and Screw set W37 must be used.



When mounting cable trays, widths 500-600 mm, it might be necessary with a reinforcement of the cantilever arm. Installation band and stretching screw can be used for mounting in ceiling or on a vertical piece.

Loading table for cantilever arm on wall




Mounted onto wall with Expansion bolt. Breaking load for cantilever arm mounted onto wall.

Cantilever arm type	Max load F at 3° deflection of cantilever arm		Deflection in mm at 3° deflection of cantilever arm	Breaking load	
	kN	kg	mm	kN	kg
W1860-100	1.0	100	5.2	3.0	300
W1860-200	0.8	80	10.5	2.0	200
W1860-300	1.1	110	15.7	3.0	300
W1860-400	1.0	100	20.9	2.0	200
W1860-500	0.65	65	26.0	1.3	130
W1860-600	0.5	50	31.5	1.0	100



Technical information

Use and installation




Back plate W30

Back plate to be used for wall installation of internal cantilever arms on porous walls, to reduce the surface pressure.





Mount Back plate W30 as shown in the illustration to reduce the surface stress on porous walls.




Mounting rail 40


Mounting rail to be used for wall installation of cantilever arms on porous walls to reduce the surface pressure or to enable height adjustment of cantilever arms.

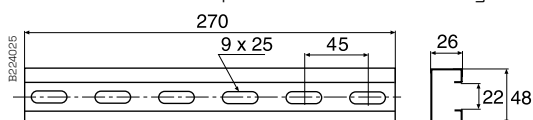

The mounting rail is installed between a cantilever arm and wall to reduce surface pressure on porous walls or to enable vertical adjustment of cantilever arms.



Cantilever arm 50 is installed using a T-bolt. The cantilever arm is vertically adjustable.





Internal cantilever arm W17 and Adjustable cantilever arm W1840 are mounted with T-bolt. The cantilever arm is vertically adjustable.

Technical information

Use and installation


Vertical piece 2Fi

Vertical piece to be used for lighter mountings with Cantilever arm 50i.

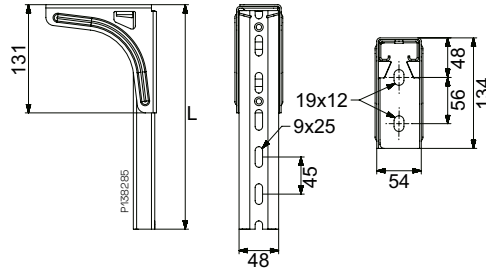


Type	L mm
Vertical piece 2Fi-300	272
Vertical piece 2Fi-500	497
Vertical piece 2Fi-750	722
Vertical piece 2Fi-1000	992


Loadings




Vertical piece 2Fi can be mounted in ceiling close to wall.



Vertical piece 2Fi is suitable for floor mounting.





Vertical piece 2Fi mounted in the inner hole. Breaking load=500 kg (5 kN) at symmetrical loading.




Vertical piece 2Fi mounted in the outer hole. Breaking load=100 kg (1 kN) at symmetrical loading.

Vertical piece 2F


Vertical piece to be used for installation of Internal cantilever arm W17/40, Adjustable cantilever arm W18/40 or Cantilever arm 50/50L. Can be joined to Pendant/fixing rail 24/48 with Pendant joint 2FJ.

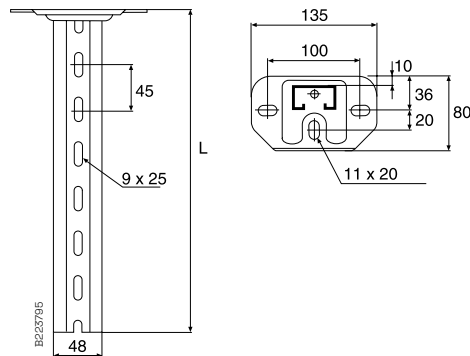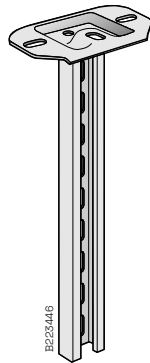


Type	L mm
Vertical piece 2F/280	280
Vertical piece 2F/370	370
Vertical piece 2F/505	505
Vertical piece 2F/640	640
Vertical piece 2F/730	730
Vertical piece 2F/865	865
Vertical piece 2F/1000	1000
Vertical piece 2F/1500	1495




Mounted in ceiling with Expansion bolt alt. Concrete screw.



Cantilever arm 50 is mounted with a T-bolt 26U.




Internal cantilever arm W17/40 is mounted with a T-bolt 26U.



In order to reduce the deflection of Vertical piece 2F for heavy loads on Internal cantilever arm W17/40 and Adjustable cantilever arm W1840/W1860, Pendant bar 1 is installed.



Technical information

Use and installation




Ceiling bracket 5TPA


Ceiling bracket with telescopic function, to be used for mounting of various sizes of trapezoid plates. Including screw MVBF 8x16 and nut M6MF8. Breaking load: 150 kg without deformation.

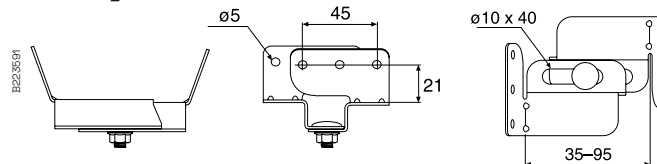


Ceiling bracket 5TPA can be mounted in trapezoid plate with blind rivets or suitable screws. The bracket is adjustable from 35 to 95 mm.




Pendant attachment W21 or Tube pendant attachment W73 (Wibe Cable Tray) can be mounted in Ceiling bracket 5TPA with the existing screw.




Ceiling bracket 5 or Ceiling attachment W31 can be mounted with the existing screw.



Vertical piece 2 or 2F can be mounted with the existing screw.




Install Mounting rail 40 between 2 Ceiling brackets 5TPA if the vertical piece must be adjusted sideways.



Pendant W76 M8 or M10 installed in Ceiling bracket 5TPA.

Breaking load






Ceiling bracket 5TPA can be loaded with $F=150$ kg without deformation. For loading figures for thin plate or fixing elements, follow suppliers recommendations.

Technical information


Use and installation

Ceiling attachment W31


Ceiling attachment to be used for installations with Pendant rail W32.




The Ceiling attachment W31 is mounted in concrete ceilings with one or two Expansion bolts. Pendant rail W32 is mounted with Screw set W37. Can be rotated 90°.



The Ceiling attachment W31 can be mounted directly in a slanted ceiling with Expansion bolts.






The Ceiling attachment W31 can be mounted directly in TP ceilings using an Ogebe fixing type E.




The Ceiling attachment W31 can be mounted onto a concrete beam with Expansion bolts.

Pendant rail W32


Pendant rail W32 can be installed in ceilings together with Ceiling attachment W31 or Ogebe fixing type E.




The Pendant rail W32 is cut to the required length and mounted in the ceiling with Ceiling attachment W31 and Pendant attachment W21 mounted onto Support bracket/joint W7.



For lighter installations with small loads, one half of Pendant attachment W21 is mounted in Support bracket W7 with Screw set W36/ W36C. The second part is used as a ceiling bracket, Pendant rail W32 is mounted using Screw set W37.



2 Pendant rails W32 can be joined by placing them over-lapping each other, see above. Use Screw set W37 for assembling.






Using Locking clamp W77, the Pendant rail W32 can be mounted between two lighting trunkings or cable trays, either as a stabiliser or to form a simple duct.

Technical information


Use and installation

Pendant attachment W21


Pendant attachment to be used in combination with pendant rail W32, support bracket/joint W7, etc.




The Pendant attachment W21 is inserted into the slits in the Support bracket/joint W7 (100-400). Does not apply to W7-50,150,500 and 600.




The required length of Pendant rail W32 is mounted in the Pendant attachment W21 with Screw set W37. Adjustable to ± 30 mm.




For lighter installations with small loads, only one half of the Pendant attachment W21 is mounted in Support bracket W7 with Screw set W36/W36C. The second part of the Pendant attachment W21 is used as a ceiling bracket. The Pendant rail W32 is mounted using Screw set W37.




When mounting with wire, only one half of the Pendant attachment W21 is mounted in Support bracket/joint W7 using Screw set W36/W36C. The wire is mounted through the oval hole and locked with a wire lock.



When mounting tray or Lighting trunking W70, one half of the Pendant attachment W21 is mounted directly in Support bracket/joint W7 with Screw set W36/W36C. The pendant rail is mounted with Screw set W37.





In concrete ceilings Pendant attachment W21 is mounted with Expansion bolt.



1. Pendant attachment W21
2. Screw set W36/W36C
3. Support bracket/joint W7
4. Cable tray/Lighting trunking

Ceiling installation with cable tray/lighting trunking





W7 = Support bracket/joint
W21 = Pendant attachment
W31 = Ceiling attachment
W32 = Pendant rail
W36 = Screw set
W37 = Screw set

Technical information


Use and installation

Pendant attachment W73


Tube pendant attachment to be used for mounting of threaded rod W76 M6, M8 or M10 in ceiling and cable tray. Provides a quick and screw-less height adjustment of the threaded rod.




The Tube pendant attachment W73 is mounted in Support bracket/joint W7 with Screw set W36/W36C. Does not apply to W7-500 and 600.



The Tube pendant attachment can be mounted directly in the lighting trunking using Screw set W36/W36C. Does not apply to Lighting trunking W70-40.




Threaded rod M6, M8 or M10 is easily mounted in the spring clasp without screws. Simple adjustment up to ± 30 mm. Mounted in concrete ceilings with Expansion bolt.



Mounted in wood with self-drilling screws.

Threaded rod B41 and W76 M6, M8, M10


Used for installation of cable trays and lighting trunkings.

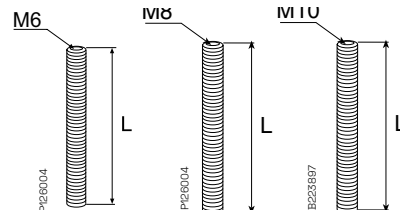

Type and Surface treatment	L= 1000mm	L= 2000mm	L= 3000mm
M6 EZ	W76	W76	W76
M8 EZ	W76	-	-
M10 EZ	-	W76	W76
M8 HDG	W76	W76	-
M8 AISI 316L	B41	B41	-
M10 AISI 316L	B41	B41	-


Technical information

Use and installation



Joint nut M6, M8, M10

Used for joining of Threaded rods.




Flange nut M6, M8, M10

Flange nut is mounted onto Threaded rods in order to lock support brackets and ceiling brackets.




Thread lock M6, M8, M10


Used for joining of Threaded rod.




Joint nut is used for joining of Threaded rods.




Flange nuts are mounted onto the Threaded rod in order to lock support brackets and ceiling brackets.




Thread lock is used for joining of Threaded rods. Max. permitted load=80kg



The Threaded rod is cut to required length and mounted with 2 Tube pendant attachments W73.





Installation of Threaded rod with Concrete screw MMS-I.

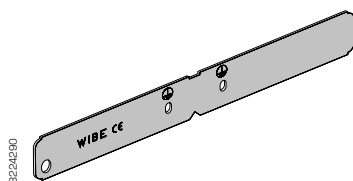

Side joint W49/40

Side joint to be used for straight joining of cable tray W1/40 and W3/40.




2 Side joints W49/40 are used for straight joining of Cable tray W1/40, W1/40 FS and W3/40. 4 Screw sets W38P are required (not included). For trays 300 mm and wider we recommend to use Support bracket/joint W7/40.

Technical information



Use and installation

B224231




Side joint W49/60

Side joint to be used for straight joining of cable tray W1/60 and W3/60.





2 Side joints W49/60 are used for straight joining of Cable trays W1/60, W1/60 FS and W3/60. 4 Screw sets W38P are required (not included). For trays 300 mm and wider we recommend to use Support bracket/joint W7/60.

B224540



Joint W2

Side joint to be used for straight joining of installation tray W4.

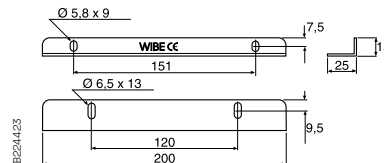


Used for joining Installation tray W4. To be mounted on the outside of the tray and attached in bottom with 2 Screw sets W34 (pre-galvanized, stainless steel and pre-galvanized powder coated trays). For hot dip galvanized and hot dip galvanized powder coated trays Screw set W38P must be used.

Technical information


Use and installation

T-joint W9/40


T-joint to be used to construct T-sections or X-sections. Also used for oblique branches. The ref. number includes two pieces of T-joints and Screw set W38P.



B22403817



B2240389




B223819

Potential balancing


In order to fulfil the potential balancing according to SS-EN 61537 the T-joint must be secured with

- 1 Self-drilling screw RXB 4,2 x13
- 2 Screw set W38P, drilling is required.


Tightening torque 2 Nm.



B223819



B223820




B223821

Straight angling. If necessary, the lugs are locked to the edge of the tray using pliers. Can also be locked with blind rivets or selftapping screws.


Oblique angling. If necessary, the lugs are locked to the edge of the tray using pliers. Can also be locked with blind rivets or selftapping screws.

T-joint W9/60


T-joint to be used to construct T-sections or X-sections. Also used for oblique branches. The ref. number includes two pieces of T-joints and Screw set W38P.



B224177



B224178




B224182

Potential balancing


In order to fulfil the potential balancing according to SS-EN 61537 the T-joint must be secured with

- 1 Self-drilling screw RXB 4,2 x13
- 2 Screw set W38P, drilling is required.


Tightening torque 2 Nm.



B224183



B224184



B224185

Straight branches. If necessary, the lugs are locked to the edge of the tray using pliers. Can also be locked with blind rivets or selftapping screws.



Oblique branches. If necessary, the lugs are locked to the edge of the tray using pliers. Can also be locked with blind rivets or selftapping screws.

Technical information


Use and installation

T-joint W29/40

T-joint to be used to construct T-junctions or X-junctions. Easy push-in assembly. Locks into the tray via locking flap. To be suspended over the lateral side of the tray and locked in a suitable way.



Type	A mm	B mm
T-joint W29/40-70	68	-
T-joint W29/40-100	98	-
T-joint W29/40-200	198	120
T-joint W29/40-300	301	220
T-joint W29/40-400	401	320
T-joint W29/40-500	501	420
T-joint W29/40-600	601	520




Potential balancing


In order to fulfil the potential balancing according to SS-EN 61537 the T-joint must be secured with

- 1 Self-drilling screw RXB 4
- 2 x 13
- 2 Screw set W38P


Tightening torque 2 Nm.



Simply installed with push-in mounting. Lock into tray with Screw set W38P.




Used with T- and X-junction. Mounted directly onto tray edge. Can be attached to tray by pinching the lip at the top of the tray.




Used with open junction together with Joint W7/40 with opening and Tray W1/40 with opening. Attached with Screw set W38P.


Examples of suspensions with open junction where T-joint W29/40, Tray W1/40 with opening and Joint W7/40 with opening are included.




Suspension with Pendant strip W33.



Suspension with Pendant rail W32 and half a Pendant attachment W21.




Suspension with End bracket WN17.



Suspension with wire and Ogebe fixing type E.


Technical information

Use and installation




T-joint W29/60

T-joint to be used to construct T-junctions or X-junctions. Easy push-in assembly. Locks into the tray via locking flap. To be suspended over the lateral side of the tray and locked in a suitable way.

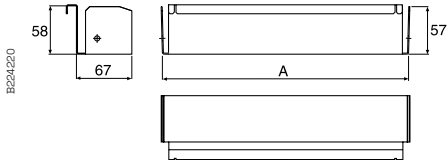

Type	A mm
T-joint W29/60-70	68
T-joint W29/60-100	98
T-joint W29/60-200	198
T-joint W29/60-300	298
T-joint W29/60-400	398
T-joint W29/60-500	498
T-joint W29/60-600	598




Potential balancing

In order to fulfil the potential balancing according to SS-EN 61537 the T-joint must be secured with

1 Self-drilling screw RXB 4.2 x 13

2 Screw set W38P



Tightening torque 2 Nm.



Used with T- and X-junction. Mounted directly onto tray edge. Can be attached to tray by pinching the lip at the top of the tray.


Technical information

Use and installation





Vertical riser W11/40, W11F/40


Vertical riser to be used as internal or external riser. Can be bent to the desired angle up to 90°. Push-in installation. The riser is delivered flat.

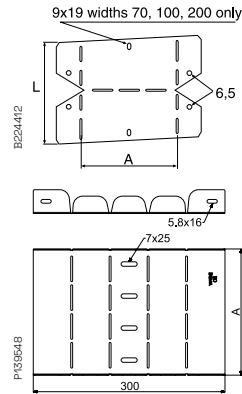

Type	A mm	L mm
Vertical riser W11/40-50	48	150
Vertical riser W11/40-70	68	150
Vertical riser W11/40-100	98	150
Vertical riser W11/40-150	148	150
Vertical riser W11/40-200	198	200
Vertical riser W11/40-300	298	200
Vertical riser W11/40-400	398	200
Vertical riser W11/40-500	498	200
Vertical riser W11/40-600	598	200
Vertical riser W11F/40-50	48	-
Vertical riser W11F/40-70	68	-
Vertical riser W11F/40-100	98	-
Vertical riser W11F/40-150	148	-
Vertical riser W11F/40-200	198	-
Vertical riser W11F/40-300	298	-
Vertical riser W11F/40-400	398	-
Vertical riser W11F/40-500	498	-
Vertical riser W11F/40-600	598	-




For upward or downward angling to a desired angle up to 90°. Should be locked with Screw set W38P or Locking plug W41.



Vertical riser W11/40 is delivered flat and must be bent by the installer on the job site.




Vertical riser W11F/40 is delivered flat, must be bent to the desired angle by the installer, used for vertical 90° angling. Screw set W38P is used for mounting.




Technical information

Use and installation




Vertical riser W11/60


Vertical riser to be used as internal or external riser. Can be bent to the desired angle up to 90°. Push-in installation. The riser is delivered flat.




Type	A mm	L mm
Vertical riser W11/60-70	67	150
Vertical riser W11/60-100	97	150
Vertical riser W11/60-150	147	150
Vertical riser W11/60-200	197	200
Vertical riser W11/60-300	297	200
Vertical riser W11/60-400	397	200
Vertical riser W11/60-500	497	200
Vertical riser W11/60-600	597	200



Vertical riser W11/60 is delivered flat and must be bent by the installer on the job site.



For upward or downward branching at a desired angle up to 90°. Push-in installation.




Should be attached with Screw set W38P or Locking plug W41.

Technical information





Use and installation

Vertical riser W4, interior

Vertical riser suitable for installation tray W4. To be used as internal or external riser. The riser is delivered flat and can be bent to the desired angle up to 90°.

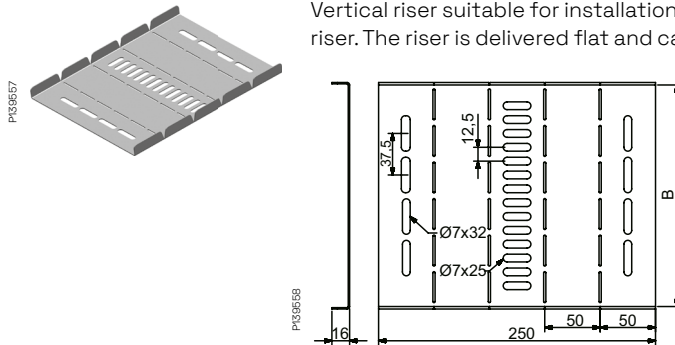

Type	B mm
Vertical riser W4-50	52
Vertical riser W4-75	77
Vertical riser W4-100	102
Vertical riser W4-150	152
Vertical riser W4-200	202
Vertical riser W4-250	252
Vertical riser W4-300	302
Vertical riser W4-400	402




Vertical riser W4 is delivered flat, must be bent to the desired angle by the installer, used for vertical 90° angling. Mounted outside of trays W4. Attached in bottom with Screw set W34 (pre-galvanized, stainless steel and pre-galvanized powder coated trays). For hot dip galvanized trays Screw set W38P must be used.

When used for vertical 90° angling from cable ladder the vertical riser is attached to the cable ladder with strips.


Technical information

Use and installation




Adjustable bend W10S/40


Adjustable bend to be used for horizontal angling from 105° to 165° in steps of 7.5°. Push-in installation.




Type	A mm
Adjustable bend W10/40-50	47
Adjustable bend W10/40-70	67
Adjustable bend W10/40-100	97
Adjustable bend W10/40-150	147
Adjustable bend W10/40-200	197
Adjustable bend W10/40-300	297
Adjustable bend W10/40-400	397
Adjustable bend W10/40-500	497
Adjustable bend W10/40-600	597




Push-in installation. Turn up inner and outer sides and mount the Adjustable bend W10/40 inside the tray.



Adjustable bend W10/40 permits desired horizontal angling between 105° and 165° in stages of 7.5°.




If necessary, Adjustable bend W10/40 may be locked using Screw set W38P or Locking plug W41.




Adjustable bend W10S/60


Adjustable bend to be used for horizontal angling from 105° to 165° in steps of 7.5°. Push-in installation.




Type	A mm
Adjustable bend W10/60-70	67
Adjustable bend W10/60-100	97
Adjustable bend W10/60-150	147
Adjustable bend W10/60-200	197
Adjustable bend W10/60-300	297
Adjustable bend W10/60-400	397
Adjustable bend W10/60-500	497
Adjustable bend W10/60-600	597



Push-in installation. Turn up inner and outer sides and mount the Adjustable bend W10/60 inside the tray.



Adjustable bend W10/60 permits desired horizontal angling between 105° and 165° in stages of 7.5°.





If necessary, Adjustable bend W10/60 may be locked using Screw set W38P or Locking plug W41.

Technical information


Use and installation

90° bend W10/40


Horizontal 90° bend to be used for cable trays W1/40 and W3/40. Push-in assembly.




Type	A mm
90° bend W10/40-70	67
90° bend W10/40-100	97
90° bend W10/40-200	197
90° bend W10/40-300	297
90° bend W10/40-400	397
90° bend W10/40-500	497
90° bend W10/40-600	597



Used for 90° horizontal angling. Suspension components should be mounted in or in connection with the junction. Push-in installation.



If necessary, the 90° bend W10/40 can be locked using Screw set W38P or Locking plug W41. Can be provided with holes in bottom for suspension in Pendant attachment W21 alternatively W73. Valid for max. width 200 mm.





Support bracket/joint W7/40, with a suitable pendant, is used to achieve an invisible suspension, here with End bracket WN17 mounted as vertical piece.

Technical information


Use and installation

90° bend W10/60


Horizontal 90° bend to be used for cable trays W1/60 and W3/60. Push-in assembly.




Type	A mm	B mm
90° bend W10/60-70	67	167
90° bend W10/60-100	97	197
90° bend W10/60-150	147	247
90° bend W10/60-200	197	297
90° bend W10/60-300	297	397
90° bend W10/60-400	397	497
90° bend W10/60-500	497	597
90° bend W10/60-600	597	697
90° bend W10/60-500 FS	497	597
90° bend W10/60-600 FS	597	697



Used for 90° horizontal angling. Suspension components should be mounted in or in connection with the bend.
Push-in installation.



If necessary, the 90° bend W10/60 can be locked using Screw set W38P or Locking plug W41. Can be provided with holes in bottom for suspension in Pendant attachment W21 alternatively Tube pendant attachment W73. Valid for max. width 200 mm.






Support bracket/joint W7/60, with a suitable pendant, is used to achieve an invisible suspension, here with End bracket WN17 mounted as vertical piece.

Technical information

Use and installation


90° bend W10F/40

Horizontal 90° bend to be used for cable trays W3/40. Push-in assembly.





Used for 90° horizontal angling. Suspension components should be mounted in or in connection with the junction. Push-in installation.

Type	B mm	L m
90° bend W10F/40-50	47	119
90° bend W10F/40-70	67	153
90° bend W10F/40-100	97	204
90° bend W10F/40-150	147	290
90° bend W10F/40-200	197	375
90° bend W10F/40-300	297	480
90° bend W10F/40-400	397	580
90° bend W10F/40-500	497	714
90° bend W10F/40-600	597	814



90° bend W4

90° bend to be used for cable tray W4. To be mounted on the outside of the tray and attached in the bottom segment with screw set W34.

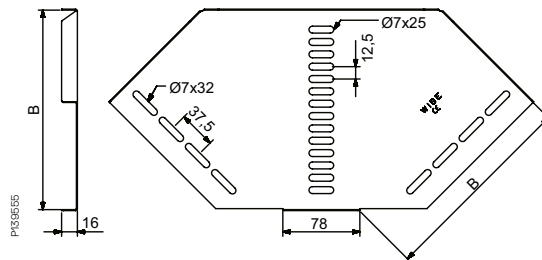


Used for horizontal 90° angling. Mounted outside of W4 trays. Attached in bottom with Screw set W34 (pre-galvanized, stainless steel and pre-galvanized powder coated trays). For hot dip galvanized trays Screw set W38P must be used.

Type	B mm
90° bend W4-50	52
90° bend W4-75	77
90° bend W4-100	102
90° bend W4-150	152
90° bend W4-200	202
90° bend W4-250	252
90° bend W4-300	302
90° bend W4-400	402

Technical information


Use and installation

B223853




T-junction W12/40


T-junction to be used for 90° horizontal junction of cable trays W1/40 and W3/40. Push-in assembly.




Type	A mm
T-junction W12/40-50	46
T-junction W12/40-70	67
T-junction W12/40-100	97
T-junction W12/40-200	197
T-junction W12/40-300	297
T-junction W12/40-400	397
T-junction W12/40-500	497
T-junction W12/40-600	597



Used for horizontal 90° junction. Suspension components should be mounted in or in connection with the junction. Push-in installation.



If necessary, the T-junction W12/40 can be locked using Screw set W38P or Locking plug W41. Can be provided with holes in bottom for suspension in Pendant attachment W21 or Tube pendant attachment W73. Valid for max. width 200 mm.




Support bracket/joint W7/40, with a suitable pendant, is used to achieve an invisible suspension, here with End bracket WN17 mounted as vertical piece.

Technical information


Use and installation

T-junction W12/60


T-junction to be used for 90° horizontal junction of cable trays W1/60 and W3/60. Push-in assembly.

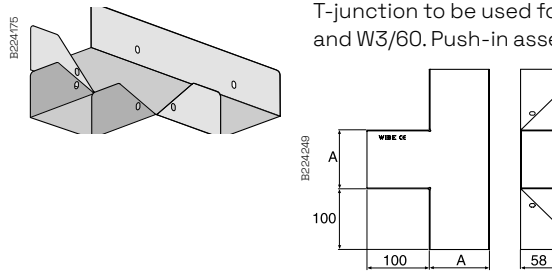


Type	A mm
T-junction W12/60-70	67
T-junction W12/60-100	97
T-junction W12/60-150	147
T-junction W12/60-200	197
T-junction W12/60-300	297
T-junction W12/60-400	397
T-junction W12/60-500	497
T-junction W12/60-600	597
T-junction W12/60-500 FS	497
T-junction W12/60-600 FS	597



Used for 90° horizontal junction. Suspension components should be mounted in or in connection with the junction. Push-in installation.



If necessary, the junction can be locked using Screw set W38P or Locking plug W41. Can be provided with holes in bottom for suspension in Pendant attachment W21 alternatively Tube pendant attachment W73. Valid for max. width 200 mm.




Support bracket/joint W7/60, with a suitable pendant, is used to achieve an invisible suspension, here with End bracket WN17 mounted as vertical piece.

Technical information

Use and installation

T-junction W12F/40

T-junction to be used for 90° horizontal junction of cable trays W3/40. Push-in assembly.


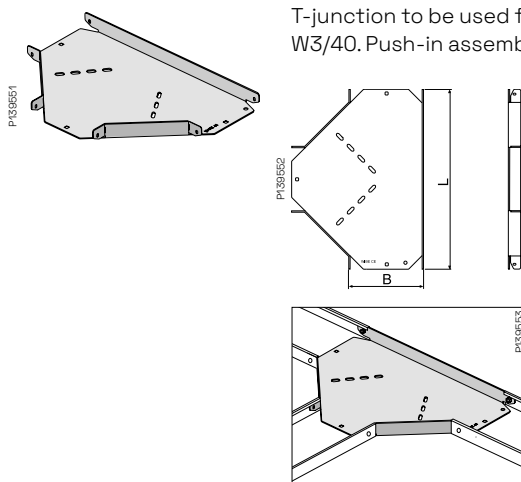


Used for horizontal 90° junction. Suspension components should be mounted in or in connection with the junction. Push-in installation.


Type	B mm	L m
T-junction W12F/40-50	47	171
T-junction W12F/40-70	67	219
T-junction W12F/40-100	97	312
T-junction W12F/40-150	147	432
T-junction W12F/40-200	197	553
T-junction W12F/40-300	297	662
T-junction W12F/40-400	397	762
T-junction W12F/40-500	497	932
T-junction W12F/40-600	597	1032

X-junction W13/40


X-junction to be used for 90° horizontal junction of cable trays W1/40 and W3/40. Push-in assembly.

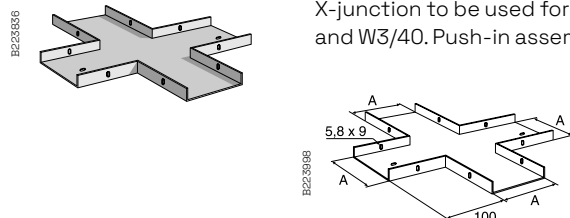


Type	A mm
X-junction W13/40-50	46
X-junction W13/40-70	67
X-junction W13/40-100	97
X-junction W13/40-200	197
X-junction W13/40-300	297
X-junction W13/40-400	397
X-junction W13/40-500	497
X-junction W13/40-600	597



Used for horizontal 90° junction of four trays with the same width. Suspension components should be mounted in or in connection with the junction. Push-in installation.



If necessary, the X-junction W13/40 can be locked using Screw set W38P or Locking plug W41. Can be provided with holes in bottom for suspension in Pendant attachment W21 or Tube pendant attachment W73. Valid for max. width 200 mm.





Support bracket/joint W7/40, with a suitable pendant, is used to achieve an invisible suspension, here with End bracket WN17 mounted as vertical piece.

Technical information




Use and installation

X-junction W13/60

X-junction to be used for 90° horizontal junction of cable trays W1/60 and W3/60. Push-in assembly.



Type	A mm	B mm
X-junction W13/60-70	67	268
X-junction W13/60-100	97	298
X-junction W13/60-150	147	348
X-junction W13/60-200	197	398
X-junction W13/60-300	297	498
X-junction W13/60-400	397	598
X-junction W13/60-500	497	698
X-junction W13/60-600	597	798
X-junction W13/60-500 FS	497	698
X-junction W13/60-600 FS	597	798






Used for 90° horizontal junction of four trays with the same width. Suspension components should be mounted in or in connection with the junction. Push-in installation.

If necessary, the junction can be locked using Screw set W38P or Locking plug W41. Can be provided with holes in bottom for suspension in Pendant attachment W21 alternatively Tube pendant attachment W73. Valid for max. width 200 mm.

Support bracket/joint W7/60, with a suitable pendant, is used to achieve an invisible suspension, here with End bracket WN17 mounted as vertical piece.

X-junction W13F/40

X-junction to be used for 90° horizontal junction of cable trays W3/40. Push-in assembly.




Type	B mm	L m
X-junction W13F/40-50	47	148
X-junction W13F/40-70	67	217
X-junction W13F/40-100	97	313
X-junction W13F/40-150	147	434
X-junction W13F/40-200	197	555
X-junction W13F/40-300	297	662
X-junction W13F/40-400	397	762
X-junction W13F/40-500	497	932
X-junction W13F/40-600	597	1032

Used for horizontal 90° junction of four trays with the same width. Suspension components should be mounted in or in connection with the junction. Push-in installation.


Technical information

Use and installation




Reducer W28/40


Reducer for 40 mm high cable trays W1 and W3. To be used together with side joint W49 in side transitions. In centered transitions only two reducers W28 are necessary.



Type	A mm	B mm
Reducer W28/40-50	50	37.5
Reducer W28/40-100,	100	37.5
Reducer W28/40-150	150	37.5
Reducer W28/40-200	200	37.5
Reducer W28/40-250	250	37.5
Reducer W28/40-300	300	37.5
Reducer W28/40-350	350	37.5
Reducer W28/40-400	400	37.5
Reducer W28/40-450	450	37.5
Reducer W28/40-500	500	37.5




Used together with 1 Side joint W49/40 at one-side transition joining of Cable tray W1/40 and W3/40, to be mounted with 2 Screw sets W38P. Always use support close to the reducer.



2 Reducers W28/40 are used at centered transition joining, to be mounted with Screw set W38P. Always use support close to the reducer.


Technical information

Use and installation




Reducer W28/60


Reducer for 60 mm high cable trays W1 and W3. To be used together with side joint W49 in side transitions. In centered transitions only two reducers W28 are necessary.



Type	A mm	B mm
Reducer W28/60-50	50	57.5
Reducer W28/60-100	100	57.5
Reducer W28/60-150	150	57.5
Reducer W28/60-200	200	57.5
Reducer W28/60-250	250	57.5
Reducer W28/60-300	300	57.5
Reducer W28/60-350	350	57.5
Reducer W28/60-400	400	57.5
Reducer W28/60-450	450	57.5
Reducer W28/60-500	500	57.5




Used together with 1 Side joint W49/60 at one-side transition joining of Cable trays W1/60 and W3/60, to be mounted with 2 Screw sets W38P. Always use support close to the reducer.



2 Reducers W28/60 are used at centered transition joining, to be mounted with Screw set W38P. Always use support close to the reducer.



Technical information

Use and installation




End cover W45/40

End cover to be mounted at the ends of cable trays W1/40 and W3/40 and of lighting trunking W70. Provided with oval holes 6x55 mm on the sides. Push-in assembly.

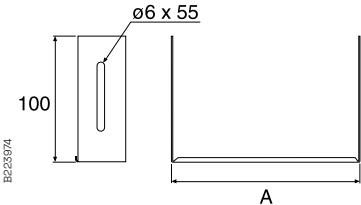



Mounted as end in trays and lighting trunkings. Locked with Locking plug W41 or Screw set W38P.

Type	A mm
End cover W45/40-70	68
End cover W45/40-100	98
End cover W45/40-150	148
End cover W45/40-200	198
End cover W45/40-300	298
End cover W45/40-400	398
End cover W45/40-500	498
End cover W45/40-600	598



End cover W45/60

End cover to be mounted at the ends of cable trays W1/60 and W3/60. Provided with oval holes 6x55 mm on the sides. Push-in assembly.



Mounted as end cover in cable trays. Locked with Screw set W38P or Locking plug W41.



Type	A mm
End cover W45/60-70	68
End cover W45/60-100	98
End cover W45/60-200	198
End cover W45/60-300	298
End cover W45/60-400	398
End cover W45/60-500	498
End cover W45/60-600	598

Technical information


Use and installation

Junction box plate W24/40


Junction box plate, with or without perforated hole pattern. To be used for the installation of junction boxes, light fittings, etc., in cable trays W1/40 and W3/40 and in lighting trunking W70.

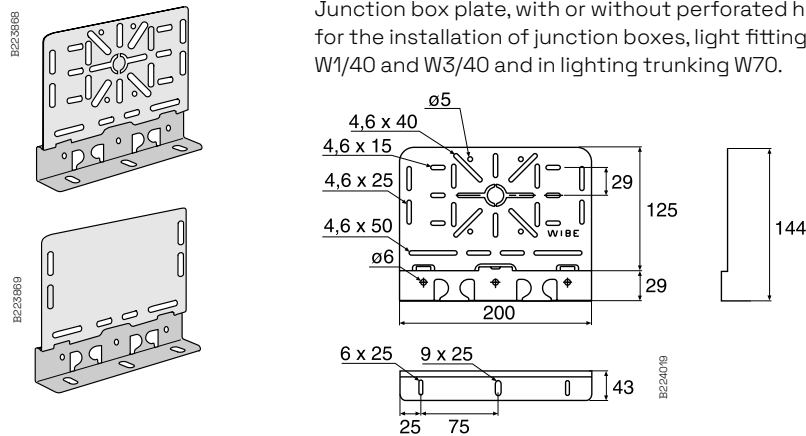


The Junction box plate W24/40 is mounted between the bottom of the trunking or tray and its folded seam.



If necessary, the Junction box plate W24/40 can be screwed tight directly in Tray W3/40 with Screw set W38P. If one requires a hidden socket box, the junction box should be folded inwards.





Can be mounted in the middle of Lighting trunking W70-100 and W70-200 with Screw set W36 or Tray W3/40 with Screw set W38P.




To firmly attach Junction box plate W24/40 in Tray W1/40 or W3/40, use blind rivets, selftapping screws or Screw set W38P.

Junction box plate W24/60


Junction box plate, with perforated hole pattern. To be used for the installation of junction boxes, light fittings, etc., in cable trays W1/60 and W3/60.

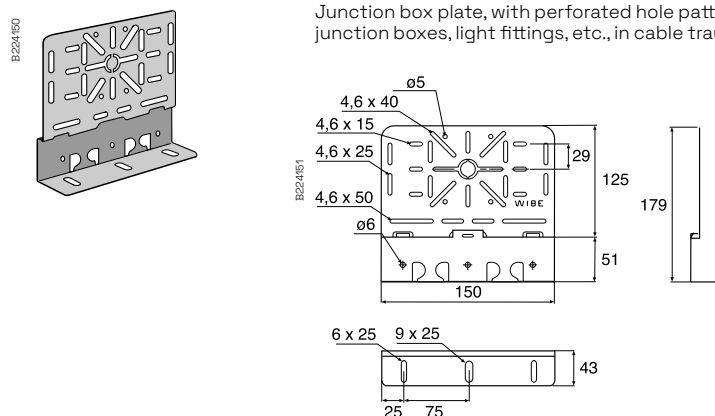


The Junction box plate W24/60 is mounted between the bottom of the tray and its folded seam.



If necessary, the Junction box plate W24/60 can be tightened directly in Tray W3/60 with Screw set W38P. If one requires a hidden socket box, the junction box should be folded inwards.




Can be mounted in the middle of Tray W3/60 with Screw set W38P.



To firmly attach Junction box plate W24/60 in Tray W1/60 or W3/60, use blind rivets, selftapping screws or Screw set W38P.


Technical information

Use and installation




Luminaire bracket W25/40


Luminaire bracket to be used for assembly of light fixtures under Cable trays W1/40 and W3/40 or Lighting trunking W70.




Type	A mm
Luminaire bracket W25/40-70	72
Luminaire bracket W25/40-100	101
Luminaire bracket W25/40-200	201
Luminaire bracket W25/40-300	301
Luminaire bracket W25/40-400	401
Luminaire bracket W25/40-500	501
Luminaire bracket W25/40-600	601



Used for installation of light fittings under tray or trunking. Can easily be moved along the tray or trunking.

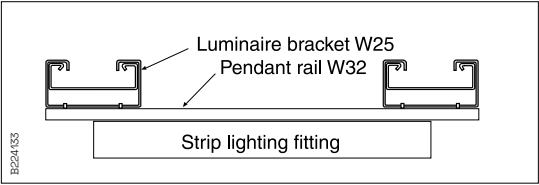


For mounting of light fittings between and under two trays or lighting trunking. The light fitting is easily moved along the tray or lighting trunking.




Luminaire bracket W25/60


Luminaire bracket to be used for assembly of light fixtures under Cable trays W1/60 and W3/60.



Type	A mm
Luminaire bracket W25/60-70	72
Luminaire bracket W25/60-100	101
Luminaire bracket W25/60-200	201
Luminaire bracket W25/60-300	301
Luminaire bracket W25/60-400	401
Luminaire bracket W25/60-500	501
Luminaire bracket W25/60-600	601



The luminaire bracket can easily be moved along the tray.



For mounting of lighting fittings under Cable tray W1/60 and W3/60.

Technical information


Use and installation

Fixings - Ogebe


The Ogebe fixing is a patented fixing intended for use when mounting plating with a thickness of 0.7-0.9 mm and 13 mm gypsum board. Pendants, cantilevers and holed strips can be mounted with these fittings.

Technical data


Material	Cold-rolled sheet steel SS 1142-32	Nut	Locking Nut M8, SMS 2165 FZB
Material treatment	Case-hardened	Bolt	M8 x 16 mm FZB
Surface treatment	Electro-galvanized	Washer	SRB 13.5 x 26 x 2 mm FZB
Maximum load	See load tables		



Drill a 12 mm dia. hole. A 10 mm drill can be used if one increases the hole dia. by slanting the electric drill.



Place the accompanying washer over the thin legs. Insert the legs through the drilled hole and fold the broader legs towards each other. If sealing is required, a standard sealing mass from building retailers can be used.




Mount the pendant, bracket or holed strip with the enclosed bolts and nuts. (The nut should always be a locking nut).

Breaking load

The load applied at an equi-distance between 2 beams 600 mm apart. The values are taken from Swedish National Testing Institute Report 8410.0032 1984-09-28.

Type of fixing	Sheeting 0.7 mm			Sheeting 0.9 mm			Gypsum 13 mm		
	F1	F2	F3	F1	F2	F3	F1	F2	F3
E	1,01 kN 101 kg	2,14 kN 214 kg	1,85 kN 185 kg	1,77 kN 177 kg	2,43 kN 243 kg	2,05 kN 205 kg			

Fixing type E



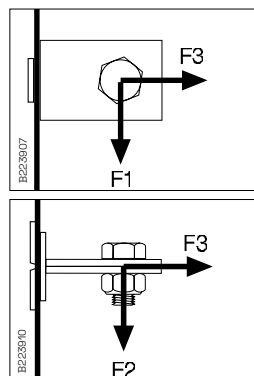


Technical information


Use and installation

Ogebe fixing type E


Ogebe fixing type E to be used for mounting in 0.7-0.9 mm sheeting or board material. Examples are hole straps, pendants, ducts, trays and piping.

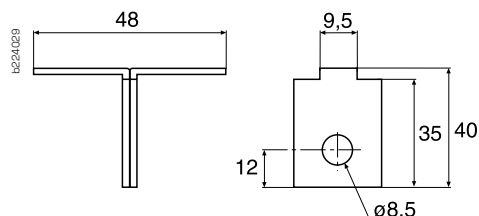


Mounting of Pendant rail W32.




Mounting of Pendant rail W32 with Ogebe fixing type E direct in lighting trunking.




Mounting of Ceiling attachment W31 on Ogebe fixing type E




Mounting of hole strap.




Stand installation on wall.




Suspension of duct or pipe.



Mounting of holed beam.



A wire can be mounted directly in the Ogebe fixing type E.



The Ogebe fixing type E can be mounted direct into Support bracket/joint W7.


Technical information

Use and installation




Cantilever arm 50i

Cantilever arm to be used for lighter mountings on walls, vertical pieces or pendant/fixing rails.

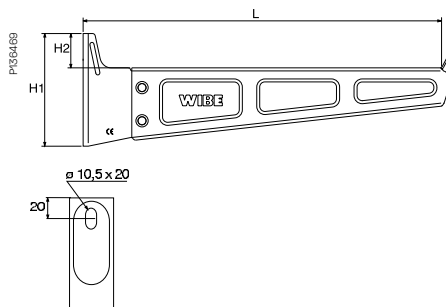


Cantilever arm type	Size		
	L mm	H1 mm	H2 mm
50i-100	150	80	32
50i-200	250	85	28.5
50i-300	350	110	33.5
50i-400	450	115	31.0
50i-500	550	150	31
50i-600	650	150	31


Widths = 100




Widths = 200




Widths = 300




Widths = 400



Widths = 500

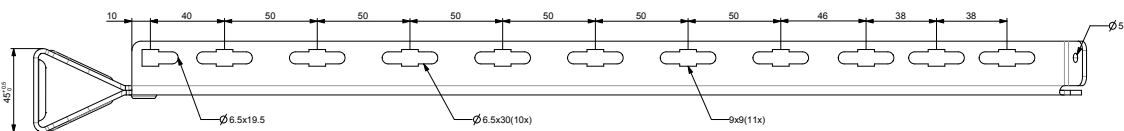


Widths = 600

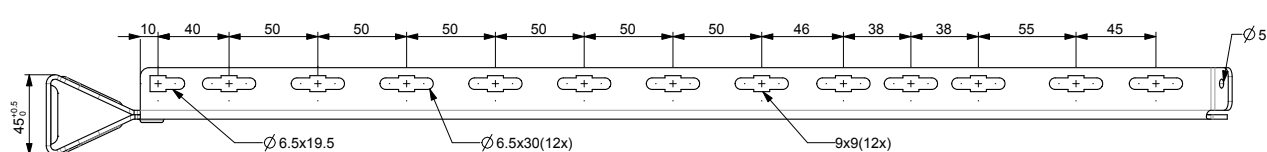


Technical information


Use and installation



Installation of cantilever arm mounted to wall using Expansion bolt M8. Breaking load - See table below.



Installation of cantilever arm using T-bolt M8 on Fixing rail 24/26 x 53 for casting-in or Pendant/ Fixing rail wall mounted.



Installation of cantilever arm using T-bolt M8 on vertical piece. Check breaking load of the vertical piece.




Breaking load F - Mounted on wall

Type	KN	kg
50i-100	2.30	230
50i-200	2.15	215
50i-300	2.20	220
50i-400	2.35	235
50i-500	3.0	300
50i-600	3.0	300

Safe working load according to IEC 61537 is breaking load divided by 1,7.

Back plate 40


Back plate to be used for installation behind Cantilever arm 50 to reduce the surface pressure on porous walls.



Mount Back plate 40 as shown in the illustration to reduce the surface stress on porous walls.



Technical information

Use and installation




Cantilever arm 50


Cantilever arm for mounting on walls, pendant/fixing rails or vertical pieces.
Material: Steel, hot-dip galvanized.

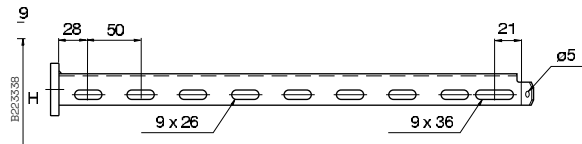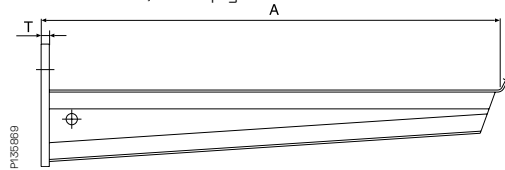



50/100-300




50/400-




50/700-1000



Installation of a Cantilever arm 50 to a wall using an Expansion bolt. Breaking load F, see table below.






Installation of a Cantilever arm 50 using a T-bolt on pendant/fixing rail mounted on the wall. Breaking load F, see table below.




Installation of Cantilever arm 50 using T-bolt with vertical piece. Breaking load F, see table below. Also check the breaking load of vertical pieces.

Size and Breaking load F

									
Type	A mm	D mm	F mm	H mm	T mm	Mounted on wall		Mounted on P/F rail 24/48 with T-bolt 26U	
						kN	kg	kN	kg
50/100	150	12	34	85	3	3.0	300	3.0	300
50/150	200	12	36	85	3	3.0	300	3.0	300
50/200	250	12	39	85	3	2.5	250	2.5	250
50/300	350	12	60	105	6	4.0	400	3.0	400
50/400	450	12	70	120	8	6.5	650	4.5	650
50/500	550	12	77	140	8	7.0	700	4.5	700
50/600	650	12	84	150	10	7.0	700	4.0	700


Technical information

Use and installation




Pendant/Fixing rail 24/34


Pendant/Fixing rail for mounting of support brackets, cantilever arms, etc.

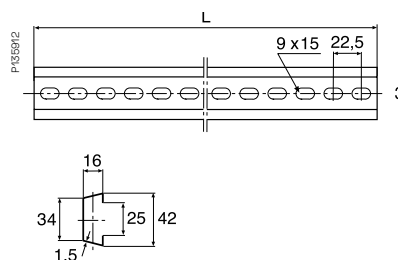


Type	L ± 2 mm
Pendant/Fixing rail 24/34	292.5
Pendant/Fixing rail 24/34	382.5
Pendant/Fixing rail 24/34	495.0
Pendant/Fixing rail 24/34	697.5
Pendant/Fixing rail 24/34	990.0
Pendant/Fixing rail 24/34	2970.0



Ceiling bracket 5 and 1
Screw set 22S together
provide a vertical piece
that can be mounted
with up to 20° slope.





Side mounting of
pendant/ fixing rails may
be done using 2
Expansion bolts alt. 2
Concrete screws.




Ceiling bracket 5

Ceiling bracket to be used for installations with Pendant/Fixing rails 24/34 and 24/48.
Screw not included.

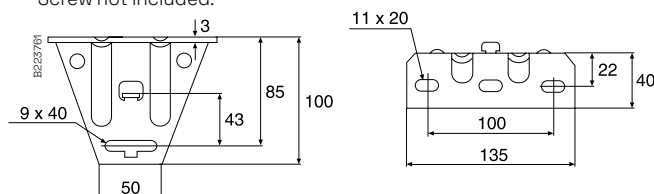


Using Pendant/Fixing
rail 24/34 or 24/48, 1
Ceiling bracket 5 and 1
Screw set 22S it is
possible to make a
vertical piece that can
be installed at an angle
of up to 20°. Breaking
load for rail 34 = 1000 kg
(10 kN). Breaking load for
rail 48 = 1200 kg (12 kN).



Mount Ceiling bracket 5 to
the back of the pendant/
fixing rail by turning the
ceiling bracket 90° and
inserting the tab into the
hole in the rail. Then turn
the ceiling bracket back
and lock it in the required
position using 1 Screw set
22S. When mounting it at a
horizontal ceiling, lock the
screw in the slot recess
for better lateral stability.
Ceiling bracket 5 can be
tilted max. 20°.


Technical information

Use and installation

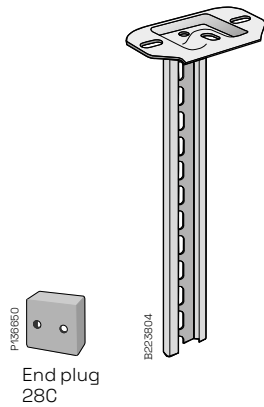


Vertical piece 2


Vertical piece to be used for installation of Support bracket W1940/W1960, symmetrical loading. Can be joined to Pendant/fixing rail 24/34 with Pendant joint 2J.

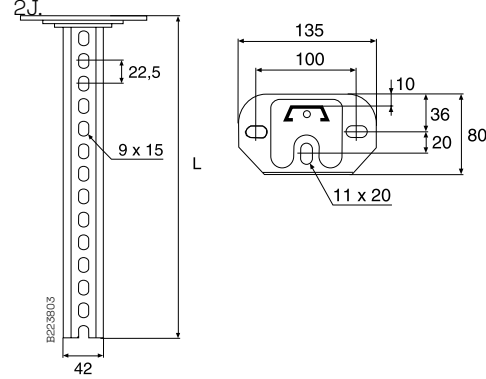


Type	L mm
Vertical piece 2/300	279
Vertical piece 2/400	392
Vertical piece 2/500	504
Vertical piece 2/700	729
Vertical piece 2/1000	1022




Mount Vertical piece 2 using an Expansion bolt or a concrete screw.




Mount Vertical piece 2 on a Fixing rail 24/26x53 for casting-in using T-bolt 26U.




Vertical piece 2 can be joined to achieve the required length using Pendant/Fixing rail 24/34 and Pendant joint 2J.



Support bracket W1940/W1960 can be mounted on Vertical piece 2 with Angle bracket W8. Use Screw set W36/W36C.




Support bracket W1940/W1960 mounted in the fixing plate of the vertical piece with Screw set W36/W36C.



Use Pendant joint 2J to join two Vertical pieces 2.


Technical information

Use and installation

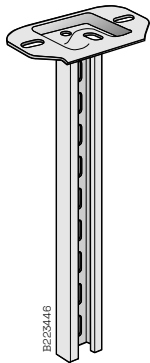


Vertical piece 2F


Vertical piece to be used for installation of Internal cantilever arm W17/40, Adjustable cantilever arm W18/40 or Cantilever arm 50/50L. Can be joined to Pendant/fixing rail 24/48 with Pendant joint 2FJ.

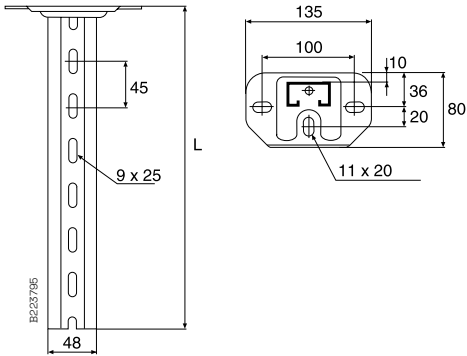


Type	L mm
Vertical piece 2F/280	280
Vertical piece 2F/370	370
Vertical piece 2F/505	505
Vertical piece 2F/730	730
Vertical piece 2F/1000	1000
Vertical piece 2F/1500	1495




Mounted in ceiling with Expansion bolt alt. Concrete screw.




Cantilever arm 50 is mounted with a T-bolt.



Internal cantilever arm W17/40 is mounted with a T-bolt.





In order to reduce the deflection of Vertical piece 2F for heavy loads on Internal cantilever arm W17/40 and Adjustable cantilever arm W1840/W1860, Pendant bar 1 is installed.



End plugs

End plug to be mounted on pendant ends to provide protection against personal injury and to make the ends of the profiles more conspicuous.




Technical information

Use and installation


Pendant bar 1

Pendant bar to be installed in order to reduce the deflection of heavily loaded vertical pieces. Installed with T-bolt and Expansion bolt.

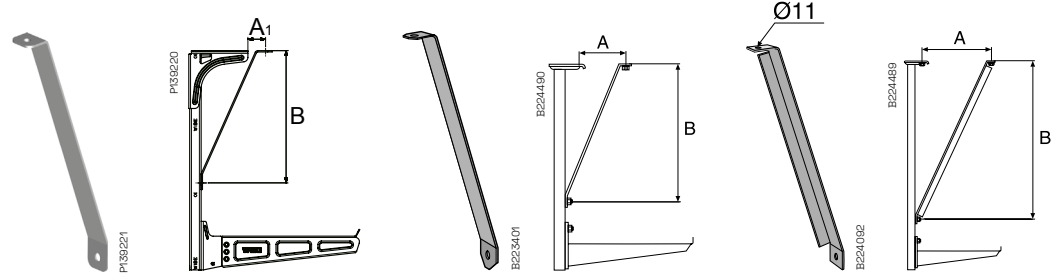


Pendant bar 1/300-800 Pre-galv.

Type	A ¹ mm	A mm	B mm
1/300	40	80	300
1/500	40	130	500
1/800	125	215	800
1/1500	Varies	Varies	Varies




To reduce deflection of Vertical piece 2Fi at heavy loads on Cantilever arm 50i the Pendant bar 1 can be used. Install with T-bolt and Expansion bolt.

Pendant bar 1/300-800 Hdg



To reduce deflection of Vertical piece 2F at heavy loads on Cantilever arm 50 the Pendant bar 1 can be used. Install with T-bolt and Expansion bolt.


Pendant bar 1-1500 Hdg




Mount this stay to reduce deflection of long Vertical pieces 2F.

Pendant joint 2J, 2FJ

Pendant joint to be used for joining pendant/fixing rails and vertical pieces.

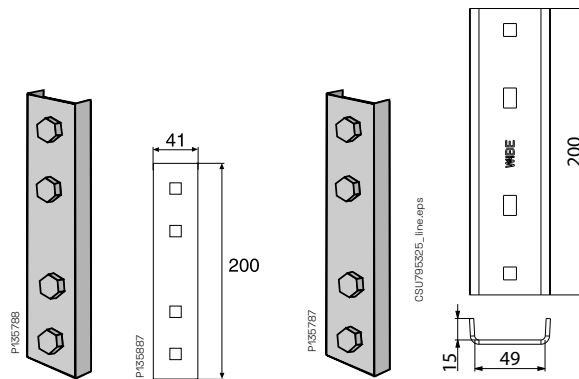


Pendant joint 2J



Pendant joint 2J, used for joining of Vertical piece 2 and Pendant/ Fixing rail 24/34.

Pendant joint 2FJ





Pendant joint 2FJ, used for joining of Vertical piece 2F, Pendant Fixing rail 24/48 and CLX³ Pendant Fixing rail 24/48..


Technical information

Use and installation

Bracket 60/40






Bracket to be used together with Pendant/fixing rail 24/34 to reduce the deflection of long vertical pieces.

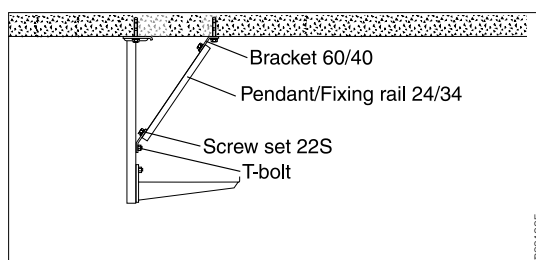


Use Bracket 60/40 with Pendant/ Fixing rail 24/34 to reduce the deflection of long pendants. Cut the pendant/fixing rail to a suitable length on site.

Pendant strip W33


Pendant strip to be used as a light-duty vertical ceiling suspension. The pendant strip is delivered in a straight length of 1 m, to be bent on site. Pendants longer than 1 m are joined by overlapping, using Screw set W36/W36C.



The Pendant strip W33 is delivered straight. Can be bent on site. Pendants longer than 1 m are joined by overlapping using Screw set W36/W36C.



If adjustment of pendant length is required this can be achieved by cutting the strip in the middle and overlapping the two parts so that a joint can be achieved using Screw set W36/W36C.






Mounted in open intersections for ceiling installation. Mounted with Screw set W36/W36C in Support bracket/joint W7.

Technical information


Use and installation

Fixing rail 24/26x53 for casting-in

Fixing rail for casting-in in wall and ceilings.






Fixing rail 24/26 x 53 for casting-in in walls and ceilings. Mount cantilever arms with T-bolt 26U.




Max. pull-out load: 1000 kg/0.5 m of casting-in fixing rail (Concrete class K200).

Locking clamp W77


Locking clamp to be used when pendant rail W32 is mounted between two parallel lighting trunking W70 or cable trays W1/W3 for additional stability.



Pendant rail W32 mounted with Screw set W36/W36C or W34.






Locking clamp W77 used when Pendant rail W32 is mounted between two Lighting trunking W70 or cable trays as a stabilizer.



Locking clamp W77 fixed to the fold of trunking/tray with a pair of pliers.

End bracket WN17

Used as vertical piece, for example mounted on Support bracket/joint W7 to achieve an concealed suspension.






End bracket WN17 can be mounted as vertical piece on Support bracket/joint W7, use Screw set W36/W36C. The end brackets are joined with 2 Screw sets 22S. Max symmetrical load on the end bracket is 100 kg at tightening torque of 10.4 Nm.

Technical information


Use and installation

Angle bracket W8


Angle bracket to be mounted inside a cable tray W1/W3 for horizontal installation to the wall or vertical installation to the floor. Can also be mounted as a pendant bracket in the lighting trunking W70.




2 Angle brackets W8 are mounted in Cable trays W1/40 or W3/40 using 2 Screw sets W38P for horizontal connection to wall and vertical connection to floor. Can be mounted with legs pointing inwards or outwards.




Angle bracket W8 mounted in bottom of lighting trunking with Screw set W36/W36C. Expansion bolts are used for installation in concrete walls. In sheet metal walls mounting is achieved with an Ogebe fixing type ED.




The Angle bracket W8 is mounted to achieve clearance from wall or where there is a large asymmetric load on the tray at pendant installation. Mounted at a distance of 1.5-2 m.



Angle bracket mounted in bottom of lighting trunking with Screw set W36/W36C as pendant attachment.



Horizontal installation of Cable tray W3/W1 on floor or vertically on wall. The angle bracket W8 can be turned to reduce the distance to floor or wall.





Horizontal installation of Cable tray W3 on floor or vertically on wall. The angle bracket W8 can be turned to reduce the distance to floor or wall.

Technical information


Use and installation

Angle bracket W8S


Universal angle bracket to be used for various installations of pendant/fixing rail 24/34, support bracket, etc.




Vertical piece 2 or Pendant/Fixing rail 24/34 can be mounted with Angle bracket W8S directly into the lighting trunking. Use Screw set 22S.




Support bracket 3 can be mounted in ceilings with Angle bracket W8S and Screw set 22S.




Support bracket W1940/W1960 can be mounted on Ceiling bracket 5 with Angle bracket W8S and Screw set 22S.




Support bracket W1940/W1960 can be mounted on Vertical piece 2 with Angle bracket W8S and Screw set 22S.



Clamp suspension of cable tray can be made with Pendant/Fixing rail 24/34, Angle bracket W8S and Screw set 22S.



Angle bracket W8S can be used for installations in Pendant/Fixing rail 24/34. Use Screw set 22S.
An easy way to build stands for electrical cabinets.



Support bracket/joint W7 can be mounted directly on Vertical piece 2 with Angle bracket W8S and Screw set 22S.
Does not apply to widths used for joining only.

Technical information

Use and installation




Lashing wire

Lashing wire to be used for lashing of cables on mounting rails or cable ladders.

Type		Diam mm	Breaking load kg
HTR - 2303	Lashing wire, stainless steel, white PVC	1.25	92
HTR - 2313	Lashing wire, stainless steel, black PVC	1.25	92
HT - 2304	Lashing wire, white PVC	1.5	25
HT - 2314	Lashing wire, black PVC	1.5	25


Technical information

Use and installation




Earth clamp W79

The earth clamp is used when protective earthing of the junction box plate is required.





Earth clamps are designed for use when protective earthing of the mounting plate is required for mounting apparatuses as per relevant heavy current directives. The oblong holes in the junction box plate (mounting plate) permit movement of the earth clamp so that it always comes under the casing of the apparatus. If the apparatus's earth clamp is not approved for joining protective earth conductors, it must pass unbroken through the apparatus's earth clamp to the junction box earth clamp (see the fig.).



Cover plate W16

Cover plate to be used to level out the differences in level between cable tray and junctions, such as 90° bends, T- and X-junctions. To be mounted under the junctions.



Mounted with Screw set W36/W36C under X-junction W13/40 if one needs to level out differences in height between tray and bend.




Type	A mm
Cover plate W16-70	70
Cover plate W16-100	100
Cover plate W16-200	200
Cover plate W16-300	300
Cover plate W16-400	400

Technical information

Use and installation

Strip fixing W44

The Strip fixing W44 enables strapping of cables in an unperforated tray.



The Strip fixing W44 is provided with double sided adhesive tape and is attached to the tray bottom. Alternatively, blind rivets or self-tapping screws can be used.

When mounting with double sided adhesive tape, the surface on the tray bottom must be wiped clean. Loads may not be applied until after 24 hours. Full adhesion is obtained after 72 hours in 21°C.




Ideal application temperature is 21°-38°C.

Application below normal room temperature not recommended.

Each Strip fixing W44 can be split up in 2 to 6 pieces. Supplied with 50 pieces in a plastic bag.

Protection strip W48


Used to protect the cables from damage.

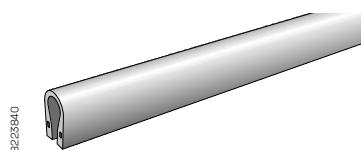

When cutting a cable tray you can mount Protection strip W48 to protect the cables from damage.

Technical information


Use and installation




B223862

Luminaire bracket W50


Luminaire bracket to be used to mount lighting fixtures between two parallel Cable trays W1/W3 or Lighting trunking W70. Dimension A (* height) is specified when ordering and is depending on the height of the lighting fixture.



B224018

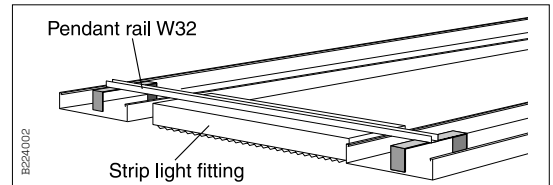


B224002




B223881

Luminaire bracket W35

Luminaire bracket to be used to fix centralized lighting fixtures under Lighting trunking W70.




B223976

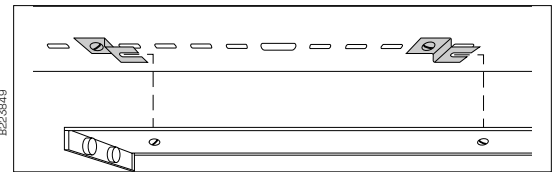

B223849


Mounted in the rail's module holes with Screw set W36/W36C or W34. Note! The fork openings must be mounted in the same direction.



B223865


Luminaire bracket W55

Luminaire bracket to be used to mount lighting fixtures under Lighting trunking W70.




B224063

Max load 50 kg



B223863

Mounted in the mounting holes in Lighting trunking W70.




B223864

Always mount the Luminaire bracket W55 from above so that it rests in the tray.



Technical information

Use and installation




Shade ledge W26/40


Shade ledge to be used as a support for ceilings mounted between cable trays with system height 40 mm. Suspended over the lateral side of the cable tray. Also suitable for Lighting trunking W70.



Shade ledge W26/40 is hung over the side edge of the cable tray.





Shade edge W26/40 is used as a support for ceilings mounted between cable trays. Also suitable for Lighting trunking W70. Mounted along the side edges of the cable tray or the lighting trunking.




Shade ledge W26/60


Shade ledge to be used as a support for ceilings mounted between cable trays with an edge height of 60 mm. Suspended over the lateral side edge of the cable tray.



Shade ledge W26/60 is hung over the side edge of the cable tray.




Shade edge W26/60 is used as a support for ceilings mounted between cable trays. Mounted along the side edges of the cable tray.



Shade list W26/40 and W26/60 can be locked tight in the tray by pinching the ends in under the tray edge with pliers.



Technical information

Use and installation




Integrated ceiling support channel W27/40


Integrated support channel to be used as a support for false ceilings mounted between cable trays with system height 40 mm. Suspended over the lateral side of the cable tray. Also suitable for Lighting trunking W70.



Integrated ceiling support channel W27/40 is hung over and mounted along the side edge of the cable tray and is used as a support for ceilings mounted between cable trays. Also suitable for Lighting trunking W70.





Integrated ceiling support channel W27/40 is locked tight in the tray by pinching the ends in under the tray edge with pliers.




Integrated ceiling support channel W27/60


Integrated support channel to be used as a support for false ceilings mounted between cable trays with system height 60 mm. Suspended over the lateral side of the cable tray.



Integrated ceiling support channel W27/60 is used as a support for ceilings mounted between cable trays. Mounted along the side edge of the cable tray.





Integrated ceiling support channel W27/40 and W27/60 can be locked tight in the tray by pinching the ends in under the tray edge with pliers.



Angle strip W46

Angle strip to be used as a support for installations of false ceilings. To be mounted directly onto a wall, or to the construction of the building.



Angle strip W46 is mounted directly onto wall, column or similar as a support for baffles or ceiling lamina.


Technical information

Use and installation




T-bolt 26U

T-bolt to be used for mounting with all vertical pieces (except Vertical piece 2) and with Pendant fixing rail 24/48.




Type	L mm	A mm
M8	34	23
M10	34	23
M10	44	33
M10	54	43


Max permitted extraction force

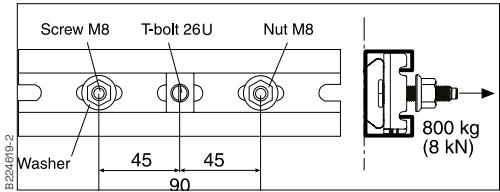

T-bolt 26U M8/M10 + P/F-rail 24/48 + Washer 8.4x19x1.5

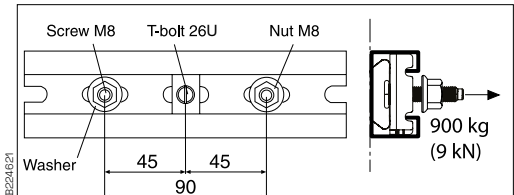


T-bolt 26U M8 + P/F-rail 24/48 + Washer 9x35x2

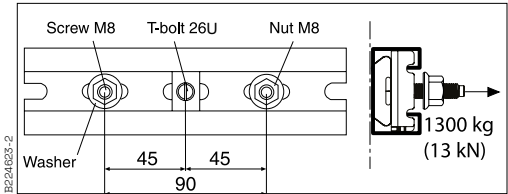

T-bolt 26U M10 + P/F-rail 24/48 + Washer 9x35x2

Technical information

Use and installation



Screw set 22S

Screw set to be used for installation of Ceiling bracket 5 on Pendant/fixing rails 24/34 and 24/48, Angle bracket 5L against the back of Pendant/fixing rails, Pendant/fixing rails back to back. Set including screw MVBF 8x16 and nut M6MF8.



Screw set W34

Screw set to be used for mounting of Angle bracket W8 onto Pendant rail W32 and for joining of W4 Installation trays. Set including screw MSCS 6x12 and nut M6MF6.




Screw set W36

Screw set including bolt and nut M8 to be used for the mounting of single Pendant attachment W21 or on Support bracket/jointW7.




Screw set W36C

Screw set including bolt with slotted screw head and nut M8. To be used for the mounting of single Pendant attachment W21 or Tube pendant attachment W73 on Support bracket/joint W7.



Screw set W37

Screw set including bolt MVBF 8x35 and nut M6MF 8, to be used for assembly of Pendant attachment W21 and Ceiling attachment W31 with Pendant rail W32, and for the joining of Pendant rail W32.



Screw set W38P

Screw set including screw and nut, to be used for the mounting of joints, bends, junctions, shade ledge W26 and integrated ceiling support channel W27. The patented screw set pierces through painted surfaces securing potential balancing. N.B. The joints must be unpainted.




Screw W40

For locking of T-joint W29 in open junctions.



T-bolt 26U

T-bolt to be used for mounting with all vertical pieces (except Vertical piece 2) and with Pendant fixing rail 24/48.



Locking plug W41

Locking plug to be used for quick locking of joints, bends and branches in cable trays and lighting trunking.

Reference number overview

70

705093.....	62
709021.....	35, 63, 72, 77

71

713153.....	61
713177.....	62
713178.....	62
713251.....	18
713252.....	18
713254.....	18
713256.....	18
713257.....	18
713258.....	18
713684.....	35, 63, 73
713685.....	35, 63, 73
713686.....	35, 63, 73
713687.....	35, 63, 73
713694.....	58, 68
713911.....	27
713912.....	27
713913.....	27
713914.....	27
713916.....	27
713917.....	27
713918.....	27
714029.....	70
715646.....	29, 49
715650.....	28, 47
715879.....	61
716283.....	70
716284.....	70
716285.....	70
716286.....	70
716287.....	70
716293.....	71
716295.....	71
716303.....	72
716304.....	72
716306.....	71
716309.....	71
716407.....	59, 68
716474.....	31, 51
716630.....	34
716634.....	30
716640.....	27, 47
716792.....	30
716793.....	30
716797.....	28
716798.....	34
716799.....	29
716799.....	49
716816.....	33
716821.....	34
716824.....	20, 40, 55
716833.....	23
716834.....	23
716835.....	23
716836.....	23
716837.....	23
716911.....	32
716912.....	32
716913.....	32
716914.....	32
717001.....	60
717021.....	21
717022.....	21
717023.....	21
717024.....	21
717069.....	59, 69
717191.....	61
717192.....	61
717193.....	61
717194.....	61
717195.....	61
717196.....	61
717197.....	61
717198.....	61
717199.....	61
717200.....	61
717201.....	70
717202.....	70
717203.....	70

717204.....	70
717205.....	70
717640.....	62
717641.....	62
717642.....	62
717643.....	72
717644.....	72
717645.....	72
717903.....	23
717904.....	23
717905.....	23
717906.....	23
717907.....	23
717908.....	24
717909.....	24
717910.....	24
717911.....	24
717912.....	24
717913.....	24
717914.....	24
717915.....	24
717916.....	24
717917.....	24
717950.....	40
717990.....	28
717995.....	27
718036.....	24
718037.....	24
718038.....	24
718039.....	24
718040.....	24
718193.....	27
718205.....	22
718360.....	32
718361.....	32
718445.....	21
718446.....	21
718447.....	21
718448.....	21
718469.....	35, 53, 63, 73
718473.....	29, 49
718556.....	28
718559.....	28
718640.....	61
718645.....	49, 59, 68
718645.....	29
718711.....	31
718828.....	20, 41
718829.....	20, 41
718830.....	20, 41
718831.....	20, 41
718832.....	20, 41
718833.....	20, 41
718834.....	20, 41
718835.....	20
718903.....	62
718904.....	62

72

720520.....	28
720530.....	72
720531.....	72
720785.....	47
720822.....	18
720825.....	21
720970.....	31
720973.....	31
720979.....	28, 48
720984.....	18
720985.....	18
720990.....	21
721101.....	33
721102.....	34
721180.....	31
721184.....	23
721186.....	24
721188.....	24
721786.....	33
721868.....	29, 49
721943.....	31
723180.....	21
723196.....	23
723198.....	24
723200.....	24

723219.....	18
723226.....	25
723227.....	25
723228.....	25
723229.....	25
723230.....	25
723231.....	25
723232.....	25
723432.....	60
723433.....	60
723434.....	60
723436.....	60
723437.....	60
723438.....	60
723439.....	60
723440.....	69
723441.....	69
723442.....	69
723444.....	69
723445.....	69
723446.....	69
723447.....	69
723938.....	59, 69
723974.....	18
723975.....	18
723976.....	18
723977.....	18
724806.....	30, 50
724807.....	75
724942.....	42
724943.....	42
724944.....	42
724945.....	42
724946.....	42
724947.....	42
724948.....	42
724965.....	23
724966.....	23
725079.....	30, 50
725083.....	30, 50
725084.....	75
725085.....	59, 69
725357.....	34
725358.....	34
725359.....	34
725360.....	34
725361.....	34
725362.....	33
725557.....	76
725558.....	76
725559.....	76
725560.....	76
725561.....	76
725562.....	76
725563.....	76
725564.....	76
725565.....	76
725566.....	76
725573.....	76
725574.....	76
725575.....	76
725576.....	76
725577.....	76
725578.....	76
725579.....	76
725580.....	77
725581.....	75
725582.....	75
725585.....	77
725586.....	75
725589.....	75
725618.....	75
725619.....	75
725620.....	75
725622.....	75
725623.....	75
725624.....	75
725625.....	75
725785.....	20
725786.....	40
726484.....	77
726485.....	77
726664.....	18
726665.....	18
726666.....	18

726667.....	18
726873.....	63
726874.....	53
726875.....	77
728071.....	34
728595.....	76
728883.....	63
728986.....	38
728987.....	38
728988.....	38
728989.....	38
728990.....	38
728991.....	38
728992.....	38
729015.....	40
729016.....	40
729017.....	40
729018.....	40
729019.....	40
729020.....	40
729021.....	40
729027.....	51
729028.....	51
729029.....	52
729030.....	52
729031.....	52
729032.....	52
729033.....	52
729034.....	52
729041.....	51
729042.....	51
729043.....	51
729044.....	51
729045.....	70
729046.....	41
729047.....	41
729048.....	41
729049.....	41
729050.....	41
729051.....	41
729052.....	41
729054.....	53
729055.....	50
729058.....	53
729059.....	53
729060.....	48
729061.....	50
729062.....	50
729063.....	53
729066.....	53
729094.....	42
729103.....	43
729104.....	43
729105.....	43
729106.....	43
729107.....	43
729108.....	43
729109.....	43
729126.....	45
729127.....	45
729128.....	45
729129.....	45
729130.....	45
729131.....	45
729132.....	45
729133.....	43
729134.....	43
729135.....	43
729136.....	43
729137.....	43
729138.....	43
729139.....	44
729140.....	44
729141.....	44
729142.....	44
729143.....	44
729144.....	44
729145.....	44
729146.....	44
729147.....	44
729148.....	44
729149.....	44
729150.....	44
729151.....	44
729152.....	44

729154.....	44
729155.....	44
729156.....	44
729157.....	44
729158.....	44
729177.....	46
729178.....	46
729179.....	46
729180.....	46
729181.....	46
729182.....	46
729183.....	46
729184.....	47
729185.....	47
729186.....	47
729187.....	47
729188.....	47
729189.....	47
729190.....	47
729191.....	47
729192.....	48
729193.....	48
729201.....	43

73

730186.....	20, 40, 54, 65
730191.....	55
730247.....	27
731717.....	34
731719.....	62
731721.....	34
731724.....	71
731727.....	76
731730.....	26
731731.....	26
731732.....	26
731733.....	26
731734.....	26
731735.....	26
731736.....	26
731747.....	55
731963.....	27
731964.....	47
732177.....	33
732214.....	20
732215.....	20
732216.....	20
732217.....	20
732218.....	20
732219.....	20
732220.....	20
732221.....	20
732983.....	55
733090.....	33
733480.....	23
733485.....	24
733486.....	53
733487.....	61
733498.....	25
733499.....	25
734101.....	45, 57
734102.....	57
734103.....	57
734104.....	57
734105.....	57
734106.....	57
734107.....	57
734108.....	57
734109.....	57
734134.....	40
734211.....	47
734227.....	27
734228.....	47
734401.....	31
734402.....	31
734403.....	31
734452.....	59
734453.....	59
734454.....	59
734455.....	59
734456.....	59
734457.....	59
734554.....	21
734555.....	21

Reference number overview

734572	60	739713	53, 73	782285	27	782475	43	783178	22
734573	60			782286	27	782476	43	783179	22
734574	60			782287	27	782477	43	783180	22
734575	60			782288	27	782478	43	783181	22
734578	60			782289	27	782593	45	783182	22
734579	60			782290	27	782594	45	783183	22
734580	60			782292	26	782595	45	783184	22
734581	60			782293	26	782596	45	783185	42
734582	60			782294	26	782597	45	783186	42
734583	60			782295	26	782598	45	783187	42
734584	23			782296	26	782599	45	783188	42
734585	23			782297	26	782600	45	783189	42
734591	56			782298	26	782614	47	783190	42
734592	56			782299	20	782615	47	783191	42
734593	56			782306	39	782616	47	783470	74
734594	56			782307	39	782617	47	783471	74
734595	56			782308	39	782618	47	783472	74
734596	56			782309	39	782619	47	783473	74
734597	56			782310	39	782620	47	783474	74
734598	56			782311	39	782659	47	783475	74
734599	56			782318	41	782661	48	783476	74
734617	58			782319	41	782662	48	783477	74
734618	62			782320	41	782850	66	783487	74
734619	61			782321	41	782851	66	783500	29, 49
734620	61			782322	41	782852	66	783504	52
734622	56			782323	41	782853	66	783505	52
734646	58, 68			782324	41	782854	66	783506	52
735177	29, 58, 68			782325	41	782855	66	783507	52
735388	19			782330	41	782856	66	783508	52
735389	19			782332	31	782857	66	783509	52
735390	19			782333	31	782858	66	783587	32
735391	19			782334	31	783000	68	783588	32
735392	19			782335	31	783001	68	783589	32
735393	19			782336	31	783002	68	783590	32
735394	19			782337	31	783003	68	783591	52
735395	19			782342	31	783004	68	783592	52
735396	19			782343	31	783005	68	783593	52
735400	54			782363	65	783006	68	783594	52
735401	54			782364	65	783007	68	783600	66
735402	54			782365	65	783018	70	783601	66
735403	54			782366	65	783019	70	783602	66
735404	54			782367	65	783020	70	783603	66
735405	54			782368	65	783021	70	783604	66
735406	54			782369	65	783022	70	783605	66
735407	54			782370	65	783023	70	783606	66
735408	54			782392	32	783030	58	783607	66
735988	19			782393	32	783031	58	783608	66
735989	19			782394	32	783032	58	783620	66
735990	19			782395	32	783033	58	783621	66
735991	19			782396	32	783034	58	783622	66
735992	19			782397	32	783035	58	783623	66
735993	19			782408	43	783036	58	783624	66
735999	64			782409	43	783037	58	783625	66
736000	64			782410	43	783040	67	783626	66
736001	64			782411	43	783041	67	783627	66
736002	64			782412	43	783042	67	783628	66
736003	64			782413	43	783043	67	783640	67
736004	64			782414	43	783044	67	783641	67
736005	64			782415	43	783045	67	783642	67
736006	64			782424	44	783046	67	783643	67
736603	19			782425	44	783047	67	783644	67
736604	19			782426	44	783048	67	783645	67
736605	19			782427	44	783060	69	783646	67
736606	19			782428	44	783061	69	783647	67
736607	19			782429	44	783062	69	783648	67
736608	19			782430	44	783063	69	783660	56
736609	19			782431	44	783064	69	783661	56
736610	19			782440	44	783065	69	783662	56
736633	39			782441	44	783066	70	783663	56
736634	39			782442	44	783067	70	783664	56
736635	39			782443	44	783068	70	783665	56
736636	39			782444	44	783069	70	783666	56
736637	39			782445	44	783107	71	783667	56
736638	39			782446	44	783120	71	783668	56
736639	39			782447	44	783122	71	783670	56
736640	39			782458	23	783124	72	783671	56
737537	39			782459	23	783126	72	783672	56
737538	39			782460	24	783128	65	783673	56
737539	39			782461	24	783130	68	783674	56
737540	39			782462	24	783166	51	783675	56
737541	39			782463	24	783167	51	783676	56
737542	39			782471	43	783168	51	783677	56
737543	39			782472	43	783169	51	783678	56
737544	39			782473	43	783170	51	783680	57
737545	39			782474	43	783171	51	783681	57

Reference number overview

783682	57	787188	43
783683	57	787189	43
783684	57	787192	44
783685	57	787193	44
783686	57	787196	44
783687	57	787197	44
783688	57	787211	35, 53, 63, 73, 77
783753	51	787227	39
783754	51	787228	39
783884	74	787229	39
783885	74	787230	39
783886	74	787231	39
783887	74	787232	39
783888	74	787276	61
783889	74	787277	70
783890	74	787278	76
783891	74	787436	26
783900	74	787437	26
783901	74	787438	46
783902	74	787439	46
783903	74	787442	26
783904	74	787443	26
783905	74	787444	46
783906	74	787445	46
783907	74	788572	22
783908	57	788573	55
783909	57	788574	41
783910	57	788575	65
783911	57	789875	35, 63, 72, 77
783912	57		
783913	57		
783914	57		
783915	57		
783916	57		
784061	30, 50		
784062	30, 50		
784063	30, 50		
784073	23		
784074	23		
784075	23		
784076	23		
784077	23		
784078	23		
784079	23		
784080	23		
784089	25		
784090	25		
784091	25		
784092	25		
784093	25		
784094	25		
784095	25		
784096	25		
784105	45		
784106	45		
784107	45		
784108	45		
784109	45		
784110	45		
784111	45		
784112	45		
784113	43		
784114	43		
784115	43		
784116	43		
784117	43		
784118	43		
784119	43		
784120	43		
786771	46		
786772	46		
786773	46		
786774	46		
786775	46		
786776	46		
786777	46		
786792	32		
786793	52		
786831	18		
786832	18		
786833	38		
786834	38		
786837	21		
786838	41		
786873	40		

79

790231	65
790984	22
790985	22
790986	22
790987	22
790988	22
790989	22
790990	22
791205	30
791207	50
791273	55
791274	55
791275	55
791276	55
791277	55
791278	55
791279	55
791280	55
791281	55
791282	65
791283	65
791284	65
791285	65
791286	65
791287	65
791288	65
791289	65
791290	65
791412	32
791413	32
791414	32
791415	32
791416	52
791417	52
791418	52
791419	52
792554	33
792723	33
792724	33
792725	33
792726	33
792727	34
792728	34
792729	34
792934	30, 50
792935	30, 50
793571	26
793572	26
793573	26
793574	26
793575	26
793576	26
793577	26

793578	26
793579	46
793580	46
793581	46
793582	46
793583	46
793584	46
793585	46
793586	46
793587	58
793588	58
793589	58
793590	58
793591	58
793592	58
793593	58
793594	58
793595	58
793596	58
793597	67
793598	67
793599	67
793600	67
793601	67
793602	67
793603	67
793604	67
793605	67
793606	67
793607	26
793608	26
793609	26
793610	26
793611	26
793612	26
793613	26
793614	26
793615	46
793616	46
793617	46
793618	46
793619	46
793620	46
793621	46
793622	46
793669	67
793670	67
793671	67
793672	67
793673	67
793674	67
793675	67
793676	67
793677	66
793678	66
793679	66
793680	66
793681	66
793682	66
793683	66
793684	66

11

1149405	30, 50
1149456	30, 50
1149464	30, 50
1149466	30, 50
1149551	75
1149552	75
1149554	75
1149561	75
1149562	75
1149564	75

CSU

CSU734698	59, 69
CSU794123	20
CSU794124	20
CSU794125	20
CSU794184	40
CSU794185	40
CSU794186	40
CSU794528	54
CSU794529	54
CSU794531	64
CSU794532	64
CSU794697	59, 69
CSU794699	59, 69
CSU794715	59, 69
CSU795136	21, 55
CSU795216	20
CSU795217	40
CSU795218	54
CSU795219	64
CSU795316	60
CSU795317	60
CSU795318	60
CSU795319	60
CSU795320	60
CSU795321	60
CSU795322	32
CSU795323	32
CSU795325	34
CSU795328	77
CSU795370	32, 52, 60, 70
CSU795371	32
CSU795372	52
CSU795377	32, 60
CSU795378	52, 70
CSU795379	23
CSU795380	43
CSU795381	56
CSU795382	66
CSU795383	24
CSU795384	44
CSU795385	56
CSU795386	66
CSU795387	24
CSU795388	44
CSU795389	57
CSU795390	67
CSU795564	34
CSU795565	62, 71, 76
CSU795566	76
CSU795568	71
CSU795588	29, 49
CSU795589	59, 68
CSU795590	59, 68
CSU795591	59, 68
CSU795592	75
CSU795593	75
CSU795594	29, 49
CSU795595	59, 68
CSU795596	75
CSU795597	63
CSU795632	37
CSU795633	37
CSU795634	37
CSU795635	37
CSU795636	37
CSU795637	37
CSU795638	37
CSU795639	37
CSU795640	37
CSU795641	37
CSU795653	37
CSU795654	37
CSU795660	37
CSU795661	37
CSU795662	37
CSU795663	37
CSU795664	37
CSU795700	37
CSU795867	58
CSU795870	27
CSU795871	58
CSU795931	35, 63
CSU795992	54

CSU795993	54
CSU795994	54
CSU795995	54
CSU795996	54
CSU795998	54
CSU795999	54
CSU796000	54
CSU796001	54
CSU796002	54
CSU796004	54
CSU796005	54
CSU796006	56
CSU796007	56
CSU796008	56
CSU796009	56
CSU796010	56
CSU796012	56
CSU796013	56
CSU796014	57
CSU796015	57
CSU796016	57
CSU796017	57
CSU796018	57
CSU796020	57
CSU796021	57
CSU796022	54
CSU796023	54
CSU796024	54
CSU796025	54
CSU796026	54
CSU796027	54
CSU796028	54
CSU796029	54
CSU796046	27
CSU796047	58

