

Product data sheet

Specifications



power supply module, Modicon X80, 100 to 240V AC, 36W

BMXCPS3500

Main

| | |
|---------------------------|---|
| Range of product | Modicon X80 |
| Product or component type | Power supply module |
| backplane compatibility | Not compatible with BMEXBP..02 |
| Primary voltage | 100...240 V |
| Supply circuit type | AC |
| Secondary power | 15 W 3.3 V DC I/O module logic power supply 31.2 W 24 V DC I/O module power supply and processor 21.6 W 24 V DC sensor power supply |

Complementary

| | |
|--------------------------------|---|
| Primary voltage limit | 85...264 V |
| Network frequency | 50/60 Hz |
| Network frequency limits | 47...63 Hz |
| Apparent power | 0.12 kVA |
| Input current | 0.52 A 240 V 1.04 A 115 V |
| Inrush current | 30 A 120 V 60 A 240 V |
| I ² t on activation | 1 A ² .s 120 V 3 A ² .s 240 V |
| It on activation | 0.05 A.s 120 V 0.07 A.s 240 V |
| MTBF reliability | 4300000 H |
| Protection type | Internal fuse not accessible for primary circuit Overload protection for secondary circuit Overvoltage protection for secondary circuit Short-circuit protection for secondary circuit |
| Current at secondary voltage | 0.9 A 24 V DC sensor power supply 1.3 A 24 V DC I/O module power supply and processor 4.5 A 3.3 V DC I/O module logic power supply |
| Maximum power dissipation in W | 8.5 W |
| Status LED | 1 LED (green) rack voltage OK 1 LED (green) sensor voltage |
| Control type | RESET push-button cold restart |
| Electrical connection | 1 connector 2 pin(s)alarm relay 1 connector 5 pin(s)line supply, protective earth, 24 V DC input sensor |
| Insulation resistance | >= 100 MOhm primary/ground >= 100 MOhm primary/secondary |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|------------|---------|
| Net weight | 0.36 kg |
|------------|---------|

Environment

| | |
|---------------------------------------|--|
| Immunity to microbreaks | 1 ms |
| Dielectric strength | 1500 V primary/secondary I/O module logic power supply 1500 V primary/secondary I/O module power supply and processor 2300 V primary/secondary sensor power supply 1500 V primary/ground 500 V 24 V sensor output/ground |
| Vibration resistance | 3 gn |
| Shock resistance | 30 gn |
| IP degree of protection | IP20 |
| Directives | 2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility |
| Ambient air temperature for storage | -40...85 °C |
| Ambient air temperature for operation | 0...60 °C |
| Relative humidity | 5...95 % at 55 °C without condensation |
| Protective treatment | TC |
| Operating altitude | 0...2000 m 2000...5000 m with derating factor |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 13.000 cm |
| Package 1 Width | 15.500 cm |
| Package 1 Length | 15.500 cm |
| Package 1 Weight | 530.000 g |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 12 |
| Package 2 Height | 30.000 cm |
| Package 2 Width | 40.000 cm |
| Package 2 Length | 60.000 cm |
| Package 2 Weight | 7.520 kg |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 48 |
| Package 3 Height | 75.000 cm |
| Package 3 Width | 60.000 cm |
| Package 3 Length | 80.000 cm |
| Package 3 Weight | 41.000 kg |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 457

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 41745a42-b2d7-4938-80f8-0738cea8ed1d

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

End of life manual availability [End of Life Information](#)

Take-back No

Dimensions Drawings

Modules Mounted on Racks

Dimensions



(1) With removable terminal block (cage, screw or spring).

(2) With FCN connector.


(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

| Rack references | a in mm | a in in. |
|----------------------------|---------|----------|
| BMXXBP0400 and BMXXBP0400H | 242.4 | 09.54 |
| BMXXBP0600 and BMXXBP0600H | 307.6 | 12.11 |
| BMXXBP0800 and BMXXBP0800H | 372.8 | 14.68 |
| BMXXBP1200 and BMXXBP1200H | 503.2 | 19.81 |

Connections and Schema

Connection of Alternating Current Power Supply Modules

Connection of a PLC Station Constituted of a Single Rack

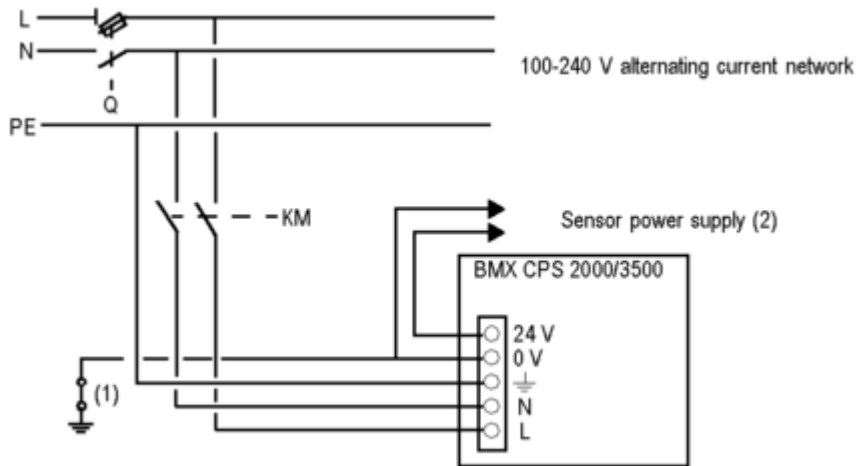


Q General isolator

KM Line contactor or circuit breaker

(1) Insulation connector bar for locating grounding errors

(2) Available current of 0.45 A for the BMXCPS2000 module or 0.9 A for the BMXCPS3500 module

Connection of a PLC Station Constituted of Several Racks

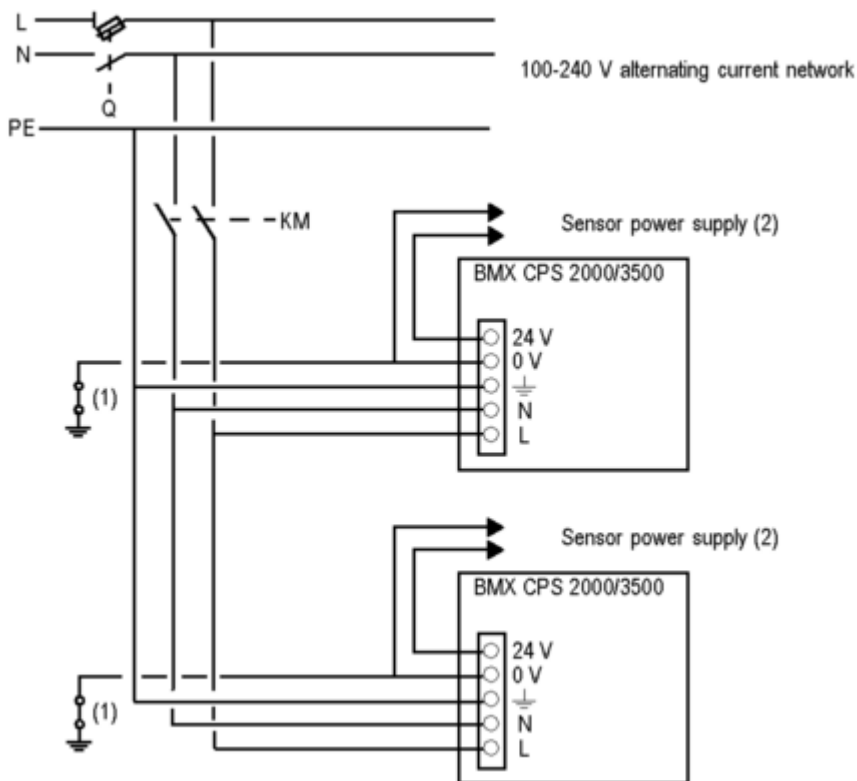

Q General isolator

KM Line contactor or circuit breaker

(1) Insulation connector bar for locating grounding errors

(2) Available current of 0.45 A for the BMXCPS2000 module or 0.9 A for the BMXCPS3500 module

Image of product / Alternate images

Alternative

