
YA392TC38, Compression Terminal, 750 kcmil Cu, 2-Hole, 3/8" Stud, 1" Spacing, Long Barrel

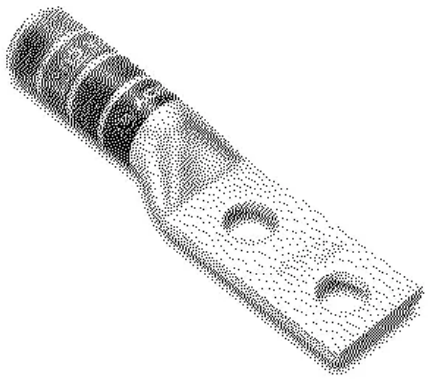

By Burndy
Catalog # YA392TC38

750 kcmil CU, Two Hole, 3/8 Stud Size, 1 Hole Spacing, Long Barrel Internal Chamfer, Tin Plated, UL/CSA, 90°C, Up to 35kV, Black Color Code, 24 Die Index.

Features

- Barrel designed with internal chamfer at wire entry for smooth insertion of wire, preventing possible damage of the strands
- Long barrel length allows for an increased number of crimps increasing the mechanical strength of the connection
- Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements
- Connectors are clearly marked with stamping and barrel color coding
- 2-Hole design prevents rotation

Application

Wire Termination

General

Catalog Number	YA392TC38
Color Code	Black
Die Index	24
Feature - Barrel Style	Chamfered
Feature - Barrel Type	Long
Finish Type	Tin-Plated
Material	COPPER
Physical Attribute - Number of Holes	2
Physical Attribute - Tongue Type	Standard
Trade Name	HYLUG™
Type	Long Barrel, Tin Plated
UPC	781810821244
UPC 14 Digit GTIN	00781810821244

Dimensions

Dimension - B Length fraction	2-7/8 in
Dimension - Bolt Hole Size inch	0.39 in
Dimension - Bolt Size fraction	3/8
Dimension - Bolt Size inch	0.38
Dimension - Hole Size fraction	3/8
Dimension - Hole Size inch	0.41
Dimension - Hole Size mm	10.4 mm
Dimension - N inch	0.50 in
Dimension - Outside Diameter inch	1.30 in
Dimension - Pad Width inch	1.63 in
Dimension - Strip Length inch	2-15/16
Dimension - Stud Size fraction	3/8
Dimension - Stud Size inch	3/8
Dimension - Z (inch)	0.53 in
Physical Attribute - Tongue Angle	Straight

Electrical Ratings

Voltage - Maximum	35000
Voltage Rating	35 kV

Conductor Related

Conductor - Copper DLO Size Range	N/A
Conductor - Copper Str Size Range	750 kcmil
Conductor - Material	COPPER
Conductor Type	CODE

Certifications And Compliance

Buy America(n) Qualified	TAA Compliant (All status valid till December 2025)
Industry Standard(s)	UL 486A-486B
Standards - Industry Standards Met	UL 486A-486B
Standards - RoHS Compliance Status	CM
UL Listed	Yes

Logistics

Carton Quantity	6
Minimum Pack Quantity	1

Product Assets

Catalogs - BURNDY Master Catalog - Section C - Compression Connections

Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog
Customer Notices - Prop 65 Notice
Installation Manuals - Copper Code Long Terminals Tooling and Installation Instructions
Installation Manuals - Medium & Large HYDENT Copper & Aluminum Terminal Crimp Instructions with 750 Series 12-Ton Tool
Interactive Catalog - BURNDY Full-Line Digital Catalog
Sales Drawings - SE..208777-01
Specifications - YA392TC38
Video - HYDENT Compression Terminal Overview Video

A Hubbell brand

©2025 Hubbell Incorporated. All rights reserved