

10570 BK
Wire Module
shown in Black

10569 BRZ
Master Switch
(optional)
shown in Bronze

10571 BK
Interconnect
Cable

10565 BRZ
Fixture
shown in Bronze

STEP 2

INTERCONNECT CABLES CONNECT MULTIPLE FIXTURES

Cord & Plug Fixture Xenon

10562 WH



- 1 light, 7" L x 5" W x 1" H , 36" power cord
- 12 Volt, 18 Watt Xenon bulb included

10561 WH



- 2 light, 13" L x 5" W x 1" H , 36" power cord
- 12 Volt, 18 Watt Xenon bulbs included

10560 WH



- 3 light, 22" L x 5" W x 1" H, 36" power cord
- 12 Volt, 18 Watt Xenon bulbs included

10586 WH



- 4 light, 30-1/2" L x 5" W x 1" H 36" power cord
- 12 Volt, 18 Watt Xenon bulbs included

Replacement Bulbs

10574 CLR - Replacement Bulb

- 12 Volt, 18 Watt Xenon, clear

B **10571 BK, WH – Interconnect 9 Inches**
10572 BK, WH – Interconnect 14 Inches
10573 BK, WH – Interconnect 21 Inches

- For longer interconnect cable lengths, multiple cables may be connected together



10571 BK, WH
Interconnect Cable
shown in White




10572 BK, WH
Interconnect Cable
shown in White



10573 BK, WH
Interconnect Cable
shown in White

FRONT MOUNT DESIGN – USE WIRE MODULE AND INTERCONNECT CABLES

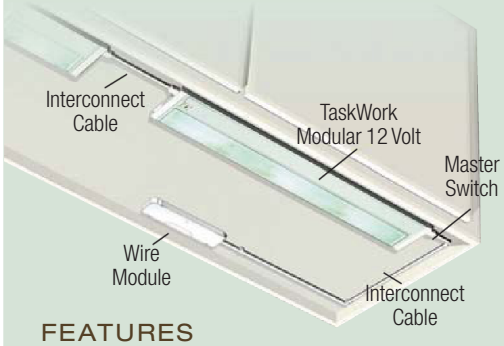


FEATURES

- 1" Profile x 5" W
- 12 Volt, 18 Watt Xenon bulb(s) included
- Unique front-mount design as recommended by the American Lighting Association
- Ability to snap fixtures together to create an even flow of light
- Captive screws for ease of installation
- Durable, Anodized Brushed Bronze, Nickel or Powder-Coated White finish
- Extruded aluminum construction
- Hinged tempered glass diffuser
- High/Low/On-Off Switch
- Built-in electronic transformer
- cUL Listed

PERFORMANCE DATA (10564)

	LUMENS/WATT	6
A	LIGHT OUTPUT FC (COUNTER FRONT)	21.3
B	LIGHT OUTPUT FC (COUNTER MIDDLE)	45.6
C	LIGHT OUTPUT FC (COUNTER BACK)	59.4
D	LIGHT OUTPUT FC (COUNTER WALL)	29.5
	CRI (COLOR RENDERING)	100
	CCT (COLOR TEMPERATURE)	2700K
	LIGHT SOURCE LIFE (HRS)	10,000

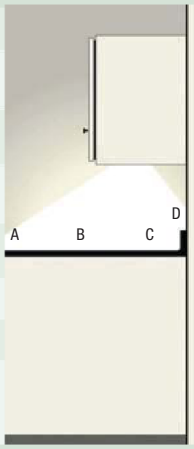



10584 BZ
Fixture
shown in Bronze

STEP 1

SELECT APPROPRIATE LIGHT FIXTURE SIZE & FINISH. DETERMINE DIRECT WIRE OR CORD & PLUG POWER SUPPLY.

TaskWork Direct Wire 12 Volt Xenon offers you a simple installation solution for illuminating a task area or adding ambient lighting.

10579 BZ, SS, WH 7"
- 1 light, 7" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulb included

10580 BZ, SS, WH 12-1/4"
- 2 light, 12-1/4" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

10581 BZ, SS, WH 21-1/2"
- 3 light, 21-1/2" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

10584 BZ, SS, WH 30"
- 4 light, 30" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

10595 BZ, SS, WH 40"
- 5 light, 40" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

AVAILABLE FINISHES

Bronze (BZ), Brushed Stainless Steel (SS) and White (WH)

BZ



SS



WH



Accessories

10582 WH - 38" Power Cord and Plug Accessory (not shown)

10588 SI - Duplex BX Cable Connector
- Connects two cables to any convenient wireway knockouts located on the fixture. This allows for a group of fixtures in a series using a single knockout. Connectors listed for use with 14-2 steel armored cable, 3/8" trade size reduced wall flexible steel, aluminum conduit or steel flexible metal conduit (not shown)

10589 SI - Connector for NM & BX Cable
- **UL approved for both non-metal (NM) & BX cables**
- Connects a single cable convenient wireway knockouts located on the fixture (not shown)

Replacement Bulbs

10574 CLR - Replacement Bulb
- 12 Volt, 18 Watt Xenon, clear

BACK MOUNT DESIGN



FEATURES

- 1" Profile x 5" W
- 12 Volt, 18 Watt Xenon bulb(s) included
- Durable, Brushed Stainless Steel, Powder-Coated White or Bronze finishes
- Fastener-free hinge assembly
- Keyhole mounting
- Easy-lock poly-tempered glass diffuser
- UL listed NM & BX single cable connector included
- High/Low/On-Off Switch
- Built-in electronic transformer
- cUL Listed

PERFORMANCE DATA (10580)

	LUMENS/WATT	6.1
A	LIGHT OUTPUT FC (COUNTER FRONT)	14.1
B	LIGHT OUTPUT FC (COUNTER MIDDLE)	31.2
C	LIGHT OUTPUT FC (COUNTER BACK)	47.3
D	LIGHT OUTPUT FC (COUNTER WALL)	17.8
	CRI (COLOR RENDERING)	100
	CCT (COLOR TEMPERATURE)	2700K
	LIGHT SOURCE LIFE (HRS)	10,000

