

# Product data sheet

Specifications

**SQUARE D**



Meter mains, QO, CSED, ringed socket, 200A, surface mount, no bypass, main breaker installed

CQRA200

**Product availability: Stock - Normally stocked in distribution facility**

## Complementary

Network number of phases	1
Height	18.23 in (463.04 mm)
Width	19.58 in (497.33 mm)
Depth	4.37 in (111.00 mm)

## Environment

Product certifications	UL E-6294
------------------------	-----------

## Ordering and shipping details

Category	US1DE3A00022
Discount Schedule	DE3A
GTIN	047569291807
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.50 in (13.970 cm)
Package 1 Width	20.30 in (51.562 cm)
Package 1 Length	20.80 in (52.832 cm)
Package weight(Lbs)	29.350 lb(US) (13.313 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	32
Package 2 Height	40.00 in (101.600 cm)
Package 2 Width	40.00 in (101.600 cm)
Package 2 Length	48.00 in (121.920 cm)
Package 2 Weight	939.999 lb(US) (426.376 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Compliant with Exemptions

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture

Circularity Profile

No need of specific recycling operations

Take-back

No

Technical Illustration


Dimensions

---

Technical Illustration

Wiring diagram

---

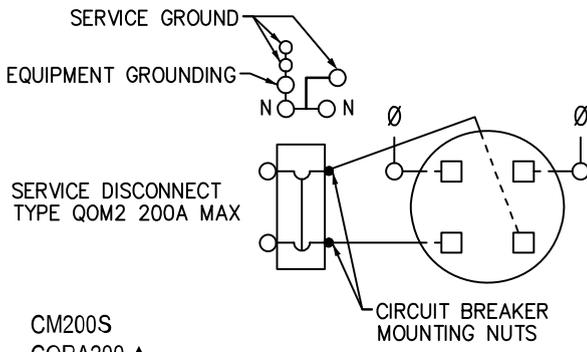


CM200S  
CQRA200 ▲

▲ 200A Breaker (QOM2200VH) IS FACTORY INSTALLED IN CQRA200

Image of product / Alternate images

Alternative

---

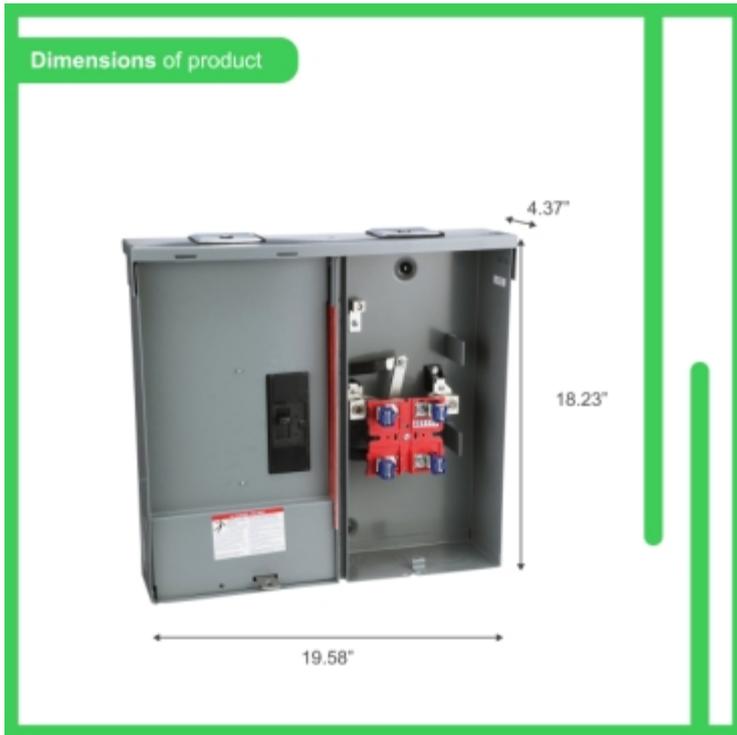

**200 A**

120/240 V~, 1Ø,  
50/60 Hz., 3 wires/hilos  
208Y/120 V~, 1Ø,  
50/60 Hz., 3 wires/hilos

**Main Breaker**  
Interruptor  
Principal

**Rainproof**  
Resistente a la  
intemperie

**Ring Type**  
Tipo anillo

**Underground  
or Overhead**  
Aérea o Subterránea

INCLUDES INCLUIDOS



Surface  
Sobreponer  
4-jaw meter socket  
Base de medición con 4 mordazas  
29 lbs / 12.9 kg  
W18.1" x H19.0" x D4.3"

