

# Product data sheet

Specifications

SQUARE D



Individual meter socket, ringless socket, horn bypass, 4 jaws no release, OH, UG, 125 A, up to 600 VAC single phase 3W

UHTRS101B

Product availability: Stock - Normally stocked in distribution facility

## Main

Product or Component Type	Meter Socket
Meter socket type	Ringless
Hub type	A ACP closing plate

## Complementary

Meter socket rated current	125 A
Number of jaws	4 without jaw release
Bypass type	Horn bypass
Phase	1 phase
[Ue] rated operational voltage	600 V AC
Enclosure Material	Steel
Box number	1R
Electrical connection	Lugs slotted
Service feed location	UG OH
Wiring configuration	3-wire
Height	10.88 in (276.35 mm)
Width	8.00 in (203.20 mm)
Depth	3.50 in (88.90 mm)

## Environment

Product Certifications	UL Listed
Enclosure Rating	NEMA 3R

## Ordering and shipping details

Category	US10DE400039
Discount Schedule	0DE4
GTIN	785901911630
Returnability	Yes
Country of origin	US

## Packing Units

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	4.700 in (11.938 cm)
<b>Package 1 Width</b>	8.700 in (22.098 cm)
<b>Package 1 Length</b>	12.400 in (31.496 cm)
<b>Package weight(Lbs)</b>	6.889 lb(US) (3.125 kg)
<b>Unit Type of Package 2</b>	PAL
<b>Number of Units in Package 2</b>	108
<b>Package 2 Height</b>	40.000 in (101.600 cm)
<b>Package 2 Width</b>	40.000 in (101.600 cm)
<b>Package 2 Length</b>	48.000 in (121.920 cm)
<b>Package 2 Weight</b>	745.000 lb(US) (337.926 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------


## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.


[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better


 <b>Materials and Substances</b>	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Nickel (Metallic), which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

### Use Again

 <b>Repack and remanufacture</b>	
Take-back	No

Dimensions Drawings

Approximate Dimensions

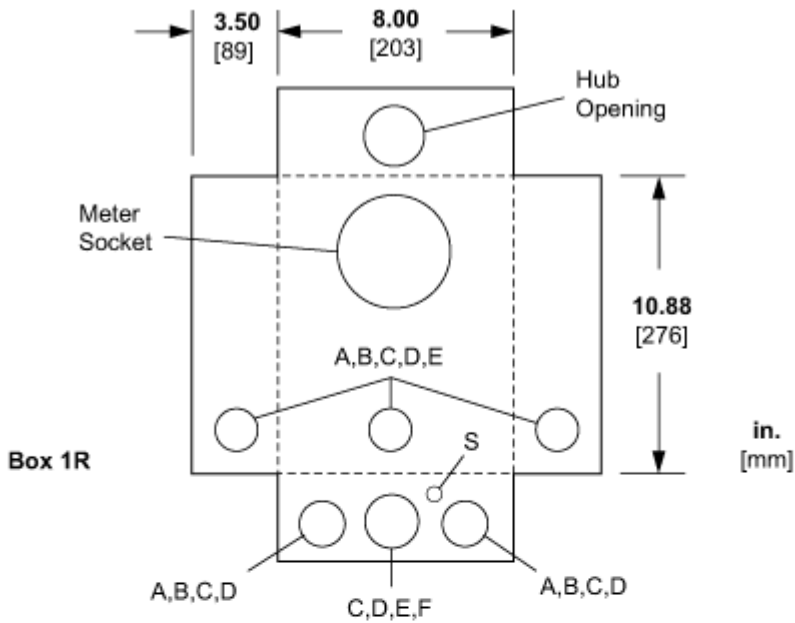

Knockouts

Symbol	A	B	C	D	E	F	S *
Conduit size (in.)	1/2	3/4	1	1-1/4	1-1/2	2	5/16

\* Knockout for grounding conductor

Hubs

(Series A - listed by conduit size)

Description	Catalog No.
1.00 in.	A100
1.25 in.	A125
1.50 in.	A150
2.00 in.	A200
2.50 in.	A250

Closing Plates

(to seal hub openings)

Description	Catalog No.
Steel	ACP
Aluminum	ACPA