




CT50175MH10C, Cable Tie, 1.75" Max Bundle, 50 Lb Tensile, Natural, Screw Mount

By Burndy
Catalog # [CT50175MH10C](#)

Nylon UNIRAP™ Cable Tie - 50 Lb. Tensile Strength (Screw Mount)

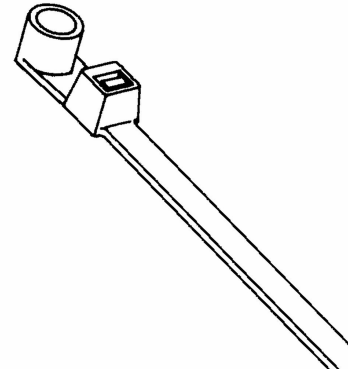

Features

- Screw Mounting Hole
- Suitable for General Use

Application

For Screw Mount

Specifications

Buy American Compliant	Contact Manufacturer
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Buy America(n) Qualified	Contact Manufacturer
Certification - ETL	No
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	No
Certification - 94V0 Rated	N
UL Listed	No
Certification - UV Rated	No

Configuration

Mounting Method	Screw
-----------------	-------

Dimensions

Dimension - L Length Overall mm	203 mm
Dimension - Screw Size inch	#10
Width	0.18 in
Dimension - Width inch	0.17 in
Dimension - Width mm	4 mm
Length	8.5 in

Dimension - Bundle Diameter Max inch	1.75 in
Dimension - Length Overall inch	8.00 in

Force Related

Rating - Minimum Tensile Strength lbs	50
---------------------------------------	----

General

Trade Name	UNIRAP™
Sub Brand	UNIRAP,CABLE TIE
Series	UNIRAP™ Series
Color	Natural
Type	Standard
UPC 14 Digit GTIN	00781810335246
Material	NYLON 6/6
UPC	781810335246

Logistics

Minimum Pack Quantity	100
Carton Quantity	5000
Pallet Quantity	99999

Operational

Operating Temperature Celcius Max	85 °C
Operating Temperature Celcius Min	-40 °C

Product Assets

[Catalog \[English\]](#)