

## SPECIFICATION & FEATURES

### DESCRIPTION:

Orbit Industries' 4" Octagon (40) Boxes and Extension Rings are used in the installation of light fixtures and other electrical devices in walls and ceilings. They are constructed from 16 gauge galvanized steel. The multiple knockouts allow for easy installation. Our selection includes side brackets, bar hangers, and sliding brackets to suit specific needs.

### CERTIFICATION:

UL file E227970, conforms to UL514A.  
 For Fixture/Luminaire Support of 50 lbs or less  
 (For all boxes except 4RB-50-EXT and 4RB-MKO-EXT)  
 4RB-50-BHA is at 16" span

### FEATURES

#### Knockout:

**50:** 1/2" K.O.

**MKO:** Moon K.O. (1/2" and 3/4" K.O.)

#### Bracket:

**FB:** (L: 7-1/4", W: 3/4") Offset (1/2") Mounts on flat side of stud or joist

**LB:** (L: 2-3/8", W: 2-23/32") With spurs, slotted holes for toe-nailing.



#### Bar Hanger:

**BHA:** Adjustable Bar Hanger allows installation of box anywhere along length of stud. Cables with ground

#### Mfg. Process:

WELDED

## 4" OCTAGON (40) WELDED BOXES & EXTENSION RINGS 1-1/2" DEEP

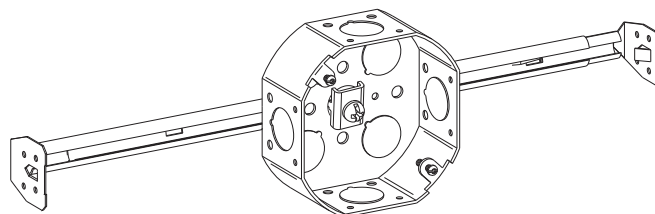

### DIMENSIONS

**Diameter:** 4"

**Depth:** 1-1/2"

**Cu.In.:** 15.5

### CONFIGURATION DATA

Catalog No.	Bracket & Setback	Knockouts		Std. Pkg.
		Sides	Bottom	
4RB-50	-	(4)-1/2"	(5)-1/2"	50
4RB-MKO	-	(2)-1/2", (2)-MKO	(3)-1/2", (2)-3/4"	50
4RB-50-FB	FB, 1/2"	(3)-1/2"	(5)-1/2"	50
4RB-MKO-FB	FB, 1/2"	(1)-1/2", (2)-MKO	(3)-1/2", (2)-3/4"	50
4RB-50-LB	LB, Flush	(4)-1/2"	(5)-1/2"	50
4RB-50-BHAC	Adjustable from 16" to 24"	(4)-1/2"	(4)-1/2"	25
4RB-50-EXT	-	(4)-1/2"	-	50
4RB-MKO-EXT	-	(2)-1/2", (2)-MKO	-	50

