

70-725-1

Socket, SE Relays, 30A, 6 pins, screw connectors, separate contact, for 725 power relay



Main

Product Range	Harmony Electromechanical Relays
Product Type	Socket
Number of Terminals	6
Switch Function	DPST
Contact Composition	2 NO

Complementary

Rated Current	30 A
[Ue] rated operational voltage	300 V
Connections Terminals	Screw terminal, clamping connection capacity:6 mm ² , AWG 10 solid Screw terminal, clamping connection capacity:2 x 0.5...2 x 6 mm ² , AWG 20...AWG 10 stranded
Tightening Torque	Screw 1.2 N.m
Fixing Mode	Clip-on 35 mm symmetrical DIN rail
Product Weight	2.36 oz (67 g)
Depth	2.78 in (70.5 mm)

Environment

Flame Retardance	UL94-V0
------------------	---------

Ordering and shipping details


Category	21127-ZELIO ICE CUBE RELAYS
Discount Schedule	CP2
GTIN	3606480277986
Returnability	Yes
Country of origin	TW

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.79 in (7.08 cm)
Package 1 Width	2.13 in (5.4 cm)
Package 1 Length	0.93 in (2.35 cm)
Package 1 Weight	2.36 oz (67 g)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions

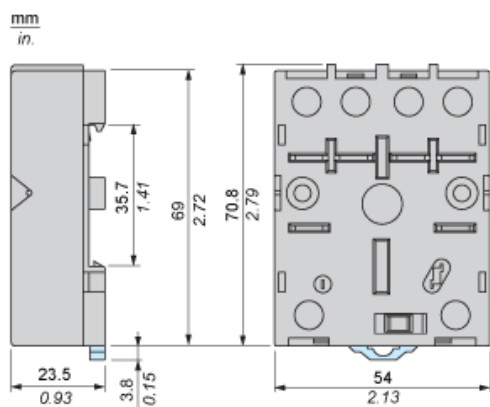

Wiring Diagram

