

Product data sheet

Specifications



network switch, Modicon Networking, standard unmanaged, 8 ports for copper

MCSESU083FN0

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon Networking
Product or Component Type	Ethernet TCP/IP unmanaged switch
Communication Port Protocol	Ethernet TCP/IP
Port Ethernet	10/100BASE-TX - 8 copper cable
Maximum number of switches in cascade	Unlimited

Complementary

Integrated connection type	Shielded RJ45 copper cable
Transmission support medium	Twisted shielded pairs cable CAT 5E copper cable
Maximum cable distance between devices	328.08 ft (100 m) copper cable
[Us] rated supply voltage	12...24 V
Supply voltage limits	9.6...32 V DC SELV
Power Consumption in W	1.5 W
Electrical connection	Removable connector 3 ways power supply
Mounting Support	35 mm symmetrical DIN rail
Marking	CE UL RCM
Local signalling	1 LED (green) for power supply 1 LED per channel (yellow) for data rate (ETH LINK) 1 dual colour LED (green/yellow) for link status
Ethernet cabling system	TF switches
Width	1.5 in (38 mm)
Height	4.02 in (102 mm)
Depth	3.1 in (79 mm)
Net Weight	0.33 lb(US) (0.15 kg)

Environment

Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Relative Humidity	10...95 % non-condensing
IP Degree of Protection	IP30
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Standards	UL 61010-2-201 EN/IEC 61131-2
Product certifications	CE UL RCM EAC UKCA

Ordering and shipping details

Category	US1PC1118121
Discount Schedule	PC11
GTIN	3606481029553
Returnability	Yes
Country of origin	DE

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.362 in (6.000 cm)
Package 1 Width	6.496 in (16.500 cm)
Package 1 Length	9.528 in (24.200 cm)
Package weight(Lbs)	10.300 oz (292.000 g)
Unit Type of Package 2	S04
Number of Units in Package 2	20
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	15.748 in (40.000 cm)
Package 2 Length	23.622 in (60.000 cm)
Package 2 Weight	14.974 lb(US) (6.792 kg)
Unit Type of Package 3	P12
Number of Units in Package 3	80
Package 3 Height	16.535 in (42.000 cm)
Package 3 Width	31.496 in (80.000 cm)
Package 3 Length	47.244 in (120.000 cm)
Package 3 Weight	84.217 lb(US) (38.200 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number

Ab11fc05-8d52-4207-bfaf-e10ca2305388

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

[Circularity Profile](#)

[End of Life Information](#)

Take-back

No

Dimensions Drawings

Dimensions

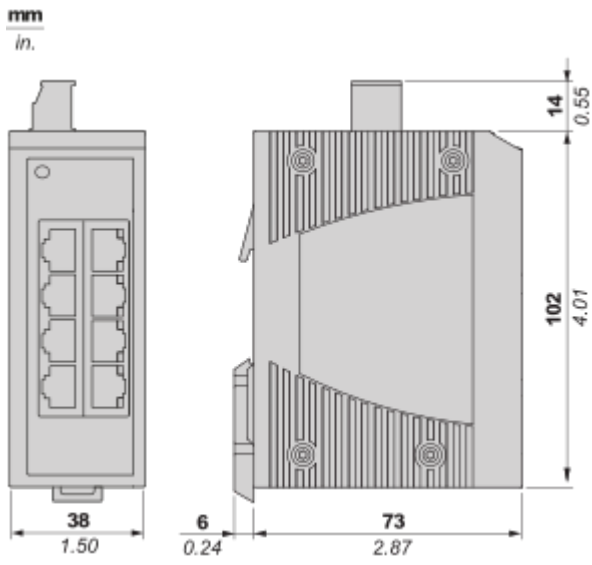


Image of product / Alternate images

Alternative





