



Color: Bronze

Weight: 1.4 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	20W
120V	0.20A	Color Temp	3000K-5000K
208V	N/A	Color	81/84/84 CRI
240V	N/A	Accuracy	
277V	N/A	L70 Lifespan	100,000 Hours
Input Watts	19.6/19.7/19.8W	Lumens	2,000/2,072/2,094 lm
		Efficacy	102/105.2/105.8 lm/W

Technical Specifications

Field Adjustability

Color Tunable:
3 discrete color temperatures

Compliance

UL Listed:
Suitable for wet locations

IP Rating:
Ingress protection rating of IP65 for dust and water

IESNA LM-79 & LM-80 Testing:
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Trade Agreements Act Compliant:
This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:
This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-PST1KW

LED Characteristics

LEDs:
Long-life, high-efficacy, discrete, surface-mount LEDs

Color Consistency:
7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Uniformity:
RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

Electrical

Driver:
20W: Constant Current, Class 1, 120V, 60 Hz, 120V: 0.20A

THD:
13.37% at 120V

Power Factor:
97.9% at 120V

Dim to Off:
No

Aux Power Supply:
No

Photocell:
Integrated photocell included with on/off switch (factory default: off)

Sensor Settings

Surge Protection:
1kV

Performance

Lifespan:
100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction

Cold Weather Starting:
The minimum starting temperature is -20°C (-4°F)

Maximum Ambient Temperature:
Suitable for use in up to 50°C (122°F)

Housing:
Polycarbonate

Reflector:
Polycarbonate

Effective Projected Area:
2000 square foot

Technical Specifications (continued)

Lens:
Polycarbonate lens

Finish:
Formulated for high durability and long-lasting color

Green Technology:
Mercury and UV free. RoHS-compliant components.


Installation

Mounting:
Wall mount

Other

5 Yr Limited Warranty:
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

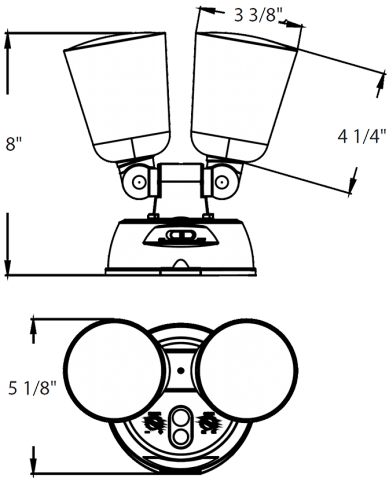

Features

- 100,000-Hour LED lifespan
- DLC Listed
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Color Temp	Finish	Driver
L2X				
Blank = 20W Blank = 3000-5000K Tunable Blank = Bronze Blank = 120V, Stepless Dimming				
W = White B = Black				