

Product data sheet

Specifications

SQUARE D



Box, I-Line Panelboard, HCJ, 32in W x 73in H x 9.5in D, Type 1

HC3273DB9

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	I-Line
Product or Component Type	Enclosure
Device Application	Panelboard
Device short name	HCM

Complementary

Line Rated Current	600 A 800 A
Enclosure nominal width	32.008 in (813 mm)
Enclosure nominal height	73.0 in (1854 mm)
Enclosure nominal depth	9.5 in (241 mm) 8.3 in (210 mm)
Net Weight	120.24 lb(US) (54.54 kg)
Height	73 in (1854.2 mm)
Depth	9.5 in (241.3 mm)

Environment

NEMA Degree of Protection	NEMA 1
Standards	UL CSA

Ordering and shipping details

Category	US1PE1A07979
Discount Schedule	PE1A
GTIN	785901557548
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.49 in (24.1 cm)
Package 1 Width	32.20 in (81.8 cm)
Package 1 Length	72.80 in (184.9 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package weight(Lbs) 101.999 lb(US) (46.266 kg)

Contractual warranty

Warranty 18 months

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant with Exemptions

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

Circularity Profile



No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

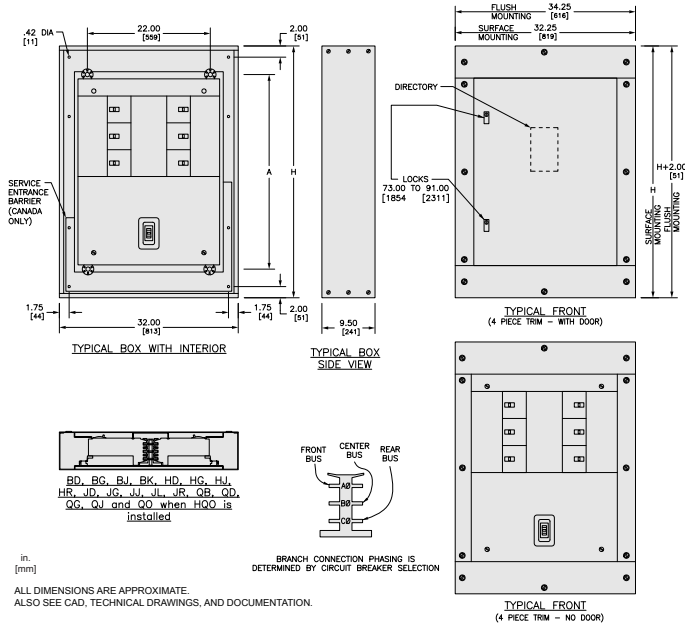

BD, BG, BJ, BK, HD, HG, HJ, HR, JD, JG, JJ, JL, JR, QD, QD, QG, QJ and QO when HGO is installed

in. [mm]

ALL DIMENSIONS ARE APPROXIMATE. ALSO SEE CAD, TECHNICAL DRAWINGS, AND DOCUMENTATION.

BRANCH CONNECTION PHASING IS DETERMINED BY CIRCUIT BREAKER SELECTION

Main Breaker: LA, LH, LD, LG, LJ, LI

MAXIMUM MAIN BREAKER AMPERE RATING	BRANCH BREAKER MOUNTING SPACE (INCHES)	H		A	
		IN	MM	IN	MM
400	27	73.00	1854	47.10	1196
	45	81.00	2057	51.10	1300
	81	91.00	2311	65.10	1654