


1PBS250, UV Rated Black Splicer/Reducer, 2, #10-250 kcmil

By Burndy
Catalog # 1PBS250

UV Rated Black UNITAP™ Splice/Reducer

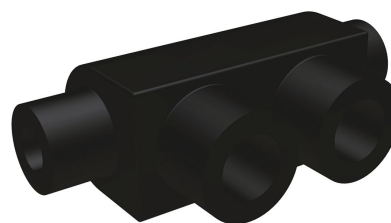

Features

- UV Rated Covering over AL6061-T6 aluminum body saves time, lowering installation costs and eliminates taping
- Oxide inhibitor pre-installed inhibits moisture and contaminants from entering the contact area
- Range-taking capability reduces the number of connectors necessary to carry in inventory

Application

For Indoor Use Only, Copper Or Stranded Aluminum

Specifications

Buy American Compliant	Contact Manufacturer
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Buy America(n) Qualified	Contact Manufacturer
Certification - ETL	No
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	No
UL Listed	Yes
Certification - UL Listed Direct Burial	No

Conductor

Conductor - Copper Str Size	10 AWG;9 AWG;8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG;1 AWG;1/0 ;2/0 AWG;3/0 AWG;4/0 AWG;250 kcmil
Conductor - AL Str Size	10 AWG;9 AWG;8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG;1 AWG;1/0 ;2/0 AWG;3/0 AWG;4/0 AWG;250 kcmil
Conductor - AL Str Size Range	10 AWG - 250 kcmil
Conductor Size	10 AWG-250 KCMIL
Conductor - Copper Str Size Range	10 AWG - 250 kcmil
Conductor Type	AL C Str-Size;CU C Str-Size

Configuration

Physical Attribute - Number of Screws	2
---------------------------------------	---

Connector Type	Multi Tap
Number Of Ports	2

Current

Voltage - Maximum	600 V
-------------------	-------

Dimensions

Dimension - L Length Overall mm	102 mm
Dimension - Height inch	2.10 in
Dimension - Height mm	53.3 mm
Dimension - Screw Size inch	5/8
Width	1.19 in
Dimension - Width fraction	1-19/100 in
Dimension - Width inch	1.19 in
Dimension - Width mm	30 mm
Length	4.01 in
Dimension - Length Overall inch	4.01 in
Height	2.1 in
Dimensions	4.01 in x 1.19 in x 2.1 in

Force Related

Installation Torque Recommended in-lb	275 in-lb
---------------------------------------	-----------

General

Material - Hardware	Aluminum
Insulation Type	Plastisol
Trade Name	UNITAP™
Insulation	Y
Sub Brand	UNITAP
Plated	N
Type	BIBS, Multi-Port
UPC 12 Digit	781810295915
UPC 14 Digit GTIN	00781810295915
Material	Aluminum
Hex Key	5/16
Plating Type	Unplated
UPC	781810295915

Logistics

Minimum Pack Quantity	1
Carton Quantity	90
Pallet Quantity	3240

Operational

Temperature Rating

194° F

Product Assets

[Catalog \[English\]](#)

[Catalog \[English\]](#)



A Hubbell brand

© 2025 Hubbell Incorporated. All rights reserved
BRDY-IPBS250-SPEC-EN | REV 11/2025