

Product data sheet

Specifications

SQUARE D



Mini circuit breaker, QOU, 30A, 3 pole, 240VAC, 10kA

QOU330

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Miniature circuit-breaker
Range of Product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR rated

Complementary

Line Rated Current	30 A
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC 240 V AC 120 V AC 48 V DC
Mounting Mode	Unit mount
AWG gauge	AWG 14...AWG 2 aluminium/copper
Height	4.05 in (102.87 mm)
Width	2.25 in (57.15 mm)
Depth	2.95 in (74.93 mm)
Tightening torque	45 lbf.in (5.08 N.m) (AWG 14...AWG 2)

Environment

Product Certifications	CSA UL Listed IEC
------------------------	-------------------------

Ordering and shipping details

Category	US10DE200900
Discount Schedule	0DE2
GTIN	785901418924
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 1 Height	2.50 in (6.35 cm)
Package 1 Width	3.60 in (9.144 cm)
Package 1 Length	4.80 in (12.192 cm)
Package weight(Lbs)	17.600 oz (498.952 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	20
Package 2 Height	3.50 in (8.89 cm)
Package 2 Width	13.40 in (34.036 cm)
Package 2 Length	20.50 in (52.07 cm)
Package 2 Weight	22.851 lb(US) (10.365 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	960
Package 3 Height	40.00 in (101.6 cm)
Package 3 Width	40.00 in (101.6 cm)
Package 3 Length	48.00 in (121.92 cm)
Package 3 Weight	1086.0002 lb(US) (492.601 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 20

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant

SCIP Number Af42fb01-813d-40c0-ae28-b8b3299dbc99

REACH Regulation [REACH Declaration](#)

Halogen content performance Halogen free product

Use Again


Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No

Technical Illustration

Dimensions

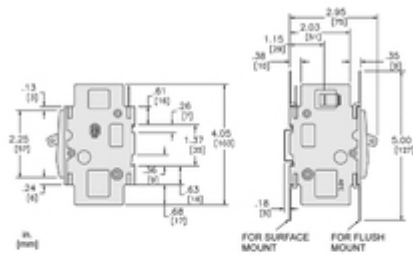

2.50 [64] MIN. WIRE BENDING SPACE FOR 2 AWG
 1.50 [38] MIN. WIRE BENDING SPACE FOR 14 AWG
 TYP. BOTH ENDS FOR ALL CTS SHOWN PER ARTICLE 430-1-100 NEC

