




U8212-XL

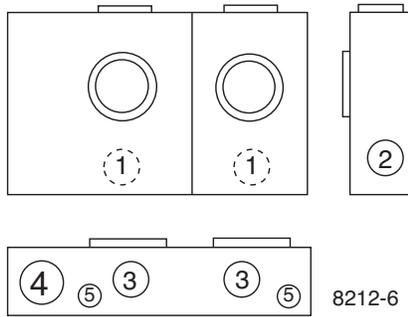

SIDE WIREWAY

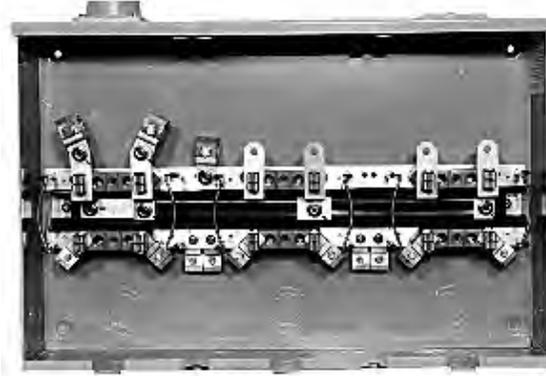

U7363-DL

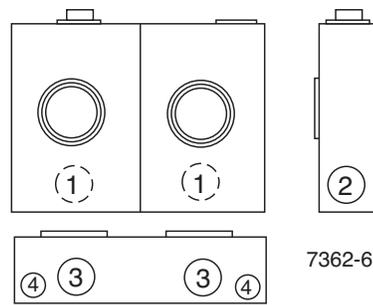

FOR OVERHEAD SERVICE ENTRANCE USE

100 AMP / POSITION- 4 TERMINAL-RINGLESS

| NO. OF POS. | CATALOG NUMBER | HUB  | CONNECTOR CU/AL |        | BY-PASS | DIMENSIONS                    |                                  |    | CONCENTRIC K.O.'S |   |   |   |   |   |
|-------------|----------------|------|-----------------|--------|---------|-------------------------------|----------------------------------|----|-------------------|---|---|---|---|---|
|             |                |      | LINE            | LOAD   |         | D"                            | W"                               | H" | 1                 | 2 | 3 | 4   | 5   | 6 |
| 2           | U8212-XL       | C.P. | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 20 <sup>5</sup> / <sub>16</sub>  | 16 | 2                 | 2 | 2 | 2 <sup>1</sup> / <sub>2</sub>                                 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | — |
| 3           | U8213-XL       | C.P. | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 28 <sup>1</sup> / <sub>2</sub>   | 16 | 2                 | 2 | 2 | 2 <sup>1</sup> / <sub>2</sub>                                 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | — |
| 4           | U8214-XL       | C.P. | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 40 <sup>11</sup> / <sub>16</sub> | 16 | 2                 | 2 | 2 | 2 <sup>1</sup> / <sub>2</sub>                                 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | — |
| 5           | U8215-XL       | C.P. | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 48 <sup>7</sup> / <sub>8</sub>   | 16 | 2                 | 2 | 2 | 2 <sup>1</sup> / <sub>2</sub>                                 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | — |
| 6           | U8216-XL       | C.P. | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 57 <sup>1</sup> / <sub>16</sub>  | 16 | 2                 | 2 | 2 | 2 <sup>1</sup> / <sub>2</sub>                                 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | — |
| 2           | U7362-DL       | 2"   | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 16 <sup>5</sup> / <sub>16</sub>  | 16 | 2                 | 2 | 2 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | —   | — |
| 3           | U7363-DL       | 2"   | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 24 <sup>1</sup> / <sub>2</sub>   | 16 | 2                 | 2 | 2 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | —   | — |
| 4           | U7364-DL       | 2"   | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 32 <sup>11</sup> / <sub>16</sub> | 16 | 2                 | 2 | 2 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | —   | — |
| 5           | U7365-DL       | 2"   | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 40 <sup>7</sup> / <sub>8</sub>   | 16 | 2                 | 2 | 2 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | —   | — |
| 6           | U7366-DL       | 2"   | #2-350 kcmil    | #6-2/0 | NO      | 4 <sup>1</sup> / <sub>2</sub> | 49 <sup>1</sup> / <sub>16</sub>  | 16 | 2                 | 2 | 2 | 1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub> | —   | — |

**HUB:** For proper hub selection refer to the hub suffix chart on the accessory page. Hub opening is supplied at each end. Extra opening is closed with a closing plate.

**FIFTH TERMINAL:** For field installed fifth terminal in 9 o'clock position, order **K1815** for each meter position. Refer to accessory page.

**CONNECTORS:** Extruded aluminum connectors are tin plated.

**BUSSING:** Bussing is 5/16" x 1" aluminum.

*Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment in this catalog.*



## INTERCHANGEABLE UNIT HUBS

**SMALL "RL" OPENING (STANDARD)**

**LARGE "R" OPENING (HEAVY DUTY)**



| SUFFIX | SIZE   | MILBANK CAT. NO. |
|--------|--------|------------------|
| -WL    | 1"     | A7514            |
| -YL    | 1 1/4" | A7515            |
| -ZL    | 1 1/2" | A7516            |
| -DL    | 2"     | A7517            |
| -EL    | 2 1/2" | A7518            |

| SUFFIX | SIZE   | MILBANK CAT. NO. |
|--------|--------|------------------|
| -F     | 3"     | A8110            |
| -G     | 3 1/2" | A8111            |
| -H     | 4"     | A8112            |

### HUB SUFFIX CHART

|            |   |           |        |                 |
|------------|---|-----------|--------|-----------------|
| <b>O</b>   | Plain Top   | <b>WL</b> | 1"     | For -RL Opening |
| <b>RL</b>  | Small Hub Opening                                 | <b>YL</b> | 1 1/4" | For -RL Opening |
| <b>R</b>   | Large Hub Opening                                 | <b>ZL</b> | 1 1/2" | For -RL Opening |
| <b>XL</b>  | Small Closing Plate                               | <b>DL</b> | 2"     | For -RL Opening |
| <b>X</b>   | Large Closing Plate                               | <b>EL</b> | 2 1/2" | For -RL Opening |
| <b>RXL</b> | Large Hub Opening adapted to small Closing Plate. | <b>F</b>  | 3"     | For -R Opening  |
|            |   | <b>G</b>  | 3 1/2" | For -R Opening  |
| <b>RRL</b> | Large Hub Opening adapted to small Hub Opening    | <b>H</b>  | 4"     | For -R Opening  |



**REMOVABLE HUB CLOSING PLATE**





**HUB ADAPTER PLATE**  
(Converts -R opening to -RL)  
**S8324**

| SIZE                          | SUFFIX | CAT. # |
|-------------------------------|--------|--------|
| STANDARD<br>(for -RL opening) | -XL    | A7551  |
| LARGE<br>(for -R opening)     | -X     | A9064  |

### POLE HANGER KIT

850 comes with 4 pole hangers

**CAT.NO. 850**

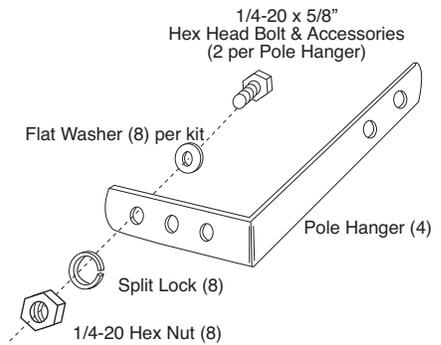

### TOUCH-UP PAINT



**A-GP61** ANSI 61 Gray For product date coded after 4/99  
**A-GP** Light Gray For product date coded before 4/99

| CATALOG NUMBER | DESCRIPTION OF POLE HANGER BRACKETS        |
|----------------|--|
| 850            | TWO PAIR (4 PIECES) WITH MOUNTING HARDWARE |

### CONNECTOR KITS



For use with 3/8"-16 stud type units only

**SINGLE**



**TWIN**



**TAP CONNECTORS**  
(3 per set)

**K4977-INT** INTERNAL HEX  
**K5022-INT** INTERNAL HEX

(K5022 Includes Safety Barrier Extensions – for applications over 300 VAC)

| SUFFIX | CATALOG # | (3 per set) – 1 Ø |
|--------|-----------|-------------------|
| K1     | K1539     | 350 MCM (MAX)     |
| K3     | K1540     | 600 MCM (MAX)     |

| SUFFIX | CATALOG # | (3 per set) – 1 Ø |
|--------|-----------|-------------------|
| K2     | K1350     | 350 MCM (MAX)     |
| K4     | K1541     | 600 MCM (MAX)     |

| SUFFIX | CATALOG # | (4 per set) – 3 Ø |
|--------|-----------|-------------------|
| K5     | K3082     | 350 MCM (MAX)     |
| K7     | K3441     | 600 MCM (MAX)     |

| SUFFIX | CATALOG # | (4 per set) – 3 Ø |
|--------|-----------|-------------------|
| K6     | K3442     | 350 MCM (MAX)     |
| K8     | K3083     | 600 MCM (MAX)     |