


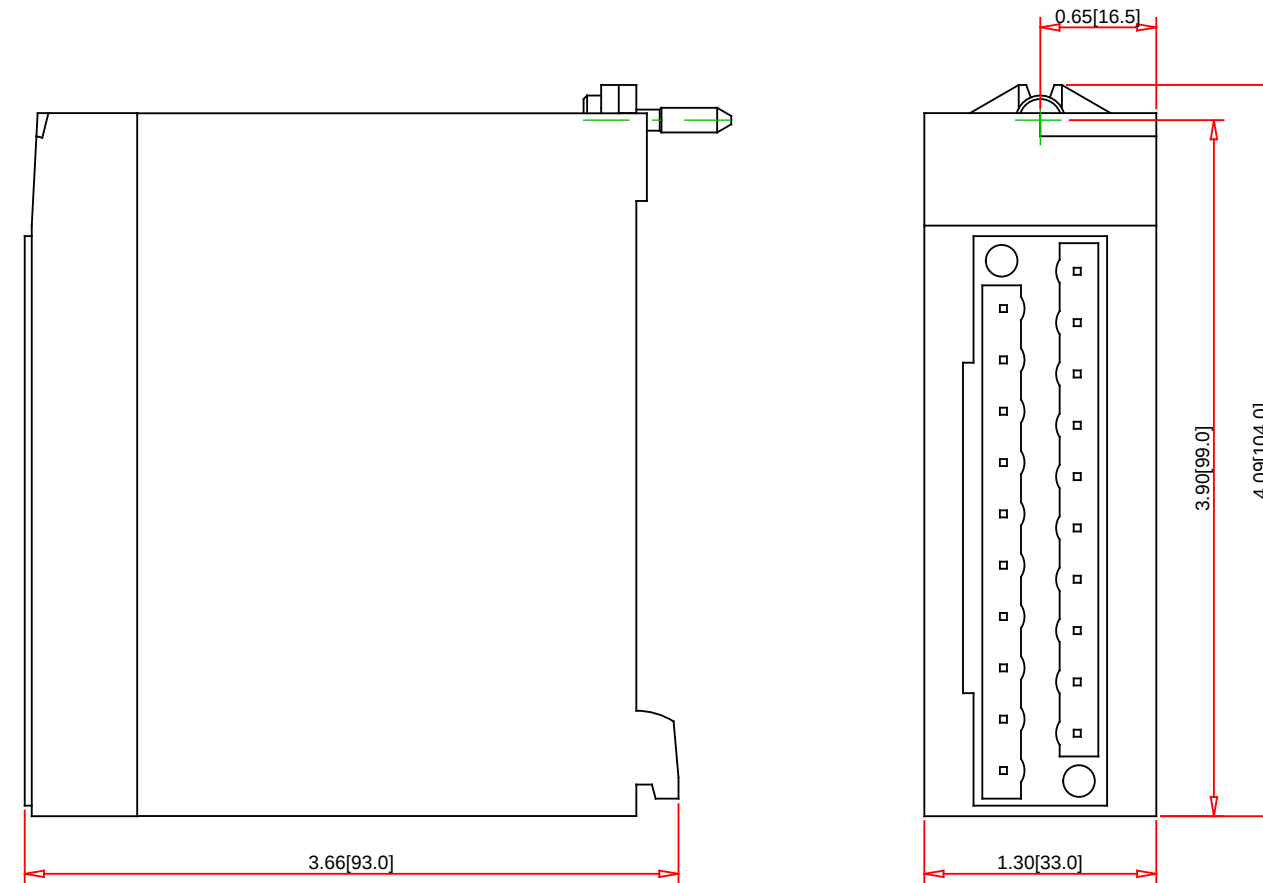

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
BMXAMO0802

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:
Mounting: Any slot except 0
Isolation Between Channels: 750 VDC
Isolation Between Channels and Bus: 1400 VDC
UL & CSA: Yes
CE: Yes
RoHS: Yes
Class 1 Div 2 CSA: Yes
GOST/BV/GL/RMRS/ABS: Yes
Weight [kg]: 0.175

Specification:
Description:
Selection: M340 PAC
Conf.Coating - 25C to 70C op.temp.: Yes
Input Voltage Range:
Input Current:
Output Voltage Range: ± 10 V
Output Current: 3 to 20 mA, 4 to 20 mA
Connection Type: BMXFTB2000/BMXFTB2010/BMXFTB2020/BMXFTW301/BMXFTW501/BMXFTW1001
Number of Inputs:
Number of Outputs: 8