



Ratings


Maximum Continuous Voltage.....	16.2 kV Phase-to-Ground
	28.0 kV Phase-to-Phase
Continuous Current.....	200 A

0.17 Sec. Duration.....	10,000 A rms Symmetrical
3.00 Sec. Duration.....	3,500 A rms Symmetrical

Insulation Withstand Voltages	
Basic Impulse Level.....	125 kV Crest (1.2 x 50 μ Sec. wave)
60 Hz (60 Sec.).....	45 kV rms
Partial Discharge Extinction Voltage (3 pC).....	21.5 kV rms

100% factory tested for Partial Discharge and either AC 60 Hz (45 kV for 60 Sec.) or Impulse (BIL) (125 kV 1.2 x 50 μ Sec. wave).

A black, cylindrical, handheld device, possibly a medical or laboratory instrument. It has a handle at the top and a long, thin, curved tube extending from the side. The device is shown in a three-quarter view, highlighting its cylindrical shape and the flexibility of the tube.

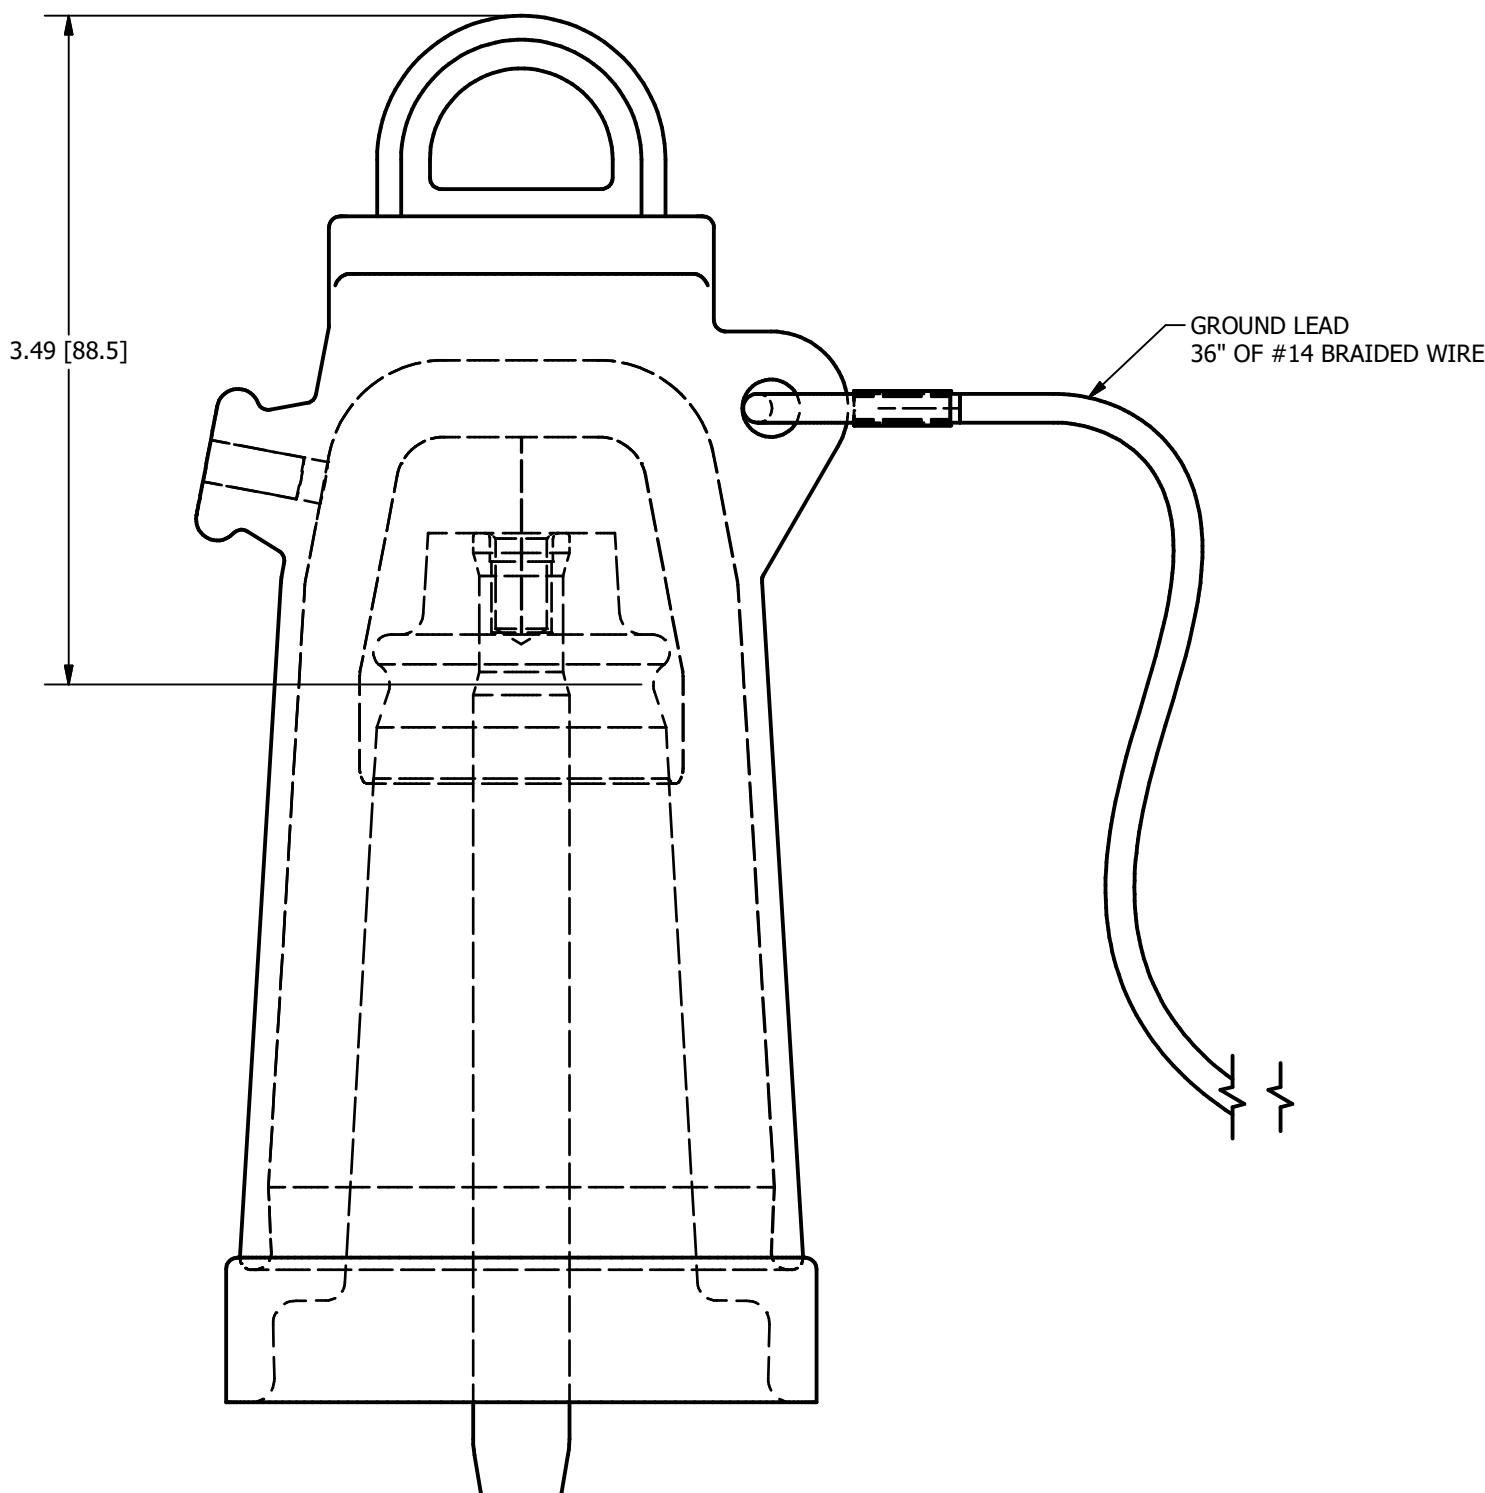

		 HUBBELL® POWER SYSTEMS, Inc.			
		TITLE 28KV 200A INSULATING CAP			
	CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	SIZE SB	DWG NO. --	CAT / PART / ASSY NO. 228IC	REV 1

REV DATE 06/23/2021	DO NOT SCALE THIS DRAWING	DRN BY BVB	DATE 06/23/2021	SHEET 1 OF 1
------------------------	---------------------------	------------	-----------------	--------------