

# Product data sheet

Specifications

SQUARE D



Mini switch, QO, 60A, 3 pole,  
240VAC, 10kA, bolt on

QOB300

Product availability: Non-Stock - Not normally stocked in distribution facility

## Main

Product	Miniature circuit-breaker
Range	QO
Current Rating	60 A
Voltage Rating	240 V AC
Mounting Type	Bolt-on
Number of Poles	3P
Electrical Connection	Box lugs

## Complementary

Interrupt Rating	10 kA 240 V AC
Number of Panel Spaces	3
Wire Size	AWG 8...AWG 2 copper or aluminium
Tightening Torque	44.3 lbf.in (5 N.m) 0.02...0.04 in <sup>2</sup> (10...25 mm <sup>2</sup> ) (AWG 8...AWG 2)
Height	3.5 in (89 mm)
Width	2.2 in (57 mm)
Depth	2.9 in (74 mm)
Net Weight	0.750 lb(US) (0.340 kg)

## Environment

Certifications	UL Listed CSA
Ambient Rating	104 °F (40 °C)

## Ordering and shipping details

Category	US10DE200015
Discount Schedule	0DE2
GTIN	785901587972
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

<b>Package 1 Height</b>	3.5 in (8.9 cm)
<b>Package 1 Width</b>	2.2 in (5.7 cm)
<b>Package 1 Length</b>	2.9 in (7.4 cm)
<b>Package weight(Lbs)</b>	12.000 oz (340.194 g)

---

## **Contractual warranty**

---

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Compliant

SCIP Number

Af42fb01-813d-40c0-ae28-b8b3299dbc99

REACH Regulation

[REACH Declaration](#)

Halogen content performance

Halogen free product

## Use Again

### Repack and remanufacture

Circularity Profile

No need of specific recycling operations


Take-back

No

Technical Illustration

Dimensions

---

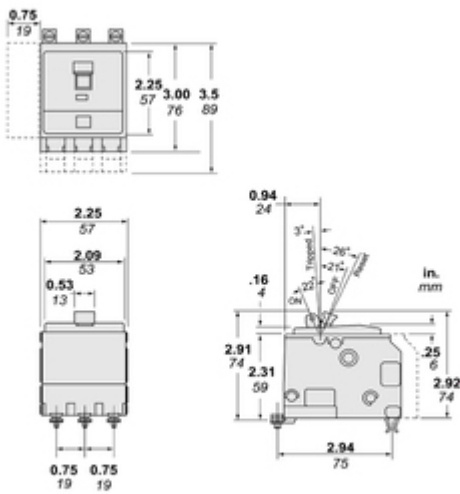

Dimensions are approximate. Refer to technical documentation for additional detail.